



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 1027R-WRF4+
(X9DRW-3LN4F+, Intel Xeon E5-2650 v2)

SPECfp®2006 = 99.4

SPECfp_base2006 = 95.1

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

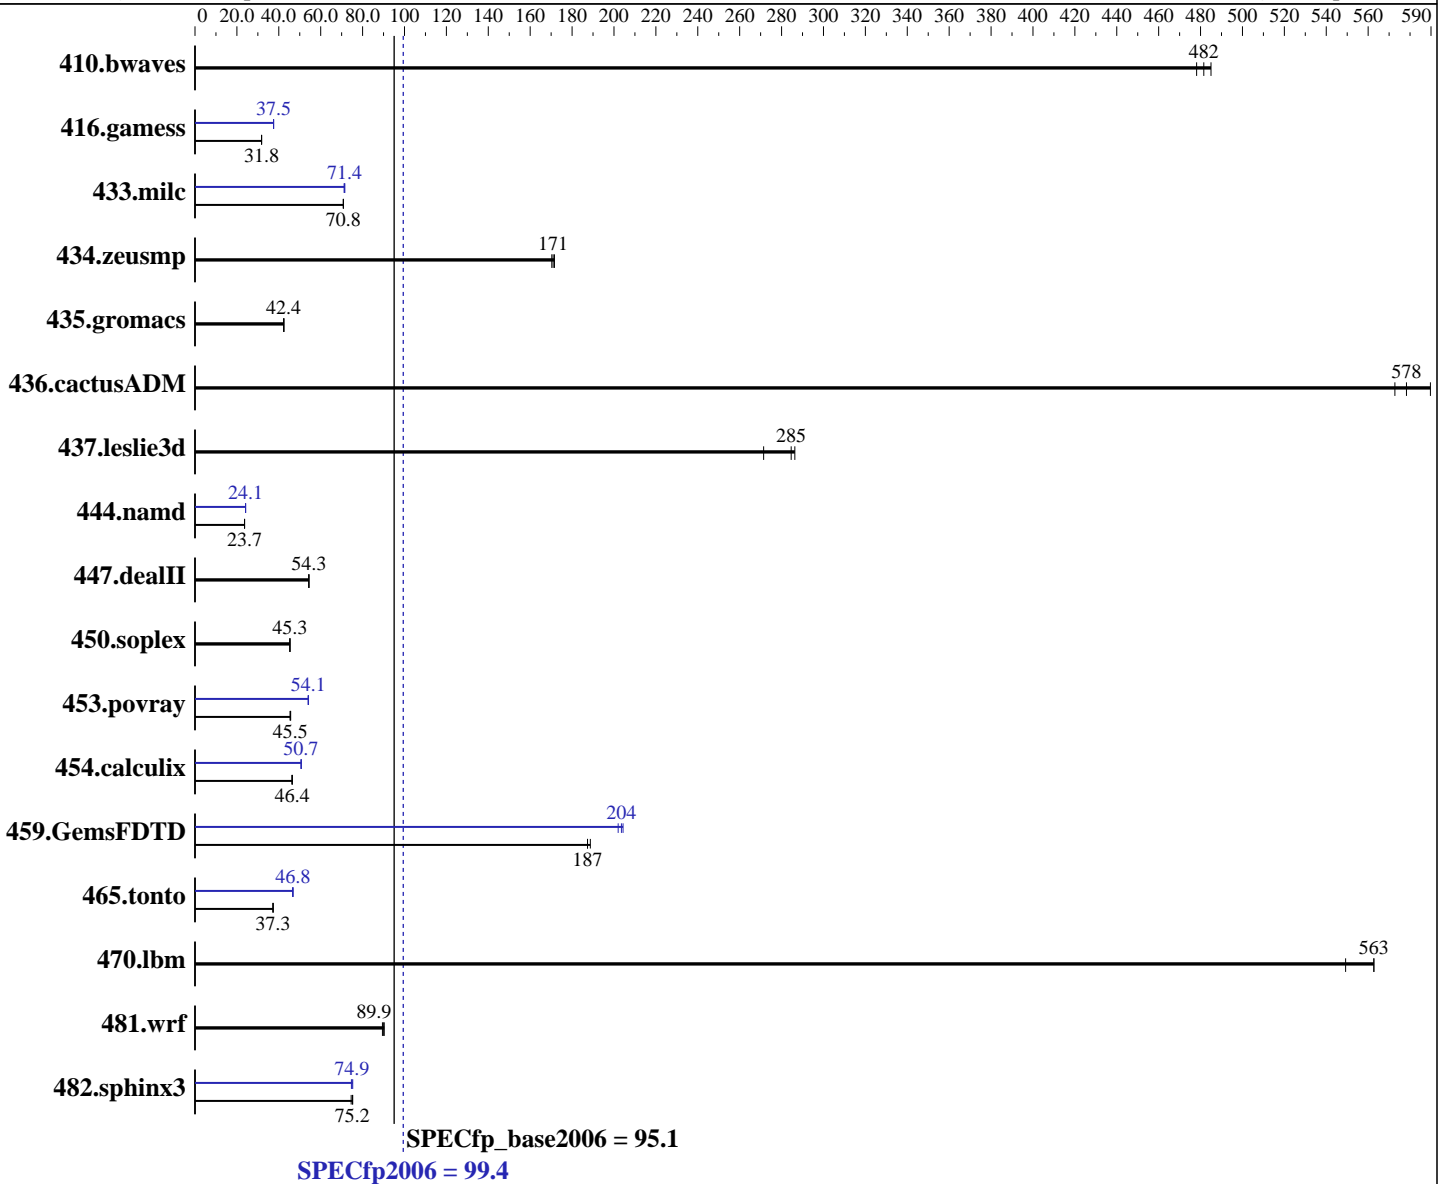

Hardware

CPU Name: Intel Xeon E5-2650 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.23.2.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 1027R-WRF4+
(X9DRW-3LN4F+, Intel Xeon E5-2650 v2)

SPECfp2006 = 99.4

SPECfp_base2006 = 95.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>28.2</u>	<u>482</u>	28.0	485	28.4	478	<u>28.2</u>	<u>482</u>	28.0	485	28.4	478
416.gamess	<u>616</u>	<u>31.8</u>	616	31.8	617	31.8	522	37.5	<u>522</u>	<u>37.5</u>	522	37.5
433.milc	130	70.9	<u>130</u>	<u>70.8</u>	130	70.8	129	71.2	128	71.5	<u>129</u>	<u>71.4</u>
434.zeusmp	<u>53.2</u>	<u>171</u>	53.0	172	53.4	170	<u>53.2</u>	<u>171</u>	53.0	172	53.4	170
435.gromacs	169	42.4	168	42.4	<u>169</u>	<u>42.4</u>	169	42.4	168	42.4	<u>169</u>	<u>42.4</u>
436.cactusADM	20.3	590	20.9	573	<u>20.7</u>	<u>578</u>	20.3	590	20.9	573	<u>20.7</u>	<u>578</u>
437.leslie3d	<u>33.0</u>	<u>285</u>	34.6	271	32.8	286	<u>33.0</u>	<u>285</u>	34.6	271	32.8	286
444.namd	<u>339</u>	<u>23.7</u>	339	23.6	339	23.7	<u>332</u>	<u>24.1</u>	332	24.1	332	24.2
447.dealII	210	54.4	<u>211</u>	<u>54.3</u>	211	54.3	210	54.4	<u>211</u>	<u>54.3</u>	211	54.3
450.soplex	184	45.2	<u>184</u>	<u>45.3</u>	184	45.4	184	45.2	<u>184</u>	<u>45.3</u>	184	45.4
453.povray	116	45.7	<u>117</u>	<u>45.5</u>	117	45.4	98.2	54.2	<u>98.3</u>	<u>54.1</u>	98.6	54.0
454.calculix	178	46.2	<u>178</u>	<u>46.4</u>	177	46.5	163	50.7	<u>163</u>	<u>50.7</u>	163	50.7
459.GemsFDTD	<u>56.6</u>	<u>187</u>	56.2	189	56.6	187	52.5	202	51.9	204	<u>52.1</u>	<u>204</u>
465.tonto	265	37.2	264	37.3	<u>264</u>	<u>37.3</u>	<u>210</u>	<u>46.8</u>	211	46.6	210	46.8
470.lbm	<u>24.4</u>	<u>563</u>	25.0	549	24.4	563	<u>24.4</u>	<u>563</u>	25.0	549	24.4	563
481.wrf	124	90.3	<u>124</u>	<u>89.9</u>	125	89.5	124	90.3	<u>124</u>	<u>89.9</u>	125	89.5
482.sphinx3	261	74.5	<u>259</u>	<u>75.2</u>	259	75.3	259	75.3	261	74.7	<u>260</u>	<u>74.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
Disable Hyper-threading

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
OMP_NUM_THREADS = "16"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 1027R-WRF4+
(X9DRW-3LN4F+, Intel Xeon E5-2650 v2)

SPECfp2006 = 99.4

SPECfp_base2006 = 95.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 1027R-WRF4+
(X9DRW-3LN4F+, Intel Xeon E5-2650 v2)

SPECfp2006 = 99.4

SPECfp_base2006 = 95.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 1027R-WRF4+
(X9DRW-3LN4F+, Intel Xeon E5-2650 v2)

SPECfp2006 = 99.4

SPECfp_base2006 = 95.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 1027R-WRF4+
(X9DRW-3LN4F+, Intel Xeon E5-2650 v2)

SPECfp2006 = 99.4

SPECfp_base2006 = 95.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:30:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2014.