



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4607 v2,
2.60 GHz)

SPECfp[®]2006 = **75.3**

SPECfp_base2006 = **72.8**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

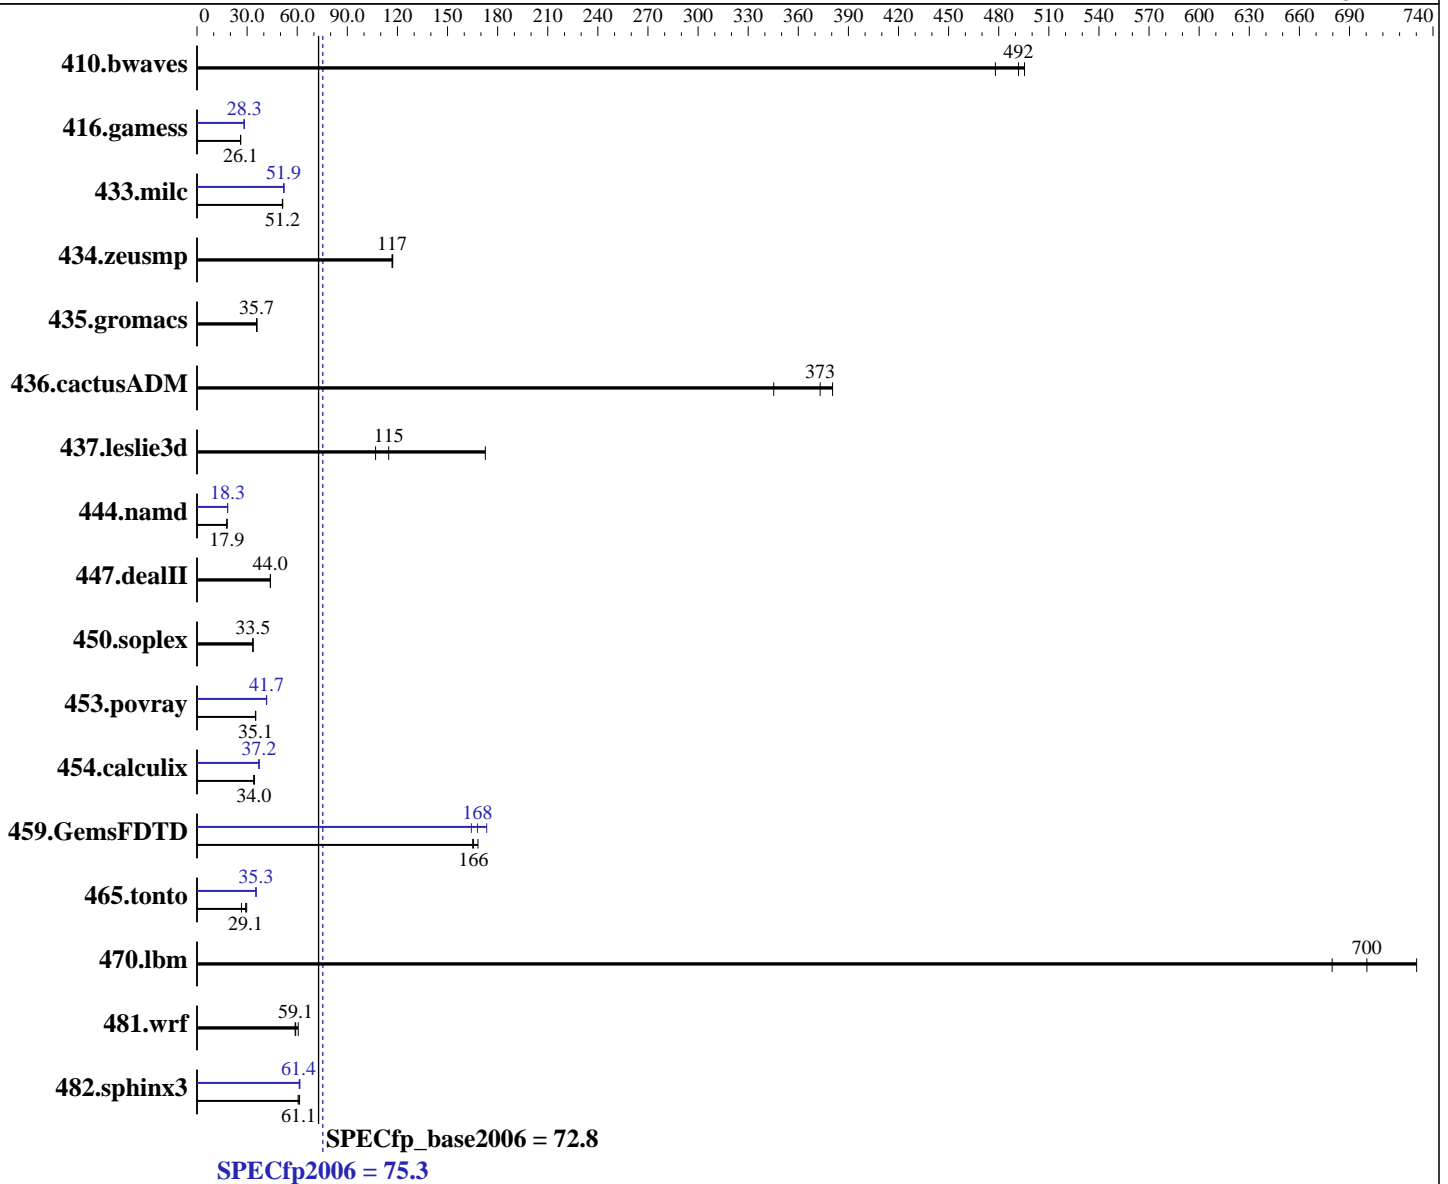

Hardware

CPU Name: Intel Xeon E5-4607 v2
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4607 v2, 2.60 GHz)

SPECfp2006 = **75.3**

SPECfp_base2006 = **72.8**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 160 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>27.6</u>	<u>492</u>	28.4	478	27.4	495	<u>27.6</u>	<u>492</u>	28.4	478	27.4	495
416.gamess	<u>750</u>	<u>26.1</u>	749	26.1	752	26.0	693	28.2	<u>693</u>	<u>28.3</u>	693	28.3
433.milc	179	51.3	<u>179</u>	<u>51.2</u>	180	51.1	177	51.9	176	52.1	<u>177</u>	<u>51.9</u>
434.zeusmp	77.9	117	<u>77.9</u>	<u>117</u>	77.7	117	77.9	117	<u>77.9</u>	<u>117</u>	77.7	117
435.gromacs	199	35.9	<u>200</u>	<u>35.7</u>	200	35.7	199	35.9	<u>200</u>	<u>35.7</u>	200	35.7
436.cactusADM	31.4	381	<u>32.0</u>	<u>373</u>	34.6	345	31.4	381	<u>32.0</u>	<u>373</u>	34.6	345
437.leslie3d	54.5	173	87.9	107	<u>81.9</u>	<u>115</u>	54.5	173	87.9	107	<u>81.9</u>	<u>115</u>
444.namd	<u>447</u>	<u>17.9</u>	448	17.9	447	18.0	<u>438</u>	<u>18.3</u>	438	18.3	438	18.3
447.dealII	<u>260</u>	<u>44.0</u>	260	44.0	260	43.9	<u>260</u>	<u>44.0</u>	260	44.0	260	43.9
450.soplex	249	33.5	<u>249</u>	<u>33.5</u>	249	33.5	249	33.5	<u>249</u>	<u>33.5</u>	249	33.5
453.povray	<u>152</u>	<u>35.1</u>	152	35.0	151	35.2	<u>128</u>	<u>41.7</u>	128	41.6	128	41.7
454.calculix	240	34.4	<u>242</u>	<u>34.0</u>	242	34.0	222	37.2	<u>222</u>	<u>37.2</u>	223	37.1
459.GemsFDTD	64.3	165	<u>64.1</u>	<u>166</u>	63.1	168	<u>63.2</u>	<u>168</u>	64.6	164	61.2	173
465.tonto	331	29.8	<u>338</u>	<u>29.1</u>	370	26.6	279	35.3	<u>278</u>	<u>35.3</u>	278	35.3
470.lbm	18.8	730	20.2	680	<u>19.6</u>	<u>700</u>	18.8	730	20.2	680	<u>19.6</u>	<u>700</u>
481.wrf	184	60.6	<u>189</u>	<u>59.1</u>	190	58.8	184	60.6	<u>189</u>	<u>59.1</u>	190	58.8
482.sphinx3	322	60.5	317	61.4	<u>319</u>	<u>61.1</u>	316	61.6	<u>318</u>	<u>61.4</u>	319	61.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Virtualization Technology disabled
Execute Disable disabled
System Profile set to Custom
ClE enabled
C States enabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on linux Wed Mar 19 11:01:09 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 75.3

PowerEdge R820 (Intel Xeon E5-4607 v2, 2.60 GHz)

SPECfp_base2006 = 72.8

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-4607 v2 @ 2.60GHz
 4 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 6
  siblings     : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
  physical 2: cores 0 1 2 3 4 5
  physical 3: cores 0 1 2 3 4 5
 cache size    : 15360 KB

```

```

From /proc/meminfo
MemTotal:      529392212 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsc_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

```

uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 19 10:43 last=S

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  139G   20G  118G  15% /

```

```

Additional information from dmidecode:
BIOS Dell Inc. 2.0.20 01/16/2014
Memory:
32x 00AD00B300AD HMT42GR7AFR4C-RD 16 GB 1333 MHz

```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 75.3

PowerEdge R820 (Intel Xeon E5-4607 v2, 2.60 GHz)

SPECfp_base2006 = 72.8

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

OMP_NUM_THREADS = "24"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4607 v2,
2.60 GHz)

SPECfp2006 = 75.3

SPECfp_base2006 = 72.8

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4607 v2,
2.60 GHz)

SPECfp2006 = 75.3

SPECfp_base2006 = 72.8

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 6



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4607 v2,
2.60 GHz)

SPECfp2006 = 75.3

SPECfp_base2006 = 72.8

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:35:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 April 2014.