



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei Huawei RH1288 v2

SPECfp®\_rate2006 = 261

SPECfp\_rate\_base2006 = 256

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

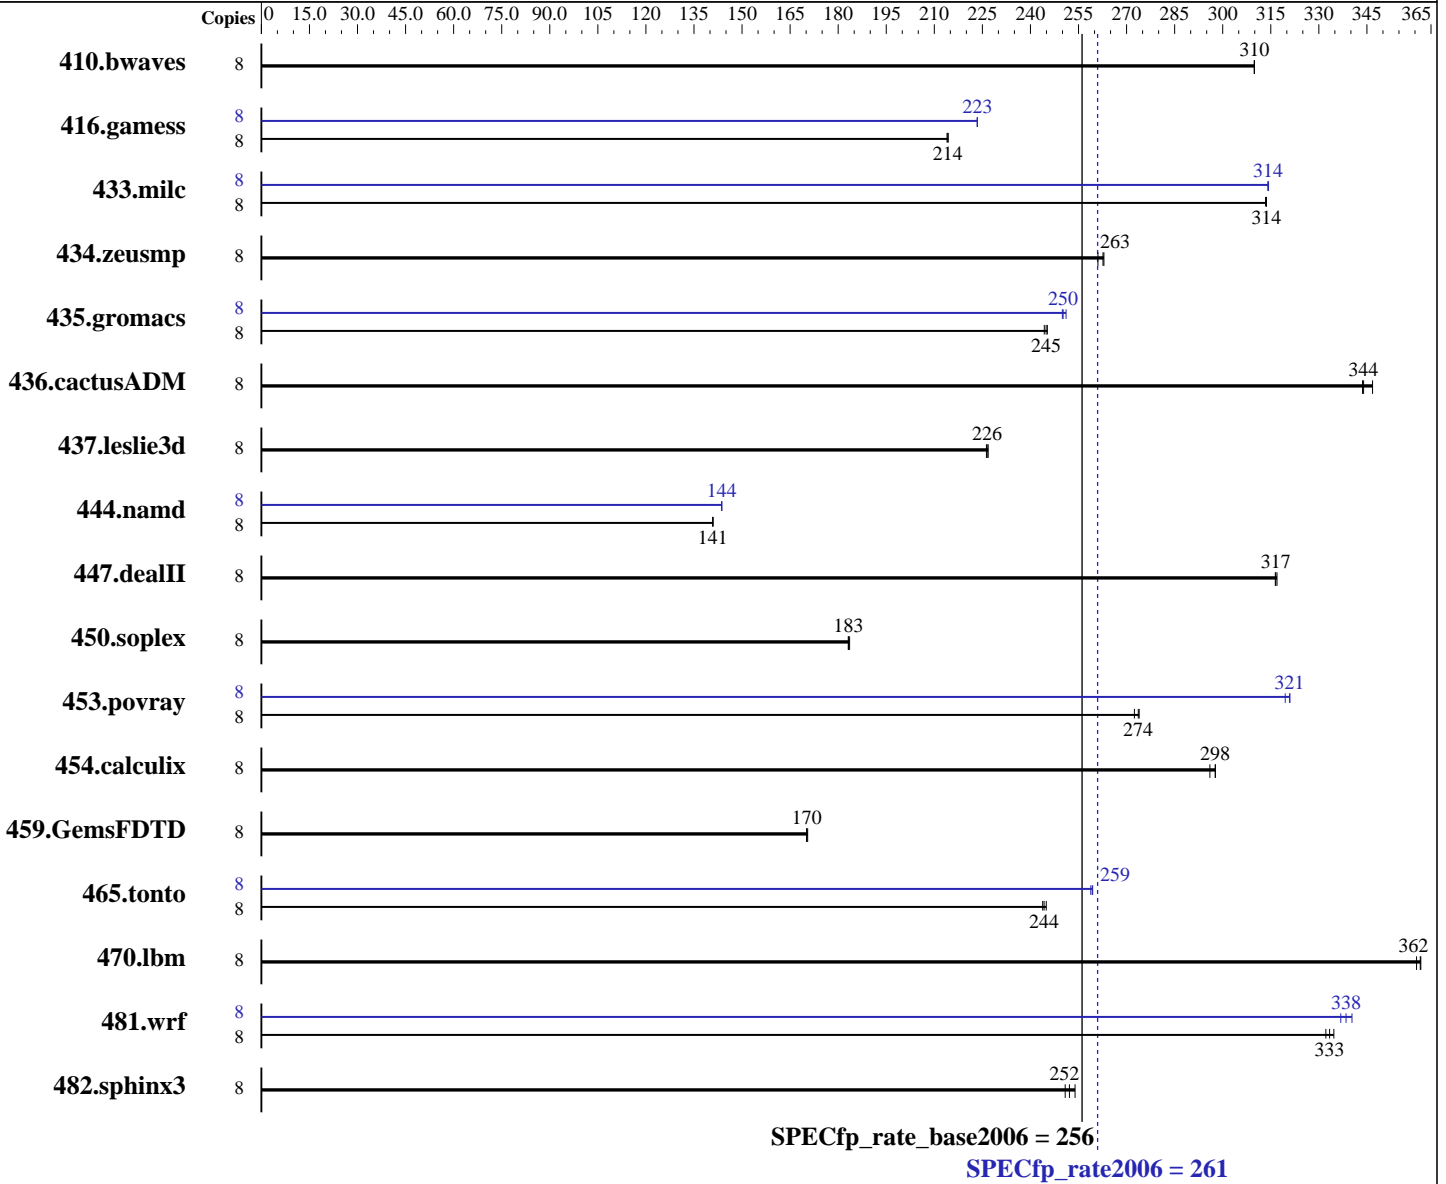

### Hardware

CPU Name: Intel Xeon E5-2609 v2  
 CPU Characteristics:  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei RH1288 v2

SPECfp\_rate2006 = 261  
SPECfp\_rate\_base2006 = 256

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jun-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10000RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	351	310	351	310	<u>351</u>	<u>310</u>	8	351	310	351	310	<u>351</u>	<u>310</u>
416.gamess	8	<u>731</u>	<u>214</u>	732	214	731	214	8	<u>701</u>	<u>223</u>	701	223	701	223
433.milc	8	<u>234</u>	<u>314</u>	234	313	234	314	8	234	314	<u>234</u>	<u>314</u>	234	314
434.zeusmp	8	<u>277</u>	<u>263</u>	277	263	279	261	8	<u>277</u>	<u>263</u>	277	263	279	261
435.gromacs	8	233	245	234	244	<u>233</u>	<u>245</u>	8	227	251	<u>228</u>	<u>250</u>	229	250
436.cactusADM	8	276	347	278	344	<u>278</u>	<u>344</u>	8	276	347	278	344	<u>278</u>	<u>344</u>
437.leslie3d	8	332	227	332	226	<u>332</u>	<u>226</u>	8	332	227	332	226	<u>332</u>	<u>226</u>
444.namd	8	<u>455</u>	<u>141</u>	455	141	455	141	8	447	144	447	144	<u>447</u>	<u>144</u>
447.dealII	8	<u>289</u>	<u>317</u>	289	316	289	317	8	<u>289</u>	<u>317</u>	289	316	289	317
450.soplex	8	<u>364</u>	<u>183</u>	363	184	364	183	8	<u>364</u>	<u>183</u>	363	184	364	183
453.povray	8	<u>156</u>	<u>274</u>	156	272	155	274	8	133	320	<u>133</u>	<u>321</u>	133	321
454.calculix	8	<u>222</u>	<u>298</u>	222	298	223	296	8	<u>222</u>	<u>298</u>	222	298	223	296
459.GemsFDTD	8	499	170	<u>499</u>	<u>170</u>	498	170	8	499	170	<u>499</u>	<u>170</u>	498	170
465.tonto	8	323	244	<u>322</u>	<u>244</u>	321	245	8	303	259	304	259	<u>304</u>	<u>259</u>
470.lbm	8	304	362	305	360	<u>304</u>	<u>362</u>	8	304	362	305	360	<u>304</u>	<u>362</u>
481.wrf	8	269	332	<u>268</u>	<u>333</u>	267	335	8	265	337	<u>264</u>	<u>338</u>	263	340
482.sphinx3	8	614	254	622	251	<u>618</u>	<u>252</u>	8	614	254	622	251	<u>618</u>	<u>252</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Baseboard Management Controller used to adjust the fan speed to 100%

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**  
**Huawei RH1288 v2**

**SPECfp\_rate2006 = 261**

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** Jun-2014  
**Hardware Availability:** Sep-2013  
**Software Availability:** Nov-2013

## Platform Notes (Continued)

```
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost Sat Jun 7 01:08:27 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264478184 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 6 16:39
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  272G   39G  219G  16% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. RMIBV629 05/12/2014
Memory:
13x Hynix HMT42GR7AFR4C-RD 16 GB 1333 MHz 2 rank
8x NO DIMM NO DIMM
3x Samsung M393B2G70DB0-CMA 16 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**  
**Huawei RH1288 v2**

**SPECfp\_rate2006 = 261**

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** Jun-2014  
**Hardware Availability:** Sep-2013  
**Software Availability:** Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
The Huawei RH2288H v2 and Huawei RH2288 v2 and the Huawei RH1288 v2 models are electronically equivalent.  
The results have been measured on a Huawei RH2288H v2 model

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 261

Huawei RH1288 v2

SPECfp\_rate\_base2006 = 256

CPU2006 license: 3175

Test date: Jun-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei RH1288 v2

SPECfp\_rate2006 = 261

SPECfp\_rate\_base2006 = 256

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jun-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH1288 v2

SPECfp\_rate2006 = 261

SPECfp\_rate\_base2006 = 256

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:03:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 July 2014.