



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1710**

Huawei RH5885 V3 (Intel Xeon E7-4870 v2)

**SPECint\_rate\_base2006 = 1670**

CPU2006 license: 3175


**Test date:** Jun-2014

**Test sponsor:** Huawei

**Hardware Availability:** Feb-2014

**Tested by:** Huawei

**Software Availability:** Feb-2013

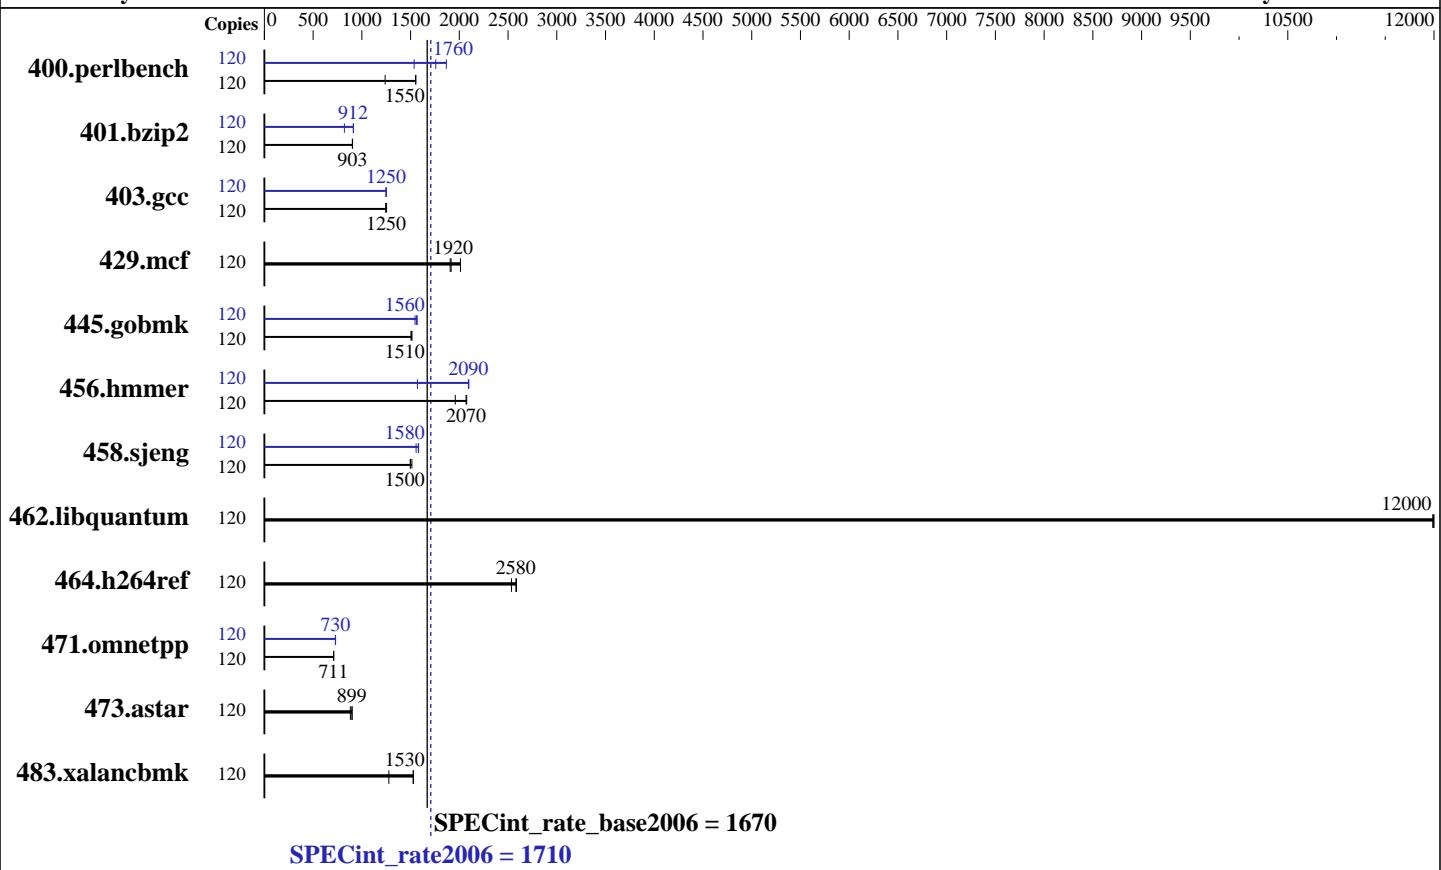

## Hardware

CPU Name:	Intel Xeon E7-4870 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	60 cores, 4 chips, 15 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3L-10600R-09, ECC)
Disk Subsystem:	2 x 600 GB SAS, 10K RPM
Other Hardware:	None

## Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1710**

Huawei RH5885 V3 (Intel Xeon E7-4870 v2)

**SPECint\_rate\_base2006 = 1670**

CPU2006 license: 3175

Test date: Jun-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Feb-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	120	<b>756</b>	<b>1550</b>	754	1550	946	1240	120	<b>667</b>	<b>1760</b>	763	1540	628	1870
401.bzip2	120	<b>1282</b>	<b>903</b>	1283	903	1280	905	120	<b>1267</b>	914	1410	821	<b>1269</b>	<b>912</b>
403.gcc	120	<b>773</b>	<b>1250</b>	771	1250	776	1250	120	<b>772</b>	1250	774	1250	<b>773</b>	<b>1250</b>
429.mcf	120	544	2010	574	1910	<b>571</b>	<b>1920</b>	120	544	2010	574	1910	<b>571</b>	<b>1920</b>
445.gobmk	120	<b>836</b>	<b>1510</b>	831	1510	836	1510	120	<b>807</b>	<b>1560</b>	803	1570	814	1550
456.hammer	120	<b>541</b>	<b>2070</b>	539	2080	572	1960	120	534	2100	713	1570	<b>535</b>	<b>2090</b>
458.sjeng	120	<b>969</b>	<b>1500</b>	970	1500	959	1510	120	918	1580	933	1560	<b>919</b>	<b>1580</b>
462.libquantum	120	207	12000	<b>207</b>	<b>12000</b>	207	12000	120	207	12000	<b>207</b>	<b>12000</b>	207	12000
464.h264ref	120	1027	2590	1048	2530	<b>1029</b>	<b>2580</b>	120	1027	2590	1048	2530	<b>1029</b>	<b>2580</b>
471.omnetpp	120	1056	710	1055	711	<b>1055</b>	<b>711</b>	120	1030	728	<b>1028</b>	<b>730</b>	1027	730
473.astar	120	936	900	<b>937</b>	<b>899</b>	955	882	120	936	900	<b>937</b>	<b>899</b>	955	882
483.xalancbmk	120	542	1530	<b>543</b>	<b>1530</b>	648	1280	120	542	1530	<b>543</b>	<b>1530</b>	648	1280

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock\_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on RH5885V3 Fri Jun 20 09:32:54 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4870 v2 @ 2.30GHz

4 "physical id"s (chips)

120 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1710

Huawei RH5885 V3 (Intel Xeon E7-4870 v2)

SPECint\_rate\_base2006 = 1670

CPU2006 license: 3175

Test date: Jun-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Feb-2013

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 15
siblings  : 30
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      264349704 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux RH5885V3 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 20 06:59
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5        ext4  516G   13G  477G   3%  /
```

Additional information from dmidecode:

```
BIOS American Megatrends Inc. BLISV035 03/7/2014
```

Memory:

```
16x 16 GB
16x Hynix HMT42GR7MFR4A-H9 16 GB 1333 MHz 2 rank
32x NO DIMM NO DIMM
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:

```
16x Hynix HMT42GR7MFR4A-H9 16 GB 1333 MHz 2 rank
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-4870 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECint\_rate2006 = 1710**

**SPECint\_rate\_base2006 = 1670**

Test date: Jun-2014

Hardware Availability: Feb-2014

Software Availability: Feb-2013

## General Notes (Continued)

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1710

Huawei RH5885 V3 (Intel Xeon E7-4870 v2)

SPECint\_rate\_base2006 = 1670

CPU2006 license: 3175

Test date: Jun-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Feb-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-4870 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint\_rate2006 = 1710

SPECint\_rate\_base2006 = 1670

Test date: Jun-2014

Hardware Availability: Feb-2014

Software Availability: Feb-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Jul 25 00:40:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 July 2014.