



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2650L v3,  
1.80 GHz)

**SPECfp®\_rate2006 = 629**

**SPECfp\_rate\_base2006 = 612**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

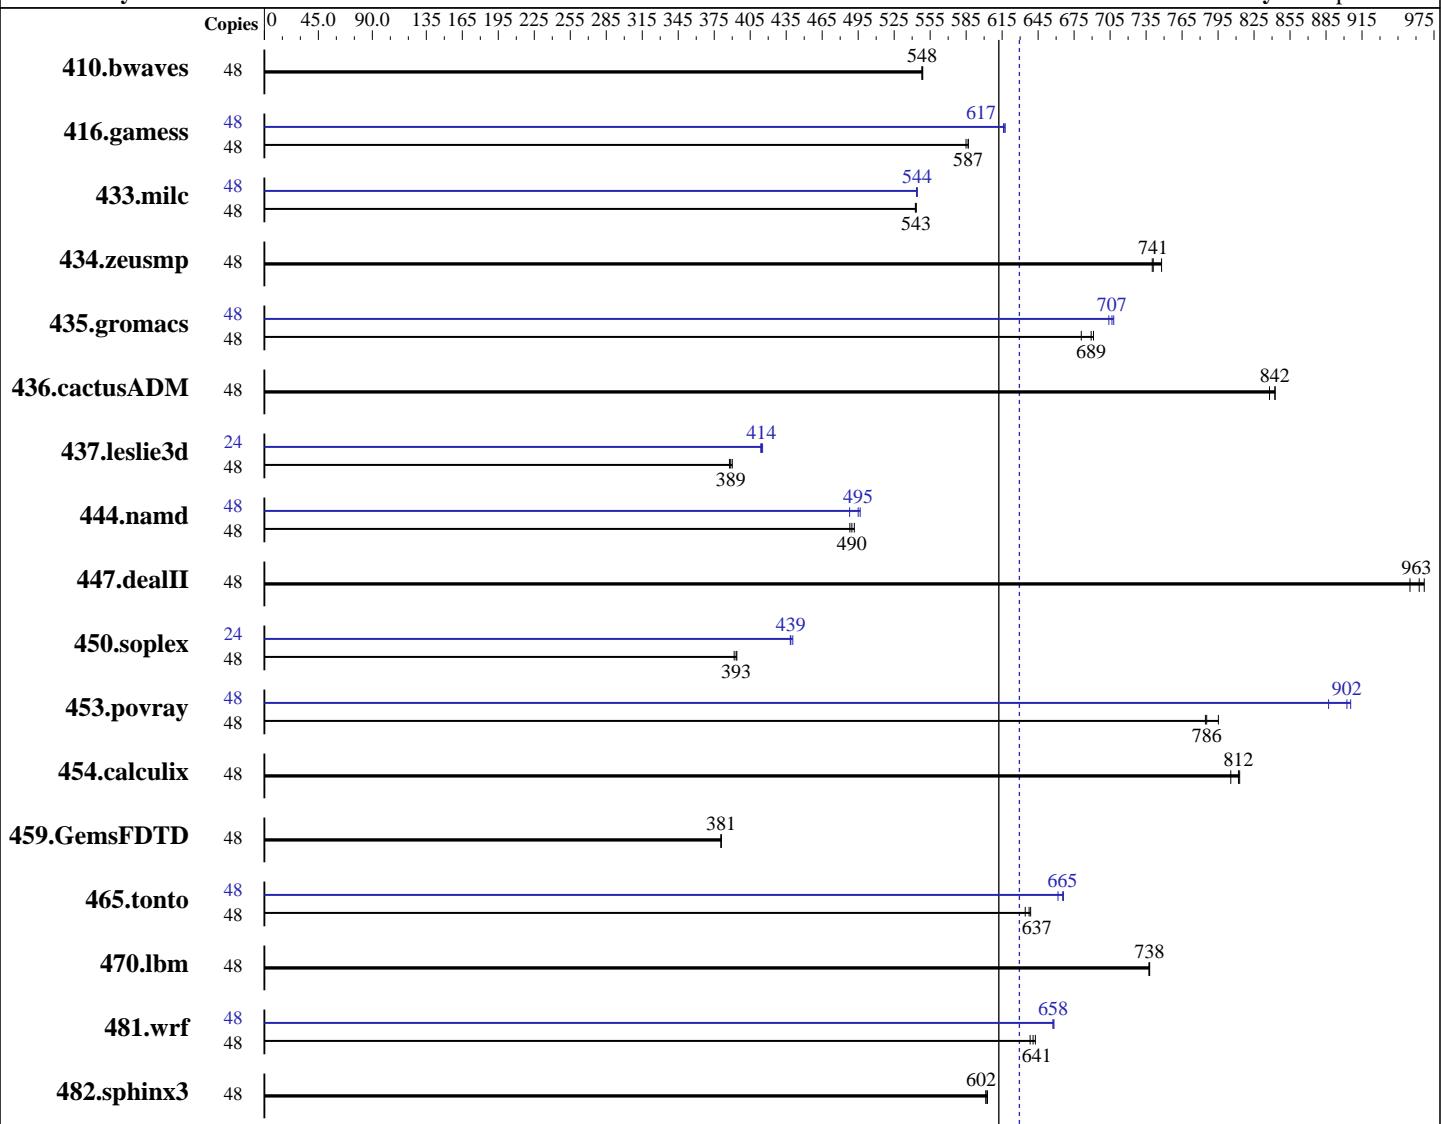

## Hardware

CPU Name: Intel Xeon E5-2650L v3  
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
CPU MHz: 1800  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
3.0.76-0.11-default  
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE  
for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran  
Studio XE for Linux  
Auto Parallel: No  
File System: ext2  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2650L v3,  
1.80 GHz)

**SPECfp\_rate2006 = 629**

**SPECfp\_rate\_base2006 = 612**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 1000 GB 7200 RPM SATA
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1189	549	1190	548	<b>1189</b>	<b>548</b>	48	1189	549	1190	548	<b>1189</b>	<b>548</b>
416.gamess	48	1607	585	<b>1602</b>	<b>587</b>	1602	587	48	1525	616	<b>1522</b>	<b>617</b>	1522	617
433.milc	48	812	543	811	543	<b>811</b>	<b>543</b>	48	<b>810</b>	<b>544</b>	810	544	811	544
434.zeusmp	48	584	748	<b>589</b>	<b>741</b>	590	740	48	584	748	<b>589</b>	<b>741</b>	590	740
435.gromacs	48	<b>497</b>	<b>689</b>	496	691	503	681	48	484	708	<b>485</b>	<b>707</b>	487	704
436.cactusADM	48	<b>681</b>	<b>842</b>	681	843	685	838	48	<b>681</b>	<b>842</b>	681	843	685	838
437.leslie3d	48	1164	388	1157	390	<b>1161</b>	<b>389</b>	24	545	414	543	415	<b>544</b>	<b>414</b>
444.namd	48	783	492	<b>786</b>	<b>490</b>	789	488	48	<b>778</b>	<b>495</b>	789	488	775	497
447.dealII	48	568	967	<b>570</b>	<b>963</b>	575	955	48	568	967	<b>570</b>	<b>963</b>	575	955
450.soplex	48	<b>1018</b>	<b>393</b>	1016	394	1022	392	24	454	441	<b>456</b>	<b>439</b>	457	438
453.povray	48	321	795	<b>325</b>	<b>786</b>	326	784	48	288	887	282	906	<b>283</b>	<b>902</b>
454.calculix	48	487	813	492	806	<b>488</b>	<b>812</b>	48	487	813	492	806	<b>488</b>	<b>812</b>
459.GemsFDTD	48	1338	381	<b>1337</b>	<b>381</b>	1337	381	48	1338	381	<b>1337</b>	<b>381</b>	1337	381
465.tonto	48	745	634	739	639	<b>741</b>	<b>637</b>	48	709	666	714	662	<b>710</b>	<b>665</b>
470.lbm	48	894	738	<b>894</b>	<b>738</b>	895	737	48	894	738	<b>894</b>	<b>738</b>	895	737
481.wrf	48	840	638	<b>837</b>	<b>641</b>	834	643	48	815	658	<b>815</b>	<b>658</b>	816	657
482.sphinx3	48	1555	601	<b>1555</b>	<b>602</b>	1552	603	48	<b>1555</b>	601	<b>1555</b>	<b>602</b>	1552	603

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2650L v3,  
1.80 GHz)

**SPECfp\_rate2006 = 629**

**SPECfp\_rate\_base2006 = 612**

**CPU2006 license:** 55

**Test date:** Jul-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Platform Notes (Continued)

```
Execute Disable disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Sat Jul 12 08:48:02 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2650L v3 @ 1.80GHz
        2 "physical id"s (chips)
        48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 12
        siblings : 24
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      264571712 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 11 11:24 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  726G   11G  715G   2%  /
```

Additional information from dmidecode:

BIOS Dell Inc. 0.3.25 06/19/2014

Memory:

16x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2133 MHz

8x Not Specified Not Specified

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2650L v3,  
1.80 GHz)

**SPECfp\_rate2006 = 629**

**SPECfp\_rate\_base2006 = 612**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2650L v3,  
1.80 GHz)

**SPECfp\_rate2006 = 629**

**SPECfp\_rate\_base2006 = 612**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2650L v3,  
1.80 GHz)

**SPECfp\_rate2006 = 629**

**SPECfp\_rate\_base2006 = 612**

**CPU2006 license:** 55

**Test date:** Jul-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
           -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2650L v3,  
1.80 GHz)

**SPECfp\_rate2006 = 629**

**SPECfp\_rate\_base2006 = 612**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Oct 10 14:26:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 October 2014.