



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint®\_rate2006 = 464

## Huawei CH222 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 448

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Mar-2012

Software Availability: Nov-2013

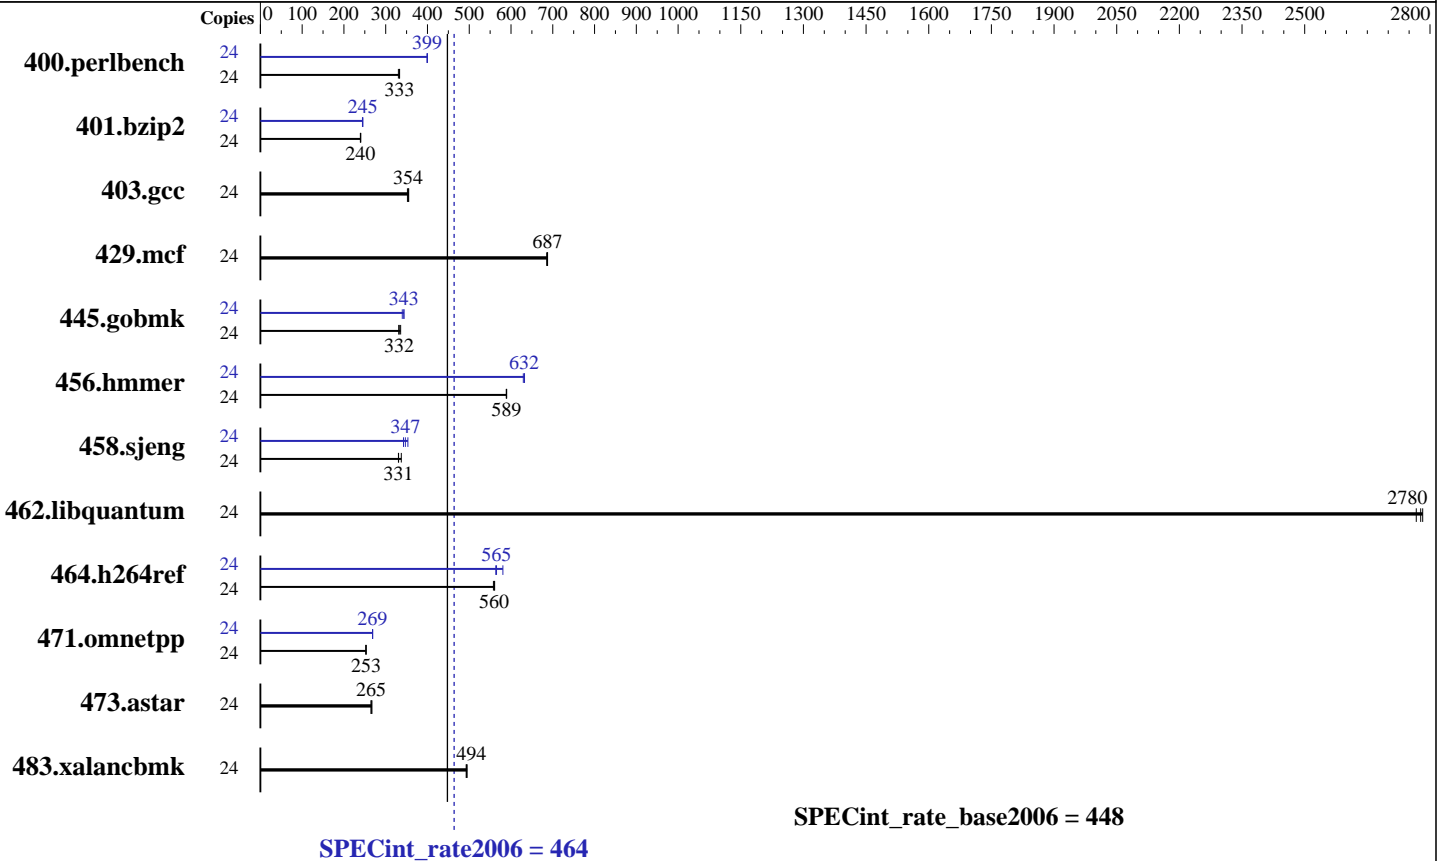

### Hardware

CPU Name: Intel Xeon E5-2640  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 464

Huawei CH222 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 448

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Aug-2014  
Hardware Availability: Mar-2012  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b><u>705</u></b>	<b><u>333</u></b>	710	330	704	333	24	587	399	586	400	<b><u>587</u></b>	<b><u>399</u></b>
401.bzip2	24	964	240	<b><u>965</u></b>	<b><u>240</u></b>	968	239	24	948	244	945	245	<b><u>946</u></b>	<b><u>245</u></b>
403.gcc	24	549	352	544	355	<b><u>545</u></b>	<b><u>354</u></b>	24	549	352	544	355	<b><u>545</u></b>	<b><u>354</u></b>
429.mcf	24	<b><u>318</u></b>	<b><u>687</u></b>	318	688	319	685	24	<b><u>318</u></b>	<b><u>687</u></b>	318	688	319	685
445.gobmk	24	760	331	750	336	<b><u>757</u></b>	<b><u>332</u></b>	24	732	344	<b><u>733</u></b>	<b><u>343</u></b>	741	340
456.hammer	24	<b><u>380</u></b>	<b><u>589</u></b>	380	590	380	589	24	<b><u>354</u></b>	<b><u>632</u></b>	356	629	354	632
458.sjeng	24	<b><u>878</u></b>	<b><u>331</u></b>	861	337	879	330	24	<b><u>837</u></b>	<b><u>347</u></b>	822	353	848	343
462.libquantum	24	180	2770	<b><u>179</u></b>	<b><u>2780</u></b>	179	2780	24	180	2770	<b><u>179</u></b>	<b><u>2780</u></b>	179	2780
464.h264ref	24	952	558	947	561	<b><u>948</u></b>	<b><u>560</u></b>	24	915	581	942	564	<b><u>940</u></b>	<b><u>565</u></b>
471.omnetpp	24	593	253	594	253	<b><u>593</u></b>	<b><u>253</u></b>	24	558	269	559	268	<b><u>558</u></b>	<b><u>269</u></b>
473.astar	24	636	265	<b><u>635</u></b>	<b><u>265</u></b>	631	267	24	636	265	<b><u>635</u></b>	<b><u>265</u></b>	631	267
483.xalancbmk	24	336	493	<b><u>335</u></b>	<b><u>494</u></b>	335	495	24	336	493	<b><u>335</u></b>	<b><u>494</u></b>	335	495

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec14/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191  
running on speccputest Wed Aug 27 03:45:44 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2640 0 @ 2.50GHz  
2 "physical id"s (chips)  
24 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 464

Huawei CH222 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 448

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Mar-2012

Software Availability: Nov-2013

## Platform Notes (Continued)

```

caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
  cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      264478184 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux speccputest 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 27 03:24

```

SPEC is set to: /spec14
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  451G   29G  399G   7% /

```

```

Additional information from dmidecode:
BIOS Insyde Corp. RMIBV379 03/19/2014
Memory:
16x Hynix HMT42GR7MFR4C-PB 16 GB 1333 MHz 2 rank
8x NO DIMM NO DIMM

```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 464

Huawei CH222 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 448

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Aug-2014  
Hardware Availability: Mar-2012  
Software Availability: Nov-2013

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 464

Huawei CH222 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 448

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Mar-2012

Software Availability: Nov-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 464

Huawei CH222 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 448

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Mar-2012

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Oct 17 18:23:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 October 2014.