



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

**SPECint\_rate2006 = 640**

**SPECint\_rate\_base2006 = 616**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

**Test date:** Aug-2014

**Hardware Availability:** Mar-2014

**Software Availability:** May-2014

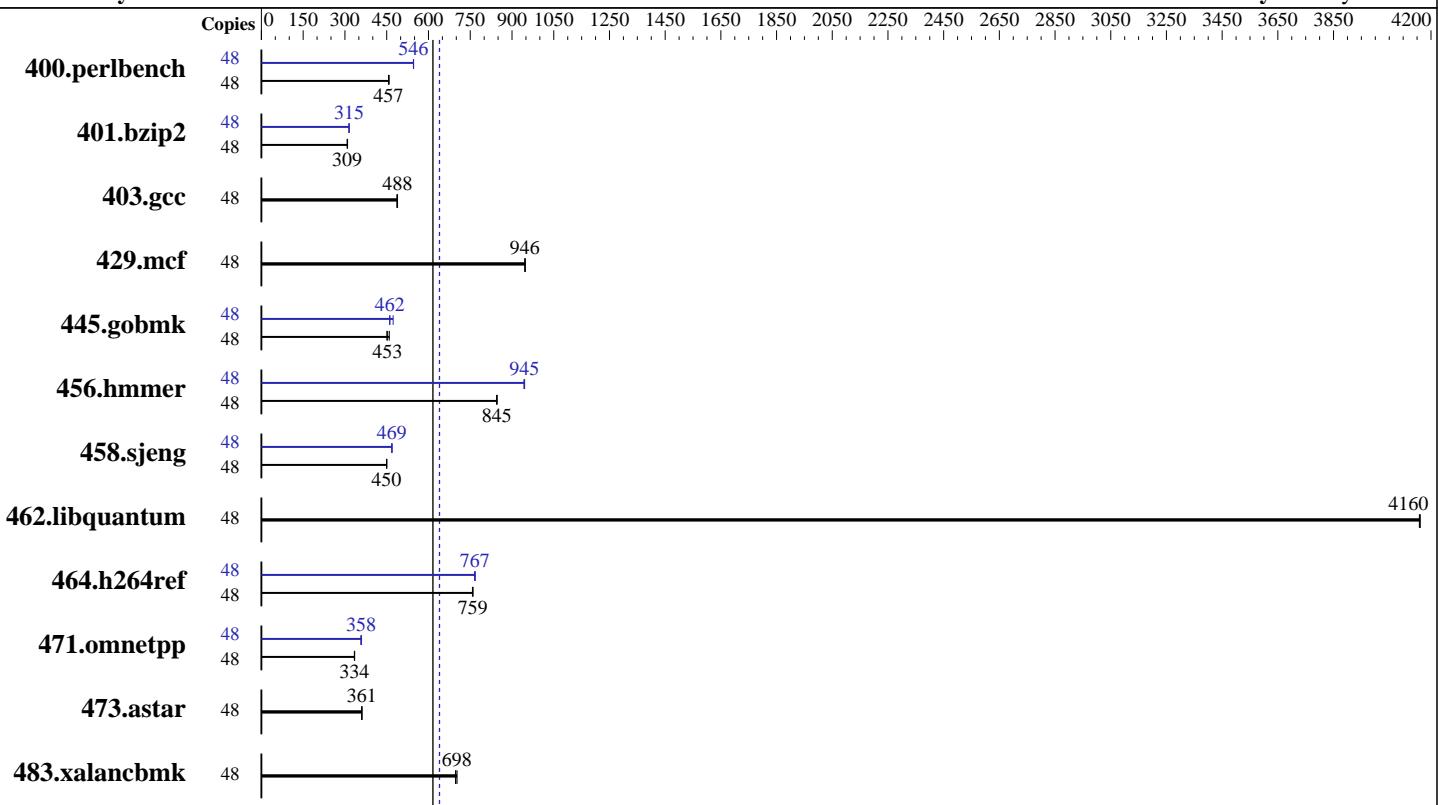

**SPECint\_rate\_base2006 = 616**

**SPECint\_rate2006 = 640**

## Hardware

CPU Name:	Intel Xeon E7-4809 v2
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (64 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)
Disk Subsystem:	1 x 400 GB SAS SSD SSD
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R920 (Intel Xeon E7-4809  
v2, 1.90 GHz)

**SPECint\_rate2006 = 640**

**SPECint\_rate\_base2006 = 616**

CPU2006 license: 55

Test date: Aug-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: May-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	1027	457	<b>1026</b>	<b>457</b>	1022	459	48	859	546	<b>859</b>	<b>546</b>	858	547
401.bzip2	48	1497	309	1503	308	<b>1501</b>	<b>309</b>	48	<b>1470</b>	<b>315</b>	1472	315	1470	315
403.gcc	48	<b>791</b>	<b>488</b>	790	489	794	487	48	<b>791</b>	<b>488</b>	790	489	794	487
429.mcf	48	462	948	463	946	<b>463</b>	<b>946</b>	48	462	948	463	946	<b>463</b>	<b>946</b>
445.gobmk	48	1118	450	<b>1111</b>	<b>453</b>	1096	459	48	1093	461	1064	473	<b>1091</b>	<b>462</b>
456.hammer	48	529	847	<b>530</b>	<b>845</b>	530	845	48	474	945	<b>474</b>	<b>945</b>	475	943
458.sjeng	48	1293	449	<b>1291</b>	<b>450</b>	1289	451	48	1238	469	<b>1239</b>	<b>469</b>	1240	468
462.libquantum	48	<b>239</b>	<b>4160</b>	239	4160	239	4160	48	<b>239</b>	<b>4160</b>	239	4160	239	4160
464.h264ref	48	<b>1400</b>	<b>759</b>	1398	760	1402	758	48	<b>1385</b>	<b>767</b>	1384	768	1387	766
471.omnetpp	48	<b>898</b>	<b>334</b>	898	334	895	335	48	<b>838</b>	<b>358</b>	839	358	834	360
473.astar	48	935	360	<b>934</b>	<b>361</b>	933	361	48	935	360	<b>934</b>	<b>361</b>	933	361
483.xalancbmk	48	475	697	471	703	<b>474</b>	<b>698</b>	48	475	697	471	703	<b>474</b>	<b>698</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Virtualization Technology disabled

Execute Disable disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

C1E set to disabled

C States set to disabled

Memory Patrol Scrub set to disabled

Sysinfo program

/root/Desktop/Performance/ic14.0\_Oct17\_2013/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on slesperf3 Sun Aug 31 17:58:16 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

**SPECint\_rate2006 = 640**

**SPECint\_rate\_base2006 = 616**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Aug-2014

**Hardware Availability:** Mar-2014

**Software Availability:** May-2014

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-4809 v2 @ 1.90GHz
        4 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
```

```
    cpu cores : 6
    siblings   : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
    physical 2: cores 0 1 2 3 4 5
    physical 3: cores 0 1 2 3 4 5
cache size : 12288 KB
```

```
From /proc/meminfo
MemTotal:      1058789108 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux slesperf3 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 30 07:32 last=S
```

```
SPEC is set to: /root/Desktop/Performance/icl4.0_Oct17_2013
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  365G  247G  117G  68% /
```

```
Additional information from dmidecode:
```

```
BIOS Dell Inc. 1.2.2 05/05/2014
Memory:
64x 00CE00B300CE M393B2G70BH0-YK0 16 GB 1066 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/Desktop/Performance/icl4.0_Oct17_2013/lib32:/root/Desktop/Performance/icl4.0_Oct17_2013/lib64:/root/Desktop/Performance/icl4.0_Oct17_2013/sh"
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R920 (Intel Xeon E7-4809  
v2, 1.90 GHz)

**SPECint\_rate2006 = 640**

**SPECint\_rate\_base2006 = 616**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Aug-2014

**Hardware Availability:** Mar-2014

**Software Availability:** May-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R920 (Intel Xeon E7-4809  
v2, 1.90 GHz)

**SPECint\_rate2006 = 640**

**SPECint\_rate\_base2006 = 616**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Aug-2014

**Hardware Availability:** Mar-2014

**Software Availability:** May-2014

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4\_2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4\_2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R920 (Intel Xeon E7-4809  
v2, 1.90 GHz)

**SPECint\_rate2006 = 640**

**SPECint\_rate\_base2006 = 616**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Aug-2014

**Hardware Availability:** Mar-2014

**Software Availability:** May-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 8 19:41:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 October 2014.