



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 112

Huawei RH2288 V3 (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Jun-2014

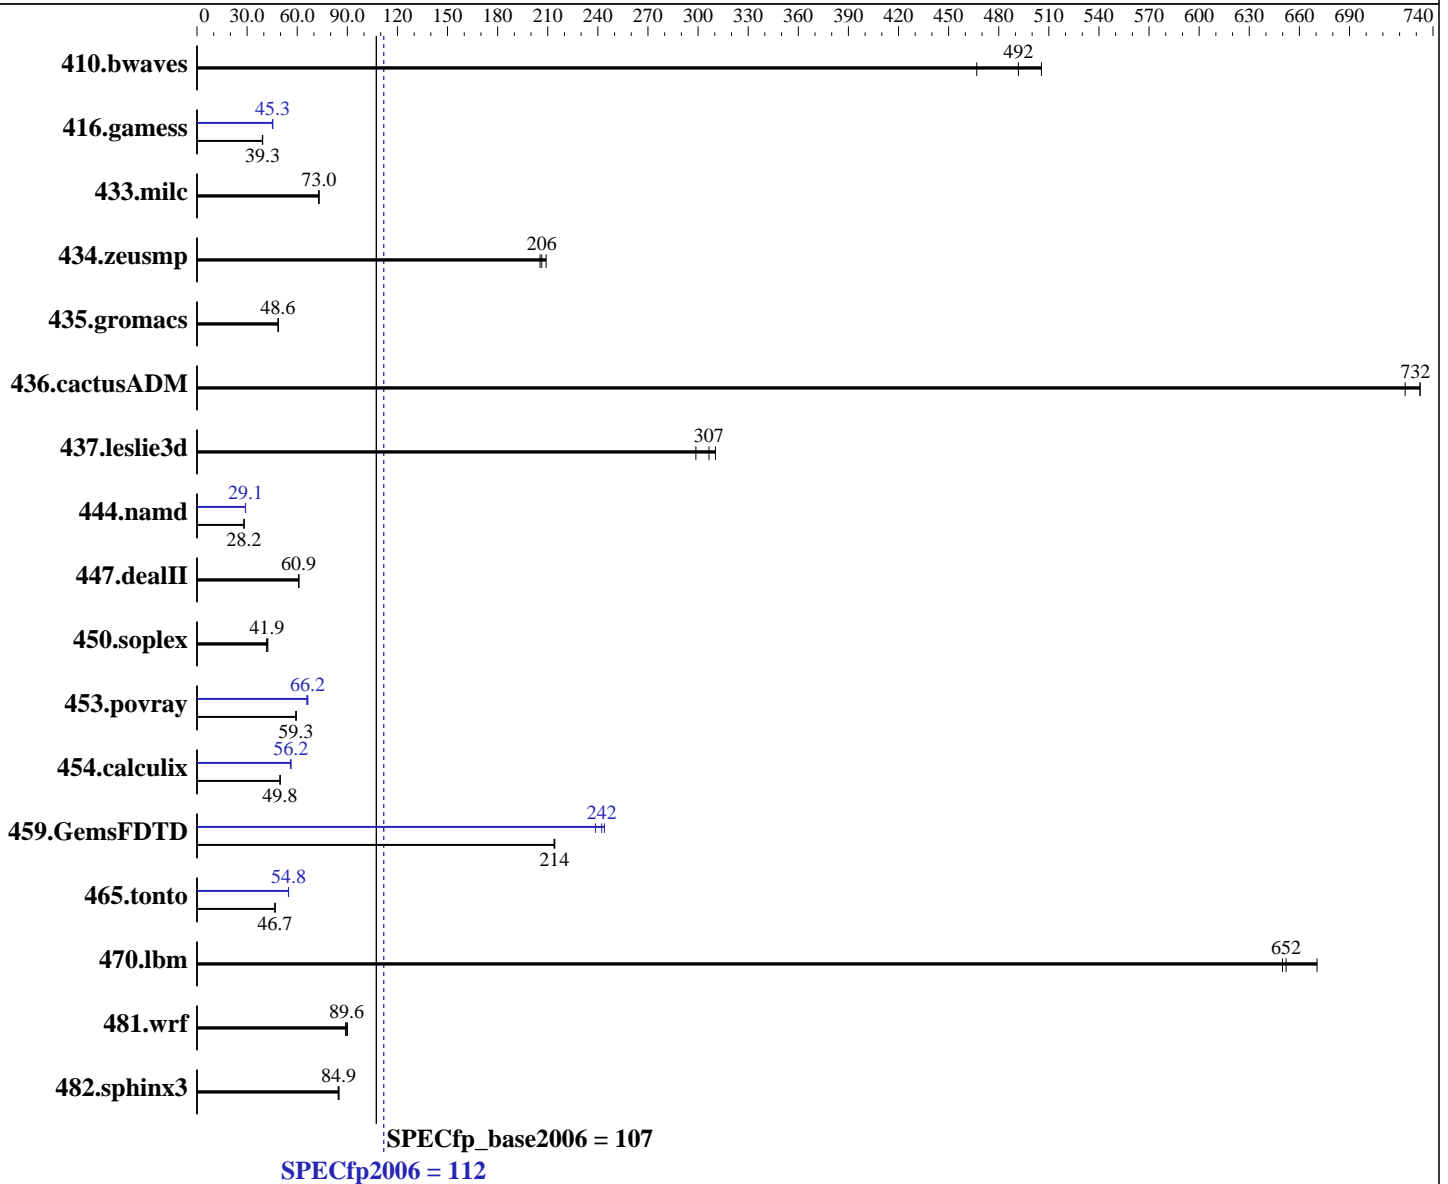

Hardware

CPU Name: Intel Xeon E5-2667 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **112**

Huawei RH2288 V3 (Intel Xeon E5-2667 v3)

SPECfp_base2006 = **107**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Jun-2014

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	26.9	506	29.1	467	<u>27.6</u>	<u>492</u>	26.9	506	29.1	467	<u>27.6</u>	<u>492</u>
416.gamess	<u>498</u>	<u>39.3</u>	498	39.3	500	39.1	434	45.1	432	45.4	<u>432</u>	<u>45.3</u>
433.milc	126	73.1	<u>126</u>	<u>73.0</u>	126	72.9	126	73.1	<u>126</u>	<u>73.0</u>	126	72.9
434.zeusmp	44.3	205	43.5	209	<u>44.1</u>	<u>206</u>	44.3	205	43.5	209	<u>44.1</u>	<u>206</u>
435.gromacs	147	48.7	147	48.6	<u>147</u>	<u>48.6</u>	147	48.7	147	48.6	<u>147</u>	<u>48.6</u>
436.cactusADM	<u>16.3</u>	<u>732</u>	16.3	732	16.5	723	<u>16.3</u>	<u>732</u>	16.3	732	16.5	723
437.leslie3d	<u>30.7</u>	<u>307</u>	31.5	299	30.3	310	<u>30.7</u>	<u>307</u>	31.5	299	30.3	310
444.namd	285	28.1	285	28.2	<u>285</u>	<u>28.2</u>	<u>276</u>	<u>29.1</u>	276	29.0	276	29.1
447.dealII	<u>188</u>	<u>60.9</u>	188	61.0	188	60.9	<u>188</u>	<u>60.9</u>	188	61.0	188	60.9
450.soplex	<u>199</u>	<u>41.9</u>	197	42.4	200	41.7	<u>199</u>	<u>41.9</u>	197	42.4	200	41.7
453.povray	<u>89.6</u>	<u>59.3</u>	89.5	59.5	90.0	59.1	<u>80.4</u>	<u>66.2</u>	80.9	65.8	80.2	66.4
454.calculix	166	49.7	166	49.8	<u>166</u>	<u>49.8</u>	<u>147</u>	<u>56.2</u>	148	55.9	147	56.3
459.GemsFDTD	<u>49.6</u>	<u>214</u>	49.6	214	49.5	214	43.5	244	44.5	239	<u>43.8</u>	<u>242</u>
465.tonto	210	46.8	<u>211</u>	<u>46.7</u>	211	46.6	180	54.7	179	54.8	<u>180</u>	<u>54.8</u>
470.lbm	20.5	671	<u>21.1</u>	<u>652</u>	21.1	650	20.5	671	<u>21.1</u>	<u>652</u>	21.1	650
481.wrf	124	90.1	<u>125</u>	<u>89.6</u>	126	88.9	124	90.1	<u>125</u>	<u>89.6</u>	126	88.9
482.sphinx3	<u>230</u>	<u>84.9</u>	231	84.5	229	85.0	<u>230</u>	<u>84.9</u>	231	84.5	229	85.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Custom
 Set Snoop Mode to HS
 Set Hyper-Threading to Disabled
 Baseboard Management Controller used to adjust the fan speed to 100%
 Sysinfo program /spec/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on localhost.localdomain Sun May 10 17:49:35 2015

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei RH2288 V3 (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Jun-2014

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2667 v3 @ 3.20GHz
    2 "physical id"s (chips)
    16 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 8
    siblings  : 8
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
  cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      263721488 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 10 02:59

```

SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  259G  137G  109G  56% /

```

Additional information from dmidecode:

```

BIOS Insyde Corp. 1.16 09/02/2014
Memory:
8x NO DIMM NO DIMM      3 rank
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 1 rank
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei RH2288 V3 (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Jun-2014

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "16"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei RH2288 V3 (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2015
Hardware Availability: Sep-2014
Software Availability: Jun-2014

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei RH2288 V3 (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 112

Huawei RH2288 V3 (Intel Xeon E5-2667 v3)

SPECfp_base2006 = 107

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: Sep-2014

Software Availability: Jun-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 22 12:19:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 October 2014.