



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]2006 = 85.9

Huawei CH242 V3 (Intel Xeon E7-4830 v2)

SPECfp_base2006 = 82.3

CPU2006 license: 3175


Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Sep-2013

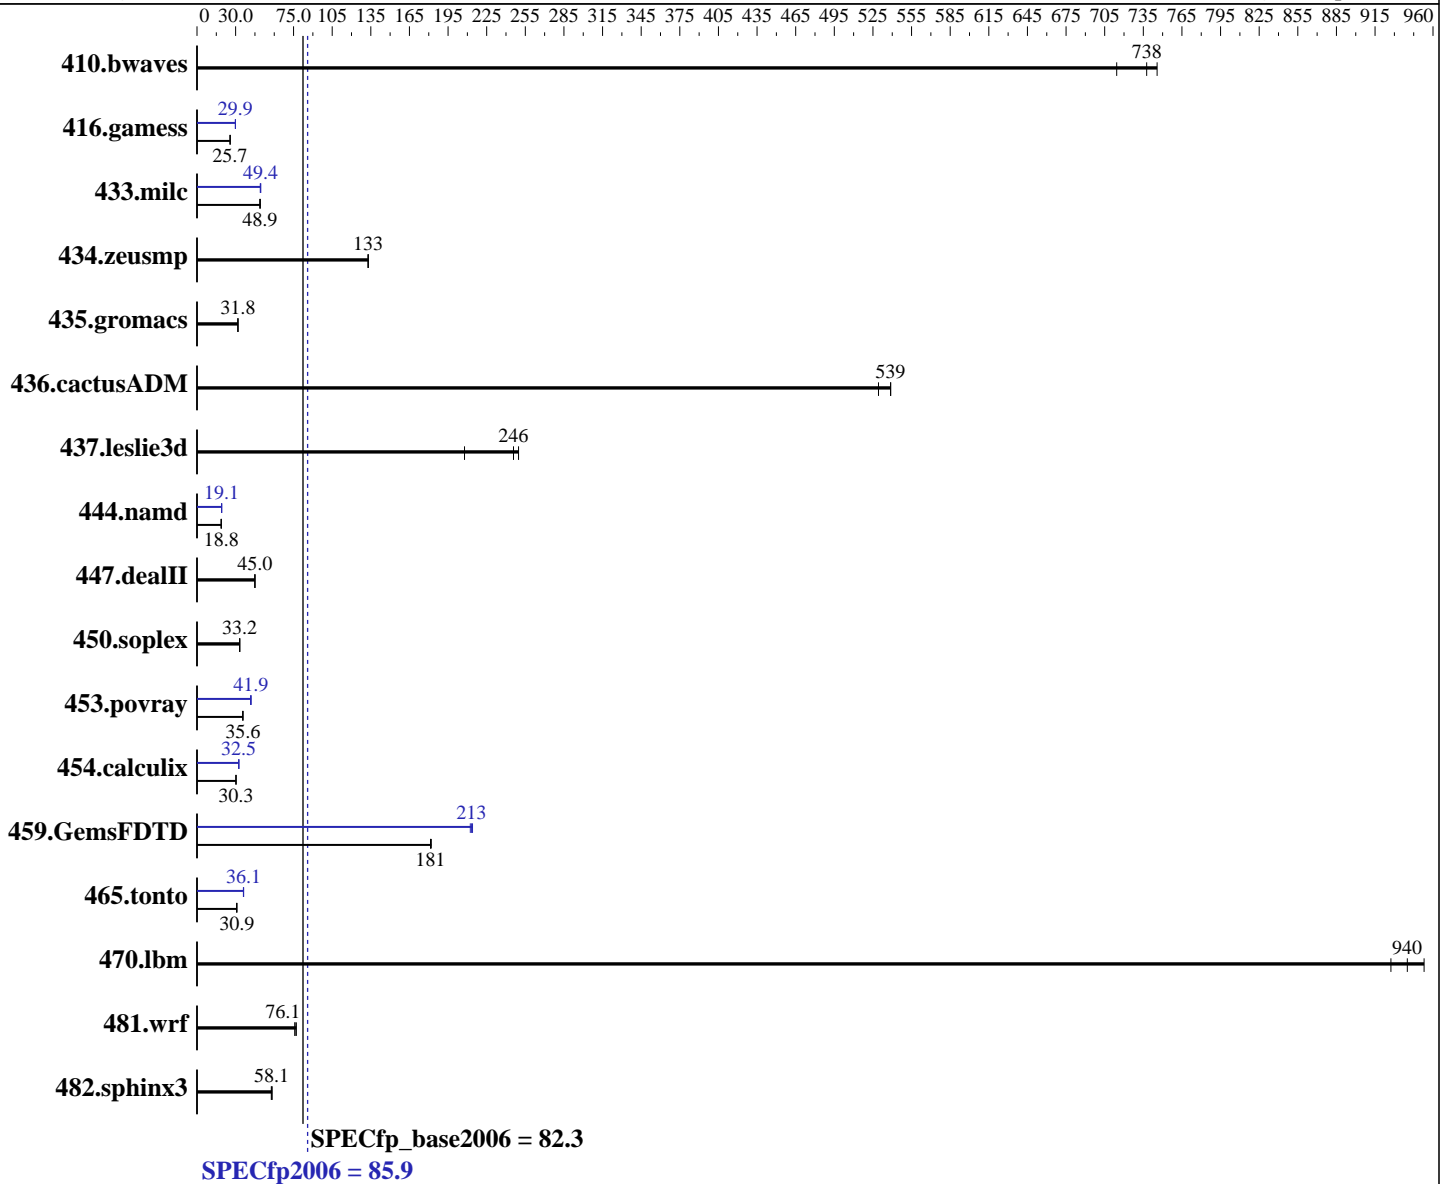

Hardware

CPU Name: Intel Xeon E7-4830 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **85.9**

Huawei CH242 V3 (Intel Xeon E7-4830 v2)

SPECfp_base2006 = **82.3**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	18.2	746	19.0	714	18.4	738	18.2	746	19.0	714	18.4	738
416.gamess	761	25.7	761	25.7	761	25.7	656	29.9	656	29.8	656	29.9
433.milc	187	49.2	188	48.8	188	48.9	186	49.4	186	49.5	187	49.1
434.zeusmp	68.4	133	68.4	133	68.4	133	68.4	133	68.4	133	68.4	133
435.gromacs	224	31.8	225	31.8	225	31.8	224	31.8	225	31.8	225	31.8
436.cactusADM	22.6	529	22.2	539	22.2	539	22.6	529	22.2	539	22.2	539
437.leslie3d	45.2	208	38.2	246	37.6	250	45.2	208	38.2	246	37.6	250
444.namd	426	18.8	426	18.8	426	18.8	419	19.1	419	19.1	419	19.1
447.dealII	254	45.0	255	44.9	254	45.0	254	45.0	255	44.9	254	45.0
450.soplex	251	33.2	251	33.2	252	33.1	251	33.2	251	33.2	252	33.1
453.povray	149	35.8	150	35.5	149	35.6	127	41.9	127	42.0	128	41.6
454.calculix	272	30.3	272	30.3	273	30.3	254	32.5	254	32.5	254	32.5
459.GemsFDTD	58.3	182	58.5	181	58.5	181	49.6	214	50.0	212	49.8	213
465.tonto	318	30.9	318	30.9	320	30.8	272	36.1	271	36.3	273	36.0
470.lbm	14.6	940	14.4	953	14.8	927	14.6	940	14.4	953	14.8	927
481.wrf	147	76.0	147	76.1	145	77.2	147	76.0	147	76.1	145	77.2
482.sphinx3	334	58.3	336	58.1	338	57.7	334	58.3	336	58.1	338	57.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /spec/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Wed Oct 8 17:17:42 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) CPU E7-4830 v2 @ 2.20GHz
 Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 85.9

Huawei CH242 V3 (Intel Xeon E7-4830 v2)

SPECfp_base2006 = 82.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Platform Notes (Continued)

```

4 "physical id"s (chips)
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings  : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 20480 KB

```

From /proc/meminfo

```

MemTotal:      264358028 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 8 09:52

SPEC is set to: /spec

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4     255G  166G   77G  69% /

```

Additional information from dmidecode:

Memory:

32x Micron 36KSF1G72PZ-1G6K1 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "40"

```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 85.9

Huawei CH242 V3 (Intel Xeon E7-4830 v2)

SPECfp_base2006 = 82.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 85.9

Huawei CH242 V3 (Intel Xeon E7-4830 v2)

SPECfp_base2006 = 82.3

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Sep-2013

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 85.9

Huawei CH242 V3 (Intel Xeon E7-4830 v2)

SPECfp_base2006 = 82.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 85.9

Huawei CH242 V3 (Intel Xeon E7-4830 v2)

SPECfp_base2006 = 82.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Nov 6 13:47:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 November 2014.