



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 268

Huawei CH220 V3 (Intel Xeon E5-2603 v3)

SPECint_rate_base2006 = 259

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

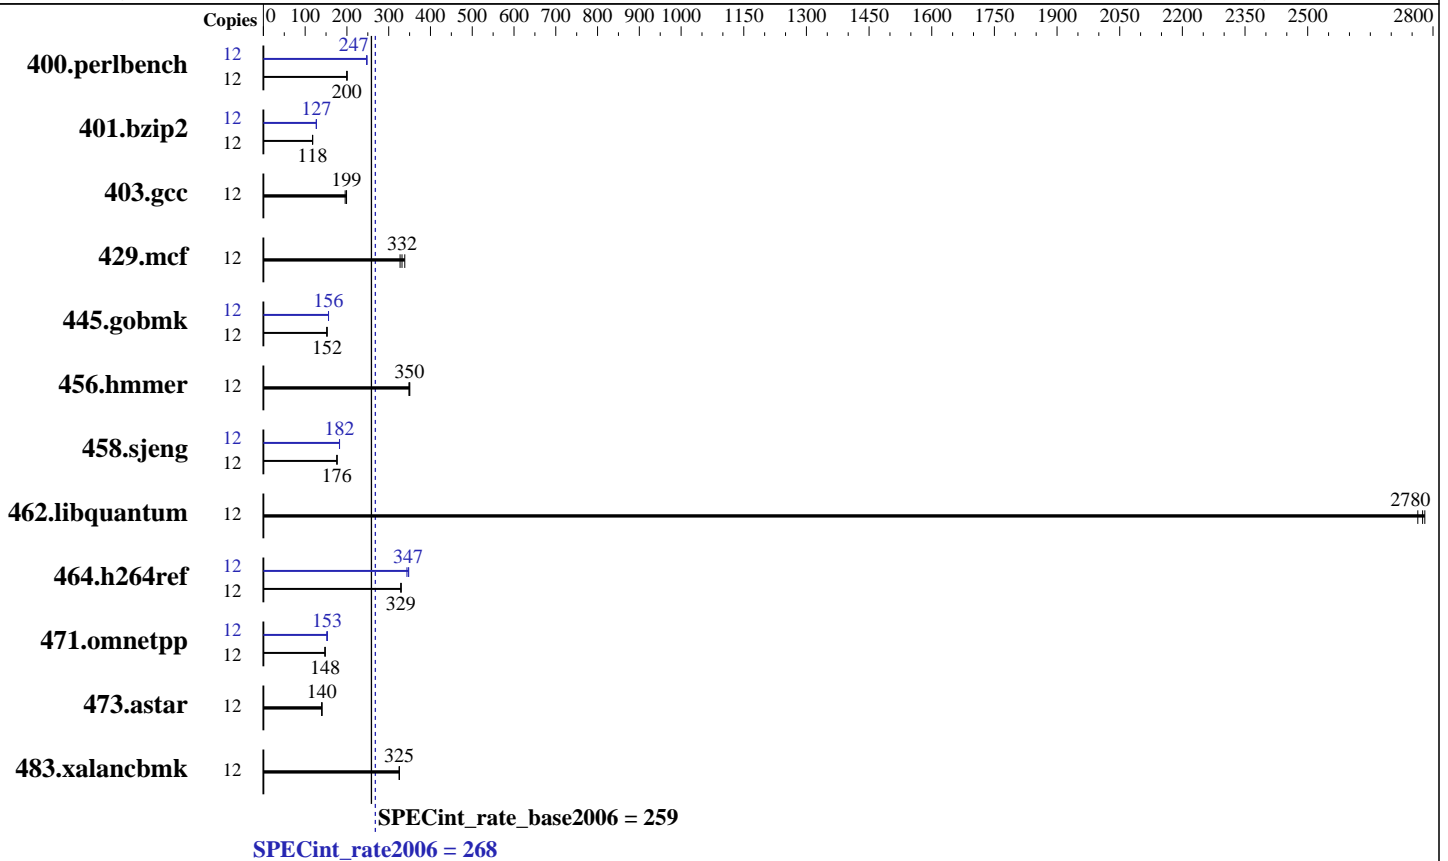

Hardware

CPU Name: Intel Xeon E5-2603 v3
 CPU Characteristics:
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 300 GB SAS, 10000RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 268

Huawei CH220 V3 (Intel Xeon E5-2603 v3)

SPECint_rate_base2006 = 259

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	587	200	585	200	<u>587</u>	<u>200</u>	12	474	247	<u>474</u>	<u>247</u>	473	248
401.bzip2	12	981	118	985	118	<u>982</u>	<u>118</u>	12	<u>913</u>	<u>127</u>	911	127	914	127
403.gcc	12	<u>486</u>	<u>199</u>	493	196	485	199	12	<u>486</u>	<u>199</u>	493	196	485	199
429.mcf	12	334	327	<u>330</u>	<u>332</u>	323	339	12	334	327	<u>330</u>	<u>332</u>	323	339
445.gobmk	12	<u>826</u>	<u>152</u>	826	152	829	152	12	808	156	<u>808</u>	<u>156</u>	807	156
456.hammer	12	<u>320</u>	<u>350</u>	321	348	320	350	12	<u>320</u>	<u>350</u>	321	348	320	350
458.sjeng	12	824	176	824	176	<u>824</u>	<u>176</u>	12	796	182	<u>797</u>	<u>182</u>	797	182
462.libquantum	12	89.4	2780	90.0	2760	<u>89.6</u>	<u>2780</u>	12	89.4	2780	90.0	2760	<u>89.6</u>	<u>2780</u>
464.h264ref	12	<u>806</u>	<u>329</u>	805	330	807	329	12	<u>765</u>	<u>347</u>	773	344	763	348
471.omnetpp	12	<u>508</u>	<u>148</u>	507	148	508	148	12	494	152	<u>491</u>	<u>153</u>	489	153
473.astar	12	<u>602</u>	<u>140</u>	602	140	601	140	12	<u>602</u>	<u>140</u>	602	140	601	140
483.xalancbmk	12	255	325	254	326	<u>255</u>	<u>325</u>	12	255	325	254	326	<u>255</u>	<u>325</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Set Hyper-Threading to Disabled
Set Early Snoop to Disable
Sysinfo program /spec/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost Sun Sep 28 11:32:57 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 v3 @ 1.60GHz
2 "physical id"s (chips)
12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 268

Huawei CH220 V3 (Intel Xeon E5-2603 v3)

SPECint_rate_base2006 = 259

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Platform Notes (Continued)

```

cpu cores : 6
siblings  : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

```

From /proc/meminfo

```

MemTotal:      264278468 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 26 06:07

SPEC is set to: /spec

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2       ext4     266G      33G   219G  14% /

```

Additional information from dmidecode:

BIOS Insyde Corp. 1.18 09/17/2014

Memory:

```

8x Samsung M393A2G40DB0-CPB 16 GB 1600 MHz 1 rank
8x Samsung M393A2G40DB0-CPB 16 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 268

Huawei CH220 V3 (Intel Xeon E5-2603 v3)

SPECint_rate_base2006 = 259

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2014
Software Availability: Nov-2013

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 268

Huawei CH220 V3 (Intel Xeon E5-2603 v3)

SPECint_rate_base2006 = 259

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 268

Huawei CH220 V3 (Intel Xeon E5-2603 v3)

SPECint_rate_base2006 = 259

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Nov 6 13:48:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 November 2014.