



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 32.5

Huawei RH2285 V3 (Intel Xeon E5-2609 v3)

SPECint_base2006 = 31.1

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

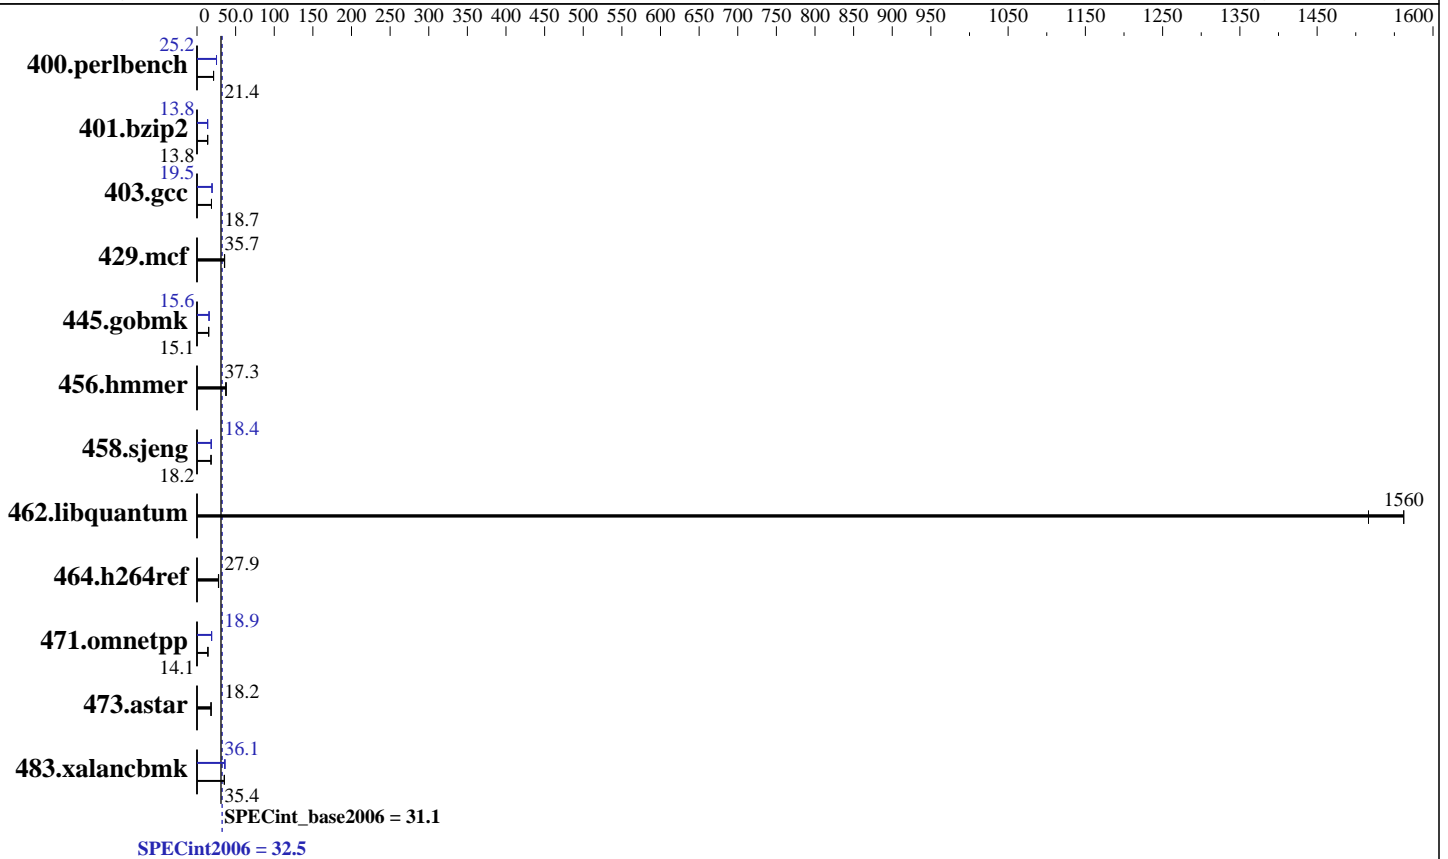

Hardware

CPU Name: Intel Xeon E5-2609 v3
 CPU Characteristics:
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = **32.5**

Huawei RH2285 V3 (Intel Xeon E5-2609 v3)

SPECint_base2006 = **31.1**

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	455	21.5	<u>456</u>	<u>21.4</u>	456	21.4	<u>387</u>	<u>25.2</u>	387	25.3	<u>387</u>	<u>25.2</u>
401.bzip2	700	13.8	<u>700</u>	<u>13.8</u>	700	13.8	<u>701</u>	<u>13.8</u>	702	13.7	701	13.8
403.gcc	429	18.8	<u>429</u>	<u>18.7</u>	430	18.7	<u>413</u>	<u>19.5</u>	414	19.5	<u>413</u>	<u>19.5</u>
429.mcf	255	35.8	<u>256</u>	<u>35.7</u>	257	35.5	<u>255</u>	<u>35.8</u>	<u>256</u>	<u>35.7</u>	257	35.5
445.gobmk	695	15.1	<u>694</u>	<u>15.1</u>	694	15.1	<u>671</u>	<u>15.6</u>	671	15.6	<u>671</u>	<u>15.6</u>
456.hammer	250	37.3	246	37.9	<u>250</u>	<u>37.3</u>	<u>250</u>	<u>37.3</u>	246	37.9	<u>250</u>	<u>37.3</u>
458.sjeng	666	18.2	665	18.2	<u>666</u>	<u>18.2</u>	<u>656</u>	<u>18.4</u>	656	18.4	656	18.4
462.libquantum	13.7	1520	13.3	1560	<u>13.3</u>	<u>1560</u>	13.7	1520	13.3	1560	<u>13.3</u>	<u>1560</u>
464.h264ref	790	28.0	<u>793</u>	<u>27.9</u>	798	27.7	<u>790</u>	<u>28.0</u>	<u>793</u>	<u>27.9</u>	798	27.7
471.omnetpp	442	14.1	445	14.1	<u>443</u>	<u>14.1</u>	<u>330</u>	<u>18.9</u>	331	18.9	<u>331</u>	<u>18.9</u>
473.astar	<u>385</u>	<u>18.2</u>	387	18.1	385	18.3	<u>385</u>	<u>18.2</u>	387	18.1	385	18.3
483.xalancbmk	<u>195</u>	<u>35.4</u>	196	35.3	194	35.5	<u>191</u>	<u>36.1</u>	191	36.0	191	36.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```

BIOS configuration:
Set Power Efficiency Mode to Custom
Set Snoop Mode to HS
Set Hyper-Threading to Disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost Wed Sep 17 19:50:10 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v3 @ 1.90GHz
2 "physical id"s (chips)
12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 32.5

Huawei RH2285 V3 (Intel Xeon E5-2609 v3)

SPECint_base2006 = 31.1

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Platform Notes (Continued)

```

caution.)
  cpu cores : 6
  siblings  : 6
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
  cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      264277804 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 17 10:24

```

SPEC is set to: /spec
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdal       ext4     438G     167G   249G   41% /

```

```

Additional information from dmidecode:
BIOS Insyde Corp. 1.16 09/02/2014
Memory:
8x Micron 36ASF2G72PZ-2G1AW 16 GB 1600 MHz 1 rank
8x Micron 36ASF2G72PZ-2G1AW 16 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "12"

```

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 32.5

Huawei RH2285 V3 (Intel Xeon E5-2609 v3)

SPECint_base2006 = 31.1

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2014
Software Availability: Nov-2013

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 32.5

Huawei RH2285 V3 (Intel Xeon E5-2609 v3)

SPECint_base2006 = 31.1

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
 401.bzip2: `-DSPEC_CPU_LP64`
 403.gcc: `-DSPEC_CPU_LP64`
 429.mcf: `-DSPEC_CPU_LP64`
 456.hmmer: `-DSPEC_CPU_LP64`
 458.sjeng: `-DSPEC_CPU_LP64`
 462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
 464.h264ref: `-DSPEC_CPU_LP64`
 473.astar: `-DSPEC_CPU_LP64`
 483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias`

456.hmmer: `basepeak = yes`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	32.5
Huawei RH2285 V3 (Intel Xeon E5-2609 v3)	SPECint_base2006 =	31.1

CPU2006 license: 3175	Test date: Sep-2014
Test sponsor: Huawei	Hardware Availability: Sep-2014
Tested by: Huawei	Software Availability: Nov-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-ra-region-strategy=block -ansi-alias
 -Wl,-z,muldefs -L/sh -lsmarheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
 -ansi-alias -Wl,-z,muldefs -L/sh -lsmarheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:31:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 November 2014.