



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 788

Huawei CH220 V3 (Intel Xeon E5-2650L v3)

SPECint_rate_base2006 = 761

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

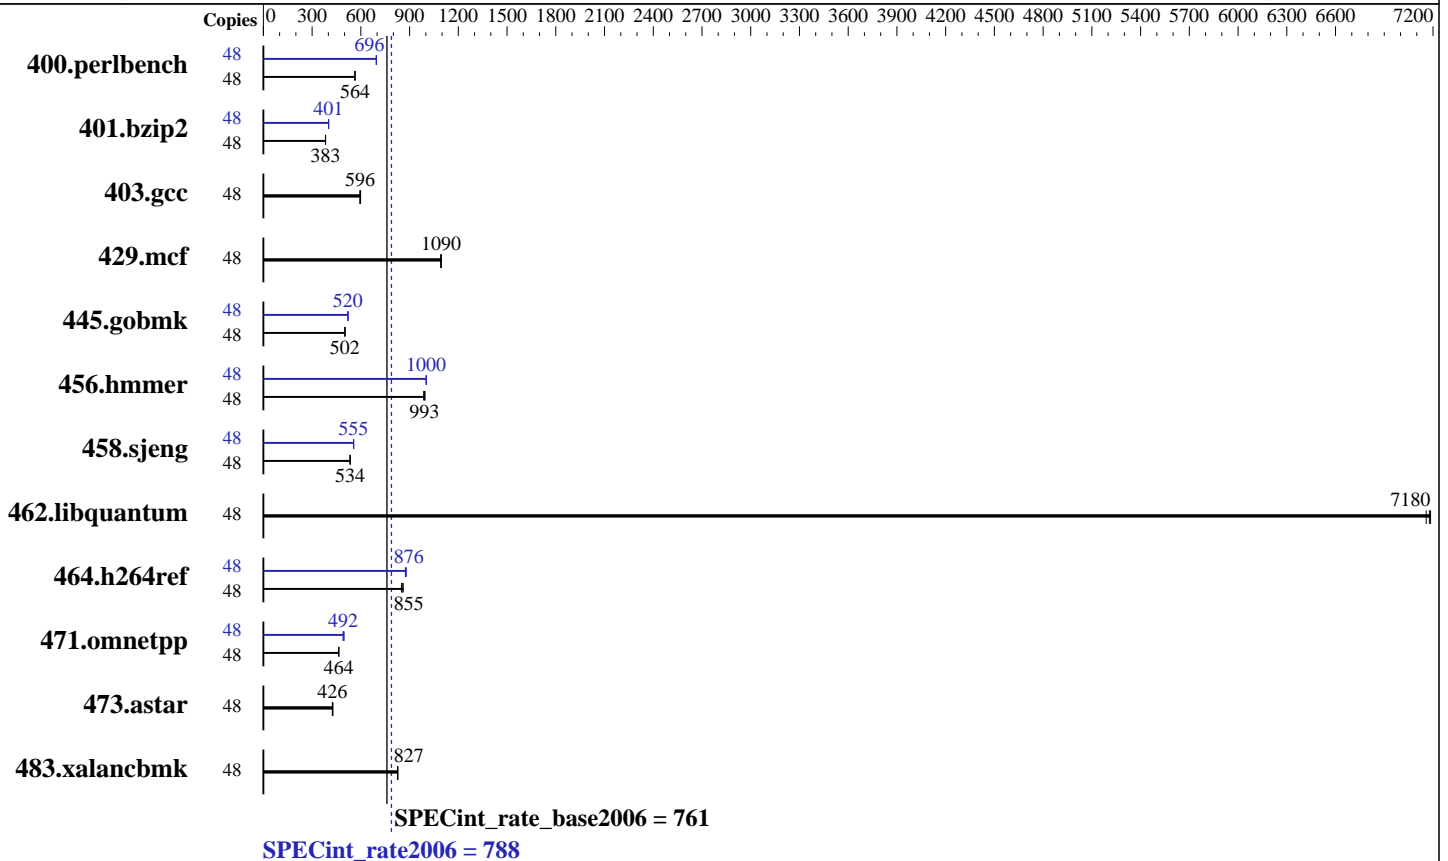

Hardware

CPU Name: Intel Xeon E5-2650L v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 788

Huawei CH220 V3 (Intel Xeon E5-2650L v3)

SPECint_rate_base2006 = 761

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	831	564	833	563	831	564	48	675	695	674	696	674	696
401.bzip2	48	1212	382	1211	383	1209	383	48	1154	401	1152	402	1155	401
403.gcc	48	649	596	650	594	646	598	48	649	596	650	594	646	598
429.mcf	48	400	1090	401	1090	400	1100	48	400	1090	401	1090	400	1100
445.gobmk	48	1002	502	1003	502	1003	502	48	967	520	966	521	968	520
456.hammer	48	450	995	451	993	454	987	48	447	1000	446	1000	447	1000
458.sjeng	48	1086	535	1088	534	1089	533	48	1046	555	1045	556	1046	555
462.libquantum	48	139	7180	138	7190	139	7160	48	139	7180	138	7190	139	7160
464.h264ref	48	1250	850	1234	861	1243	855	48	1215	874	1208	879	1213	876
471.omnetpp	48	648	463	647	464	645	465	48	610	492	611	491	604	497
473.astar	48	794	424	791	426	788	428	48	794	424	791	426	788	428
483.xalancbmk	48	400	827	400	828	401	826	48	400	827	400	828	401	826

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set COD to Enable

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on localhost Fri Oct 17 12:13:23 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2650L v3 @ 1.80GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 788

Huawei CH220 V3 (Intel Xeon E5-2650L v3)

SPECint_rate_base2006 = 761

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Platform Notes (Continued)

```

cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB

```

From /proc/meminfo

```

MemTotal:      264272692 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 17 12:11

SPEC is set to: /spec

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2        ext4      266G      69G  184G  28% /

```

Additional information from dmidecode:

BIOS Insyde Corp. 1.18 09/17/2014

Memory:

```

8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 1 rank
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 788

Huawei CH220 V3 (Intel Xeon E5-2650L v3)

SPECint_rate_base2006 = 761

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 788

Huawei CH220 V3 (Intel Xeon E5-2650L v3)

SPECint_rate_base2006 = 761

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
403.gcc: basepeak = yes
429.mcf: basepeak = yes
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3
456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
462.libquantum: basepeak = yes
464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 788

Huawei CH220 V3 (Intel Xeon E5-2650L v3)

SPECint_rate_base2006 = 761

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:33:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 November 2014.