



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028GR-TR  
(X10DRG-H , Intel Xeon E5-2680 v3)

**SPECint®\_rate2006 = 1060**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Oct-2014

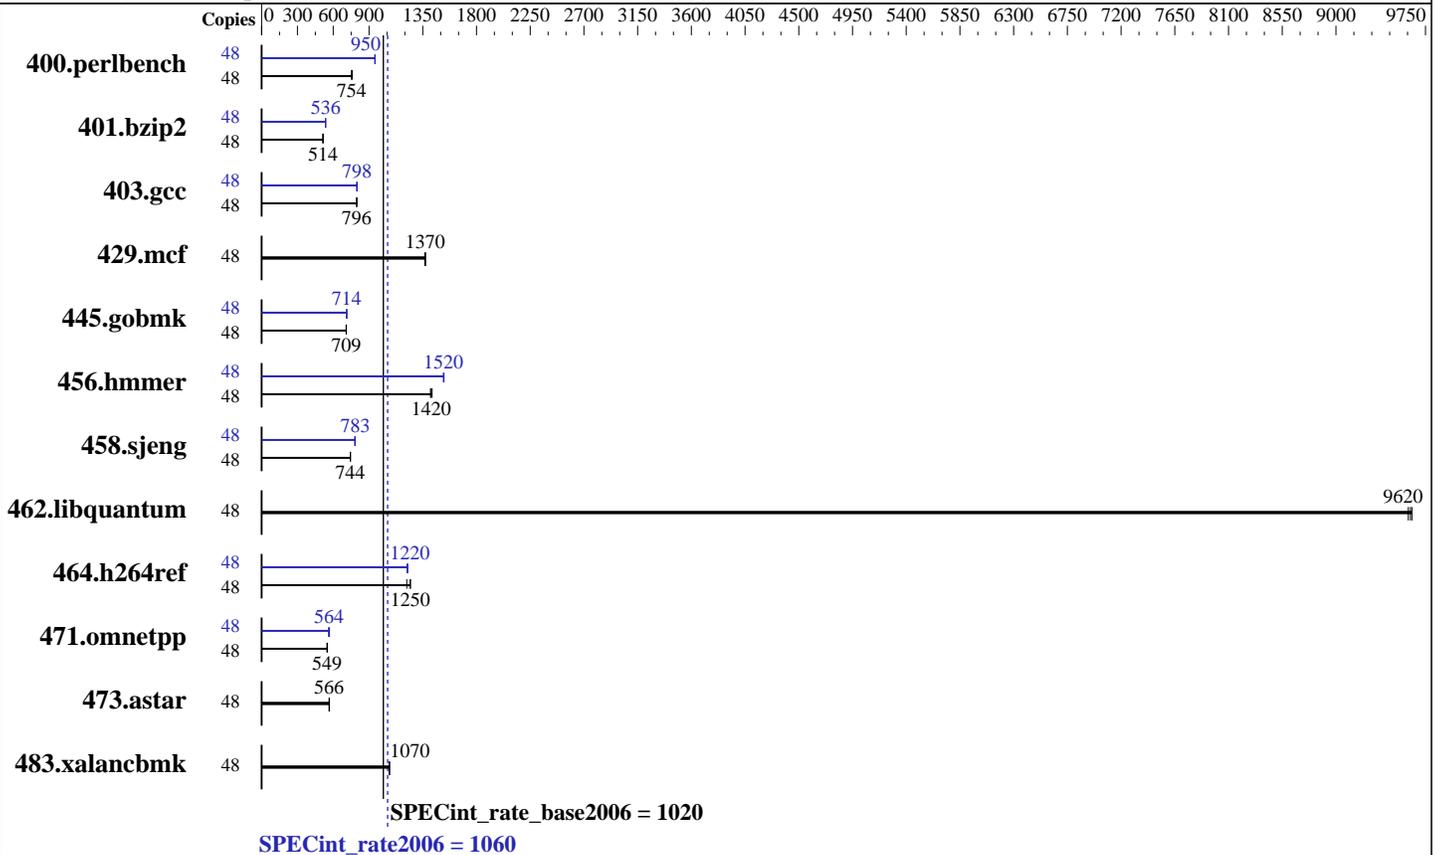

### Hardware

CPU Name: Intel Xeon E5-2680 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 400 GB SATA III, SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028GR-TR  
(X10DRG-H , Intel Xeon E5-2680 v3)

SPECint\_rate2006 = 1060

SPECint\_rate\_base2006 = 1020

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Oct-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	<b>622</b>	<b>754</b>	618	759	623	753	48	493	950	<b>494</b>	<b>950</b>	494	949
401.bzip2	48	901	514	<b>900</b>	<b>514</b>	900	515	48	<b>864</b>	<b>536</b>	865	535	862	537
403.gcc	48	484	799	486	796	<b>485</b>	<b>796</b>	48	484	798	483	800	<b>484</b>	<b>798</b>
429.mcf	48	320	1370	319	1370	<b>319</b>	<b>1370</b>	48	320	1370	319	1370	<b>319</b>	<b>1370</b>
445.gobmk	48	711	709	<b>711</b>	<b>709</b>	709	710	48	<b>706</b>	<b>714</b>	705	714	708	711
456.hammer	48	<b>315</b>	<b>1420</b>	314	1430	317	1410	48	293	1530	<b>294</b>	<b>1520</b>	294	1520
458.sjeng	48	780	744	<b>780</b>	<b>744</b>	782	743	48	741	784	744	781	<b>741</b>	<b>783</b>
462.libquantum	48	104	9610	103	9640	<b>103</b>	<b>9620</b>	48	104	9610	103	9640	<b>103</b>	<b>9620</b>
464.h264ref	48	852	1250	874	1220	<b>853</b>	<b>1250</b>	48	868	1220	871	1220	<b>869</b>	<b>1220</b>
471.omnetpp	48	<b>546</b>	<b>549</b>	547	548	544	551	48	535	561	527	569	<b>532</b>	<b>564</b>
473.astar	48	596	566	<b>595</b>	<b>566</b>	593	568	48	596	566	<b>595</b>	<b>566</b>	593	568
483.xalancbmk	48	<b>309</b>	<b>1070</b>	310	1070	309	1070	48	<b>309</b>	<b>1070</b>	310	1070	309	1070

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Execute Disable Bit = Disable  
Intel Virtualization Technology = Disable  
COD Enable = Enable  
Early Snoop = Disable

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028GR-TR  
(X10DRG-H , Intel Xeon E5-2680 v3)

SPECint\_rate2006 = 1060

SPECint\_rate\_base2006 = 1020

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Oct-2014

### General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

### Base Compiler Invocation

C benchmarks:  
icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:  
icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

### Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

### Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

### Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

### Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028GR-TR  
(X10DRG-H , Intel Xeon E5-2680 v3)

SPECint\_rate2006 = 1060

SPECint\_rate\_base2006 = 1020

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Oct-2014

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028GR-TR  
(X10DRG-H , Intel Xeon E5-2680 v3)

**SPECint\_rate2006 = 1060**

**SPECint\_rate\_base2006 = 1020**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Oct-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:34:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.