



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD450 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp[®]2006 = 105

SPECfp_base2006 = 101

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

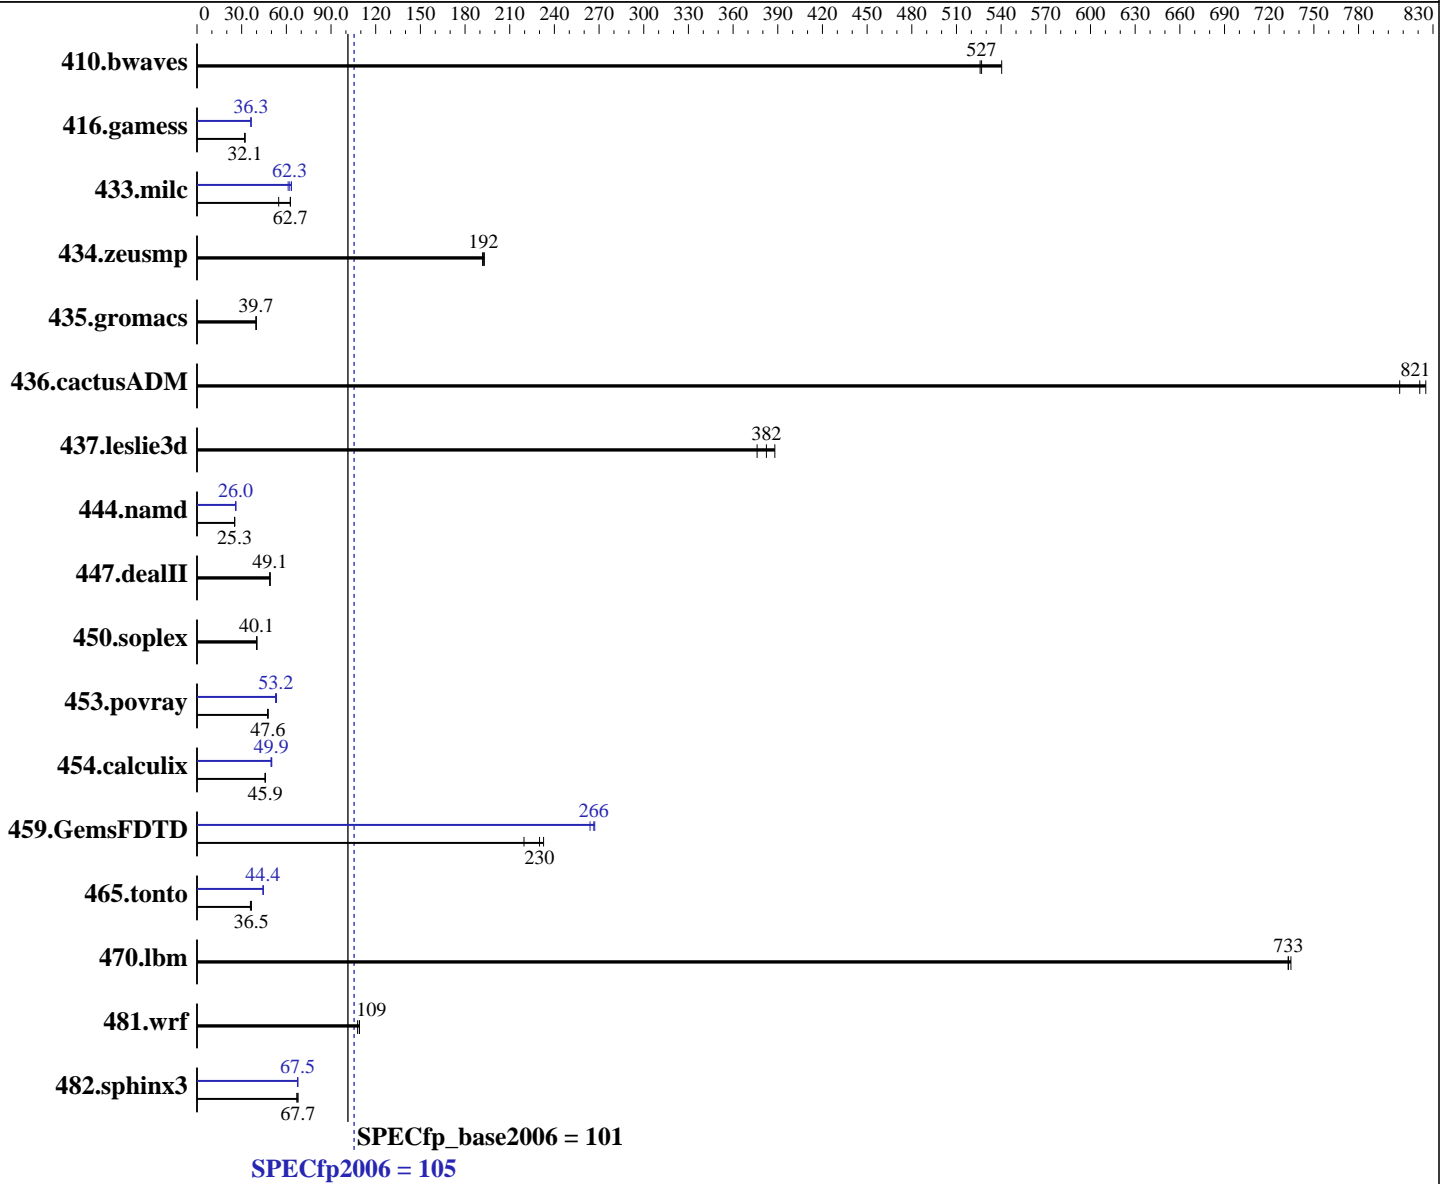

Hardware

CPU Name: Intel Xeon E5-2650 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **105**

Lenovo ThinkServer RD450 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_base2006 = **101**

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>25.8</u>	<u>527</u>	25.1	540	25.8	526	<u>25.8</u>	<u>527</u>	25.1	540	25.8	526
416.gamess	608	32.2	610	32.1	<u>609</u>	<u>32.1</u>	541	36.2	539	36.3	<u>539</u>	<u>36.3</u>
433.milc	146	62.7	167	54.9	<u>147</u>	<u>62.7</u>	150	61.2	145	63.5	<u>147</u>	<u>62.3</u>
434.zeusmp	<u>47.3</u>	<u>192</u>	47.5	192	47.2	193	<u>47.3</u>	<u>192</u>	47.5	192	47.2	193
435.gromacs	<u>180</u>	<u>39.7</u>	179	39.8	180	39.7	<u>180</u>	<u>39.7</u>	179	39.8	180	39.7
436.cactusADM	<u>14.6</u>	<u>821</u>	14.5	825	14.8	808	<u>14.6</u>	<u>821</u>	14.5	825	14.8	808
437.leslie3d	25.0	376	24.2	388	<u>24.6</u>	<u>382</u>	25.0	376	24.2	388	<u>24.6</u>	<u>382</u>
444.namd	317	25.3	<u>317</u>	<u>25.3</u>	318	25.2	308	26.0	308	26.0	<u>308</u>	<u>26.0</u>
447.dealII	<u>233</u>	<u>49.1</u>	233	49.1	234	48.9	<u>233</u>	<u>49.1</u>	233	49.1	234	48.9
450.soplex	<u>208</u>	<u>40.1</u>	208	40.1	207	40.2	<u>208</u>	<u>40.1</u>	208	40.1	207	40.2
453.povray	<u>112</u>	<u>47.6</u>	111	47.8	112	47.4	101	52.8	<u>100</u>	<u>53.2</u>	99.6	53.4
454.calculix	<u>180</u>	<u>45.9</u>	180	46.0	181	45.7	164	50.2	<u>165</u>	<u>49.9</u>	166	49.8
459.GemsFDTD	45.6	233	48.3	220	<u>46.1</u>	<u>230</u>	<u>39.8</u>	<u>266</u>	40.2	264	39.7	267
465.tonto	<u>270</u>	<u>36.5</u>	270	36.5	274	35.9	<u>222</u>	<u>44.4</u>	222	44.4	221	44.5
470.lbm	18.8	733	<u>18.7</u>	<u>733</u>	18.7	735	18.8	733	<u>18.7</u>	<u>733</u>	18.7	735
481.wrf	<u>102</u>	<u>109</u>	104	108	102	109	<u>102</u>	<u>109</u>	104	108	102	109
482.sphinx3	291	67.0	<u>288</u>	<u>67.7</u>	288	67.8	289	67.5	<u>289</u>	<u>67.5</u>	288	67.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Cluster On Die set to Disabled
Early Snoop set to Disabled
Performance Profile set to Custom
ClE Support set to Disabled
Core C3 set to Disabled
Core C6 set to Disabled
Thermal Profile set to High Fan Speed
Memory Power Savings set to Disabled
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 105

Lenovo ThinkServer RD450 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_base2006 = 101

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on RD450 Fri Nov 7 01:42:50 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      263857348 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux RD450 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 7 01:41
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   741G  84G  658G  12% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD450 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp2006 = 105

SPECfp_base2006 = 101

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO VB3TS110 10/05/2014

Memory:

16x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

RD450 support 4 channels and 8 DIMMs per processor, total 8 channels and 16 DIMMs. All 16 DIMM slots installed with 16 GB DIMM for this run.

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

OMP_NUM_THREADS = "20"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD450 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp2006 = 105

SPECfp_base2006 = 101

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD450 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp2006 = 105

SPECfp_base2006 = 101

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD450 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp2006 = 105

SPECfp_base2006 = 101

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RD450-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RD450-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:32:50 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.