



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp®2006 = **110**

Lenovo System x3500 M5  
(Intel Xeon E5-2670 v3, 2.30 GHz)

SPECfp\_base2006 = **105**

CPU2006 license: 9017


Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

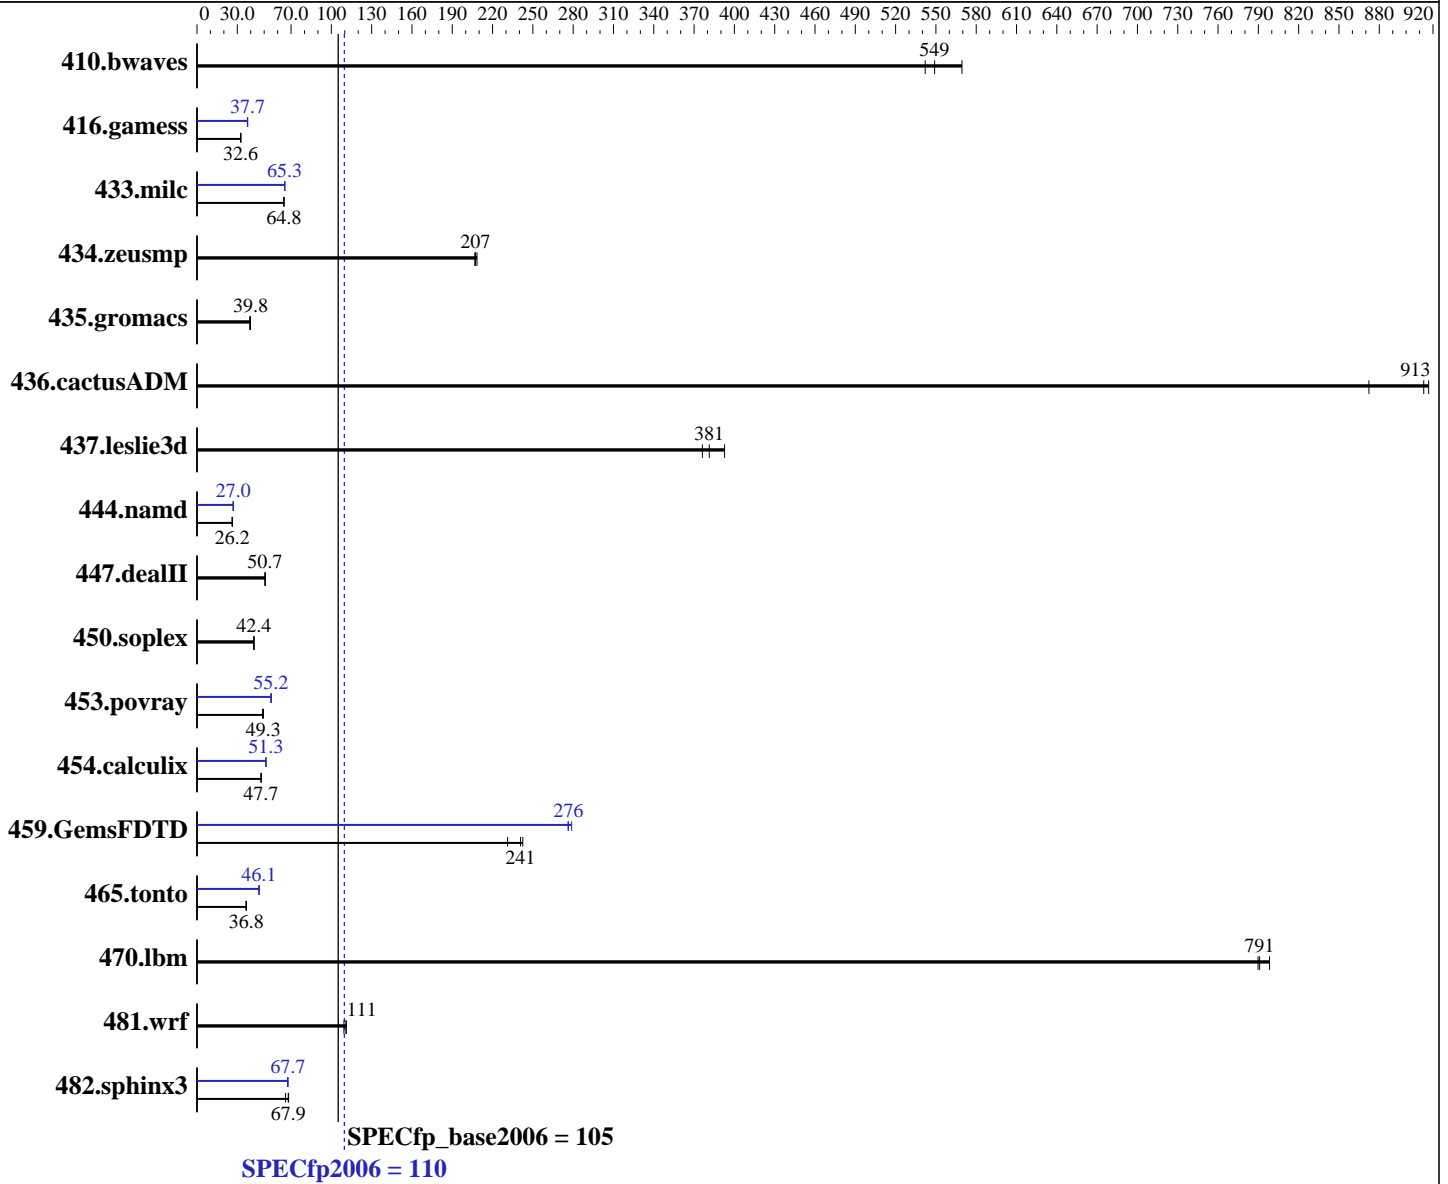

### Hardware

CPU Name: Intel Xeon E5-2670 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = **110**

Lenovo System x3500 M5  
(Intel Xeon E5-2670 v3, 2.30 GHz)

SPECfp\_base2006 = **105**

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 960 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.1	542	23.9	569	<b><u>24.8</u></b>	<b><u>549</u></b>	25.1	542	23.9	569	<b><u>24.8</u></b>	<b><u>549</u></b>
416.gamess	604	32.4	<b><u>601</u></b>	<b><u>32.6</u></b>	599	32.7	522	37.5	<b><u>520</u></b>	<b><u>37.7</u></b>	519	37.7
433.milc	142	64.8	142	64.5	<b><u>142</u></b>	<b><u>64.8</u></b>	<b><u>140</u></b>	<b><u>65.3</u></b>	140	65.4	141	65.2
434.zeusmp	44.0	207	<b><u>43.9</u></b>	<b><u>207</u></b>	43.7	208	44.0	207	<b><u>43.9</u></b>	<b><u>207</u></b>	43.7	208
435.gromacs	<b><u>179</u></b>	<b><u>39.8</u></b>	182	39.2	179	39.8	<b><u>179</u></b>	<b><u>39.8</u></b>	182	39.2	179	39.8
436.cactusADM	<b><u>13.1</u></b>	<b><u>913</u></b>	13.0	917	13.7	872	<b><u>13.1</u></b>	<b><u>913</u></b>	13.0	917	13.7	872
437.leslie3d	<b><u>24.7</u></b>	<b><u>381</u></b>	23.9	393	25.0	376	<b><u>24.7</u></b>	<b><u>381</u></b>	23.9	393	25.0	376
444.namd	305	26.3	<b><u>306</u></b>	<b><u>26.2</u></b>	306	26.2	297	27.0	<b><u>297</u></b>	<b><u>27.0</u></b>	298	27.0
447.dealII	<b><u>226</u></b>	<b><u>50.7</u></b>	226	50.7	226	50.7	<b><u>226</u></b>	<b><u>50.7</u></b>	226	50.7	226	50.7
450.soplex	<b><u>197</u></b>	<b><u>42.4</u></b>	196	42.5	197	42.3	<b><u>197</u></b>	<b><u>42.4</u></b>	196	42.5	197	42.3
453.povray	108	49.4	109	48.7	<b><u>108</u></b>	<b><u>49.3</u></b>	96.2	55.3	<b><u>96.4</u></b>	<b><u>55.2</u></b>	96.8	55.0
454.calculix	<b><u>173</u></b>	<b><u>47.7</u></b>	173	47.8	173	47.7	161	51.3	161	51.3	<b><u>161</u></b>	<b><u>51.3</u></b>
459.GemsFDTD	43.8	242	45.9	231	<b><u>44.1</u></b>	<b><u>241</u></b>	38.0	279	<b><u>38.4</u></b>	<b><u>276</u></b>	38.4	276
465.tonto	270	36.4	<b><u>267</u></b>	<b><u>36.8</u></b>	267	36.9	212	46.3	213	46.1	<b><u>213</u></b>	<b><u>46.1</u></b>
470.lbm	17.2	798	<b><u>17.4</u></b>	<b><u>791</u></b>	17.4	790	17.2	798	<b><u>17.4</u></b>	<b><u>791</u></b>	17.4	790
481.wrf	101	111	<b><u>101</u></b>	<b><u>111</u></b>	102	109	101	111	<b><u>101</u></b>	<b><u>111</u></b>	102	109
482.sphinx3	<b><u>287</u></b>	<b><u>67.9</u></b>	296	65.9	286	68.2	289	67.4	<b><u>288</u></b>	<b><u>67.7</u></b>	288	67.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:  
Operating Mode set to "Efficiency-Favor Performance"  
Sysinfo program /home/SPEC/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on x3500M5 Wed Jun 17 10:27:23 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = 110

Lenovo System x3500 M5  
(Intel Xeon E5-2670 v3, 2.30 GHz)

SPECfp\_base2006 = 105

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

### Platform Notes (Continued)

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) CPU E5-2670 v3 @ 2.30GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 12
  siblings     : 24
 physical 0:   cores 0 1 2 3 4 5 8 9 10 11 12 13
 physical 1:   cores 0 1 2 3 4 5 8 9 10 11 12 13
 cache size    : 30720 KB

```

From /proc/meminfo

```

MemTotal:      263453972 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

uname -a:

```

Linux x3500M5 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
x86_64 x86_64 GNU/Linux

```

SPEC is set to: /home/SPEC

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs      927G  140G  787G  16% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TAE105J-1.10]- 04/20/2015

Memory:

```

16x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz
8x NO DIMM Unknown

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECfp2006 = 110**

Lenovo System x3500 M5  
(Intel Xeon E5-2670 v3, 2.30 GHz)

**SPECfp\_base2006 = 105**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jan-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/SPEC/libs/32:/home/SPEC/libs/64:/home/SPEC/sh"

OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 110

Lenovo System x3500 M5  
(Intel Xeon E5-2670 v3, 2.30 GHz)

SPECfp\_base2006 = 105

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 110

Lenovo System x3500 M5  
(Intel Xeon E5-2670 v3, 2.30 GHz)

SPECfp\_base2006 = 105

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp2006 = 110**

Lenovo System x3500 M5  
(Intel Xeon E5-2670 v3, 2.30 GHz)

**SPECfp\_base2006 = 105**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jan-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jul 14 16:21:12 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 July 2015.