



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5029A-iL
(X11SAE , Intel Core i5-6600K)

SPECfp[®]2006 = **93.0**

SPECfp_base2006 = **90.5**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2015

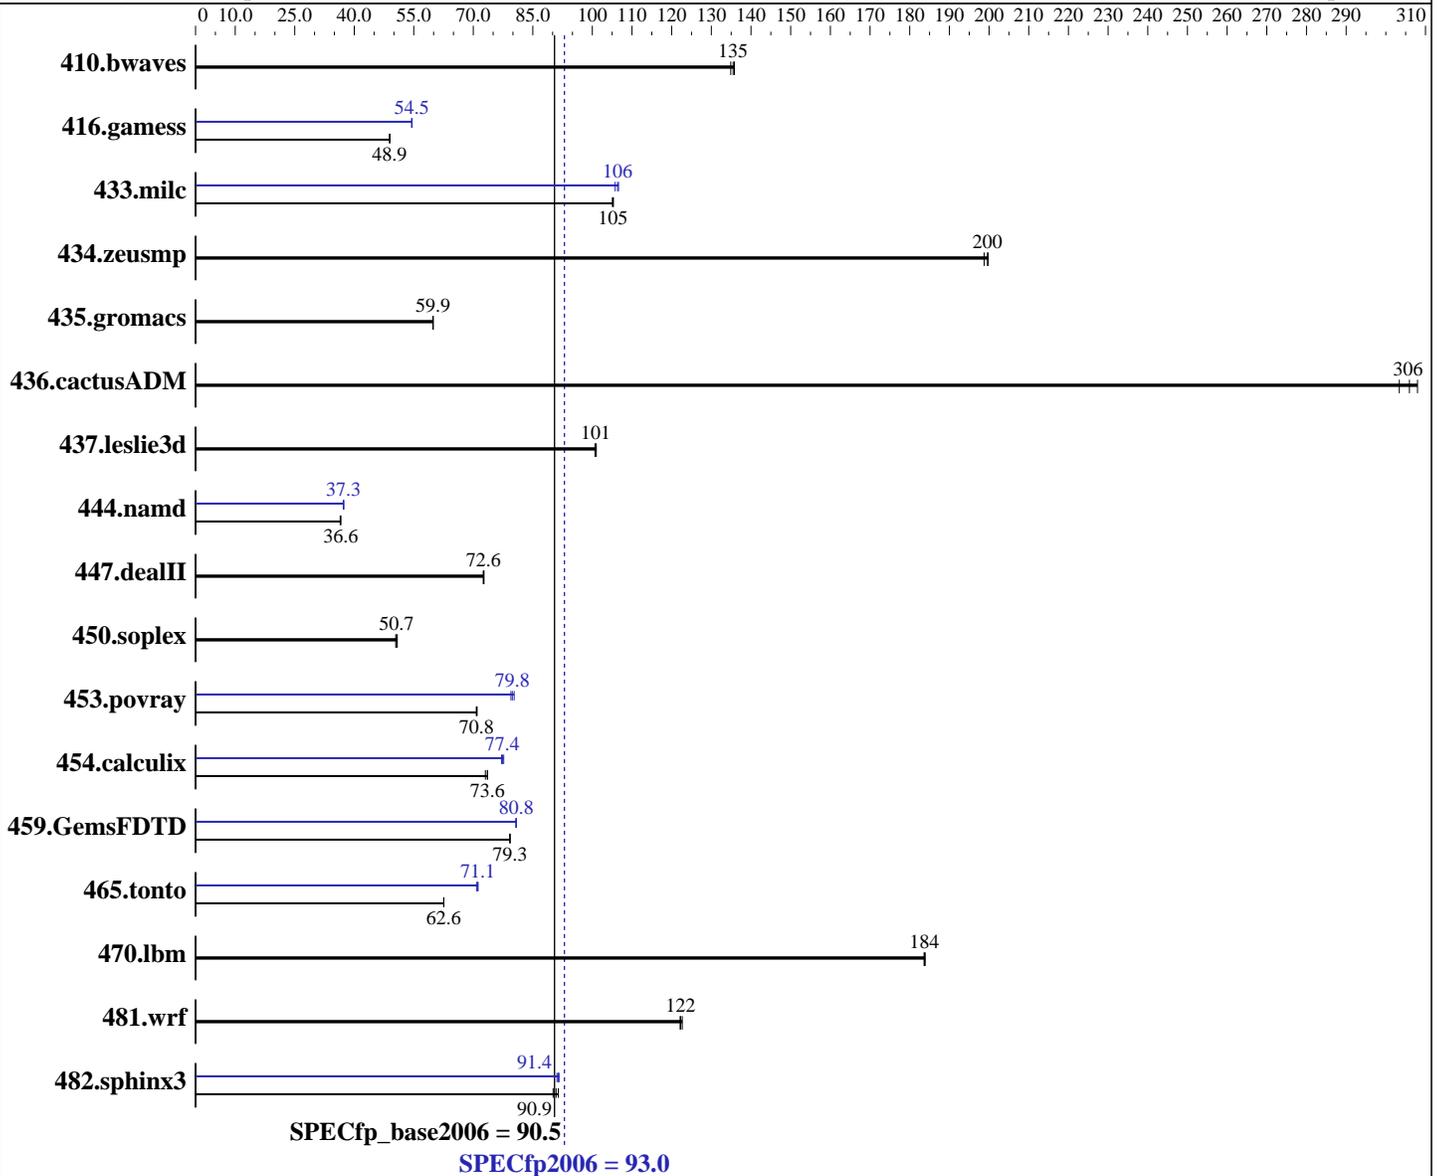

Hardware

CPU Name: Intel Core i5-6600K
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5029A-iL
(X11SAE , Intel Core i5-6600K)

SPECfp2006 = **93.0**

SPECfp_base2006 = **90.5**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2015

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	101	135	100	135	100	136	101	135	100	135	100	136
416.gamess	400	48.9	400	49.0	400	48.9	360	54.4	359	54.5	359	54.6
433.milc	87.2	105	87.4	105	87.2	105	86.8	106	86.1	107	86.3	106
434.zeusmp	45.8	199	45.5	200	45.6	200	45.8	199	45.5	200	45.6	200
435.gromacs	119	59.9	119	59.8	119	59.9	119	59.9	119	59.8	119	59.9
436.cactusADM	39.4	303	38.8	308	39.1	306	39.4	303	38.8	308	39.1	306
437.leslie3d	93.4	101	93.1	101	93.2	101	93.4	101	93.1	101	93.2	101
444.namd	219	36.6	219	36.6	220	36.5	215	37.2	215	37.4	215	37.3
447.dealII	157	72.7	158	72.6	158	72.5	157	72.7	158	72.6	158	72.5
450.soplex	165	50.5	164	50.8	165	50.7	165	50.5	164	50.8	165	50.7
453.povray	75.2	70.8	75.1	70.8	75.0	71.0	66.6	79.8	66.9	79.5	66.2	80.3
454.calculix	112	73.6	112	73.6	113	73.0	107	77.4	107	77.1	106	77.7
459.GemsFDTD	134	79.3	134	79.2	134	79.3	131	80.8	131	80.7	131	80.9
465.tonto	157	62.6	157	62.6	157	62.6	138	71.2	139	70.8	138	71.1
470.lbm	74.7	184	74.8	184	74.8	184	74.7	184	74.8	184	74.8	184
481.wrf	91.1	123	91.4	122	91.5	122	91.1	123	91.4	122	91.5	122
482.sphinx3	214	90.9	213	91.4	216	90.1	213	91.6	214	91.1	213	91.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Wed Nov 25 00:57:19 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Core(TM) i5-6600K CPU @ 3.50GHz
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5029A-iL
(X11SAE , Intel Core i5-6600K)

SPECfp2006 = 93.0

SPECfp_base2006 = 90.5

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2015

Platform Notes (Continued)

```

1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
cache size : 6144 KB

From /proc/meminfo
MemTotal:      65581704 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 24 20:36

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   850G  7.1G  843G   1% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0 11/09/2015
Memory:
4x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5029A-iL
(X11SAE , Intel Core i5-6600K)

SPECfp2006 = 93.0

SPECfp_base2006 = 90.5

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2015
Hardware Availability: Aug-2015
Software Availability: Sep-2015

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5029A-iL
(X11SAE , Intel Core i5-6600K)

SPECfp2006 = 93.0

SPECfp_base2006 = 90.5

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2015
Hardware Availability: Aug-2015
Software Availability: Sep-2015

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5029A-iL
(X11SAE , Intel Core i5-6600K)

SPECfp2006 = 93.0

SPECfp_base2006 = 90.5

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5029A-iL
(X11SAE , Intel Core i5-6600K)

SPECfp2006 = 93.0

SPECfp_base2006 = 90.5

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 16 10:40:01 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 December 2015.