



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS150
(2.00 GHz, Intel Xeon E3-1235L v5)

SPECfp[®]2006 =

81.7

SPECfp_base2006 =

79.6

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Aug-2015

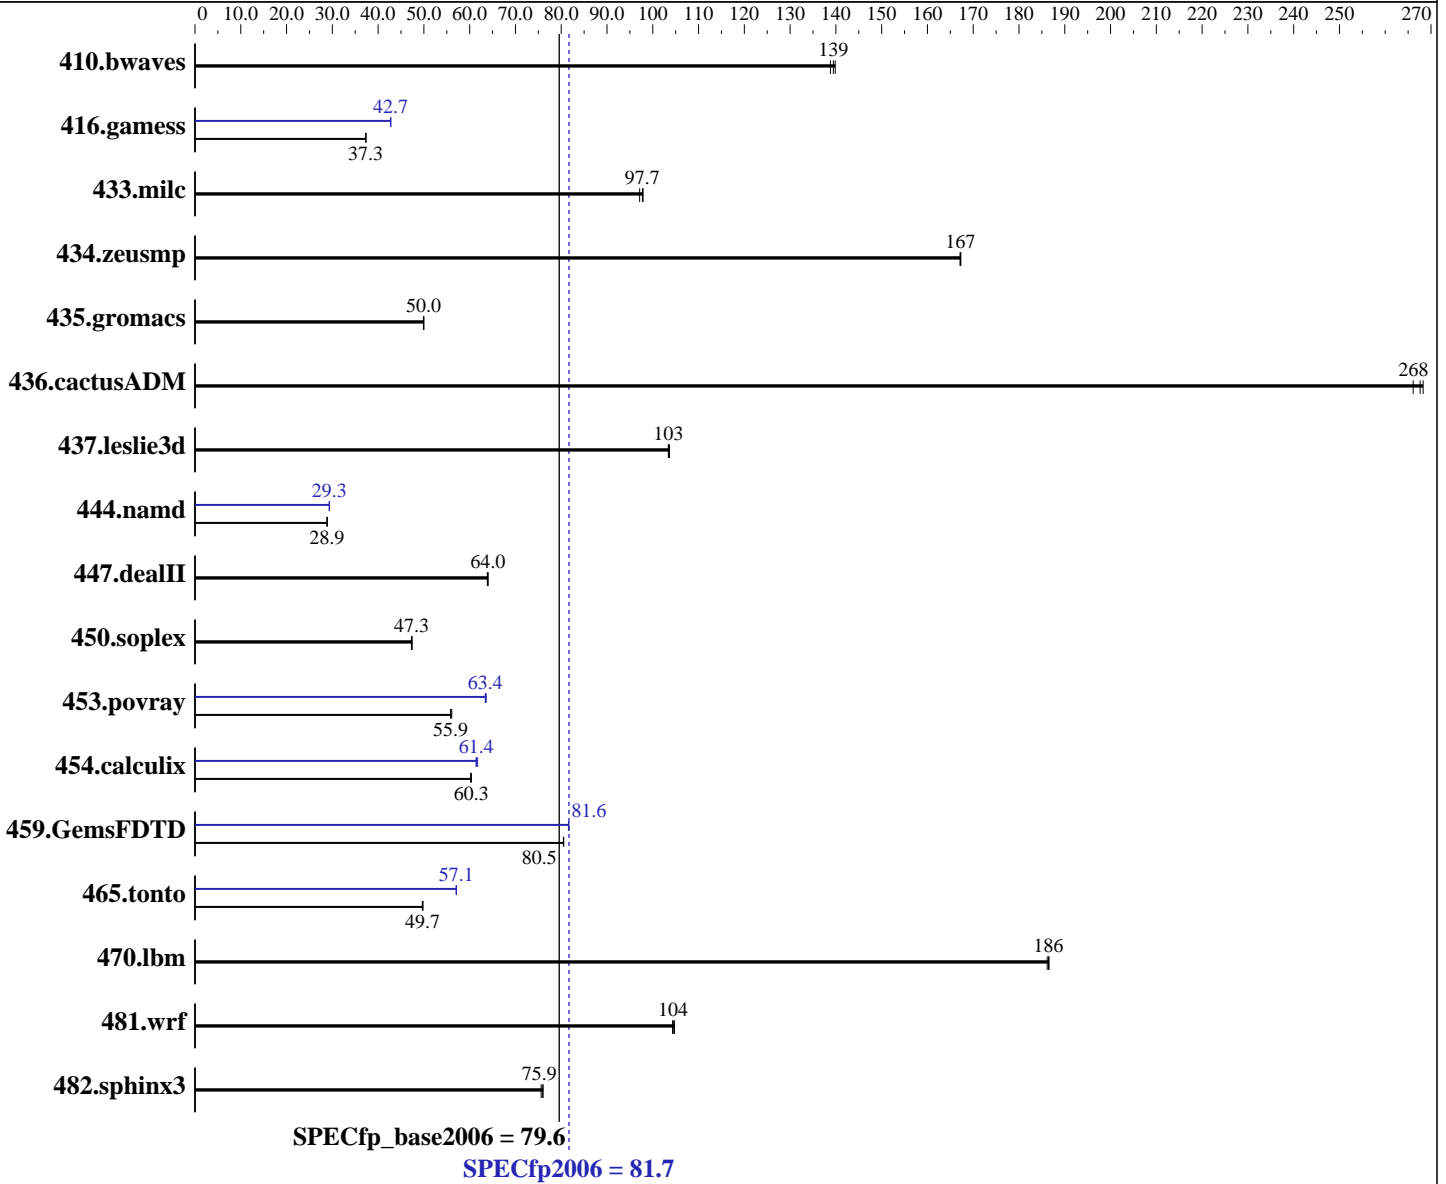

SPECfp_base2006 = 79.6

SPECfp2006 = 81.7

Hardware

CPU Name: Intel Xeon E3-1235L v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.28-4-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **81.7**

Lenovo ThinkServer TS150
(2.00 GHz, Intel Xeon E3-1235L v5)

SPECfp_base2006 = **79.6**

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx8 PC4-2133P-U)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>97.5</u>	<u>139</u>	97.9	139	97.2	140	<u>97.5</u>	<u>139</u>	97.9	139	97.2	140
416.gamess	<u>525</u>	<u>37.3</u>	525	37.3	525	37.3	458	42.7	458	42.8	<u>458</u>	<u>42.7</u>
433.milc	93.8	97.9	<u>93.9</u>	<u>97.7</u>	94.5	97.1	93.8	97.9	<u>93.9</u>	<u>97.7</u>	94.5	97.1
434.zeusmp	54.4	167	54.4	167	<u>54.4</u>	<u>167</u>	54.4	167	54.4	167	<u>54.4</u>	<u>167</u>
435.gromacs	143	49.9	143	50.0	<u>143</u>	<u>50.0</u>	143	49.9	143	50.0	<u>143</u>	<u>50.0</u>
436.cactusADM	44.9	266	44.5	268	<u>44.7</u>	<u>268</u>	44.9	266	44.5	268	<u>44.7</u>	<u>268</u>
437.leslie3d	<u>90.9</u>	<u>103</u>	90.7	104	90.9	103	<u>90.9</u>	<u>103</u>	90.7	104	90.9	103
444.namd	<u>278</u>	<u>28.9</u>	278	28.9	278	28.8	273	29.3	<u>273</u>	<u>29.3</u>	273	29.4
447.dealII	179	64.0	<u>179</u>	<u>64.0</u>	179	63.9	179	64.0	<u>179</u>	<u>64.0</u>	179	63.9
450.soplex	<u>176</u>	<u>47.3</u>	176	47.3	176	47.4	<u>176</u>	<u>47.3</u>	176	47.3	176	47.4
453.povray	95.3	55.8	94.8	56.1	<u>95.2</u>	<u>55.9</u>	83.6	63.6	<u>83.9</u>	<u>63.4</u>	83.9	63.4
454.calculix	<u>137</u>	<u>60.3</u>	137	60.3	137	60.2	134	61.4	<u>134</u>	<u>61.4</u>	134	61.7
459.GemsFDTD	<u>132</u>	<u>80.5</u>	132	80.5	132	80.5	<u>130</u>	<u>81.6</u>	130	81.7	130	81.6
465.tonto	198	49.7	<u>198</u>	<u>49.7</u>	198	49.8	<u>172</u>	<u>57.1</u>	173	57.0	172	57.1
470.lbm	73.6	187	<u>73.7</u>	<u>186</u>	73.8	186	73.6	187	<u>73.7</u>	<u>186</u>	73.8	186
481.wrf	<u>107</u>	<u>104</u>	107	104	107	105	<u>107</u>	<u>104</u>	107	104	107	105
482.sphinx3	258	75.6	256	76.1	<u>257</u>	<u>75.9</u>	258	75.6	256	76.1	<u>257</u>	<u>75.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

EIST Support set to Enabled

C1E Support set to Enabled

C State Support set to Enabled

Turbo Mode set to Enable

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on TS150 Sat Jan 9 03:40:06 2016

This section contains SUT (System Under Test) info as seen by

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **81.7**

Lenovo ThinkServer TS150
(2.00 GHz, Intel Xeon E3-1235L v5)

SPECfp_base2006 = **79.6**

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1235L v5 @ 2.00GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

cache size : 8192 KB

From /proc/meminfo

MemTotal: 32933324 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 0

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12"

VERSION_ID="12"

PRETTY_NAME="SUSE Linux Enterprise Server 12"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12"

uname -a:

Linux TS150 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4)

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 8 06:23

SPEC is set to: /home/cpu2006-1.2-ic16.0

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda3 xfs 693G 27G 667G 4% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 81.7

Lenovo ThinkServer TS150
(2.00 GHz, Intel Xeon E3-1235L v5)

SPECfp_base2006 = 79.6

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Platform Notes (Continued)

BIOS LENOVO FWKT32A 12/25/2015

Memory:

4x Samsung M378A1G43DB0-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 81.7

Lenovo ThinkServer TS150
(2.00 GHz, Intel Xeon E3-1235L v5)

SPECfp_base2006 = 79.6

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Base Portability Flags (Continued)

```

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 81.7

Lenovo ThinkServer TS150
(2.00 GHz, Intel Xeon E3-1235L v5)

SPECfp_base2006 = 79.6

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 81.7

Lenovo ThinkServer TS150
(2.00 GHz, Intel Xeon E3-1235L v5)

SPECfp_base2006 = 79.6

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 9 17:21:47 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 February 2016.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7