



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i5-6402P)

SPECfp<sup>®</sup>2006 = **87.9**

SPECfp\_base2006 = **86.1**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Dec-2015

Software Availability: Sep-2015

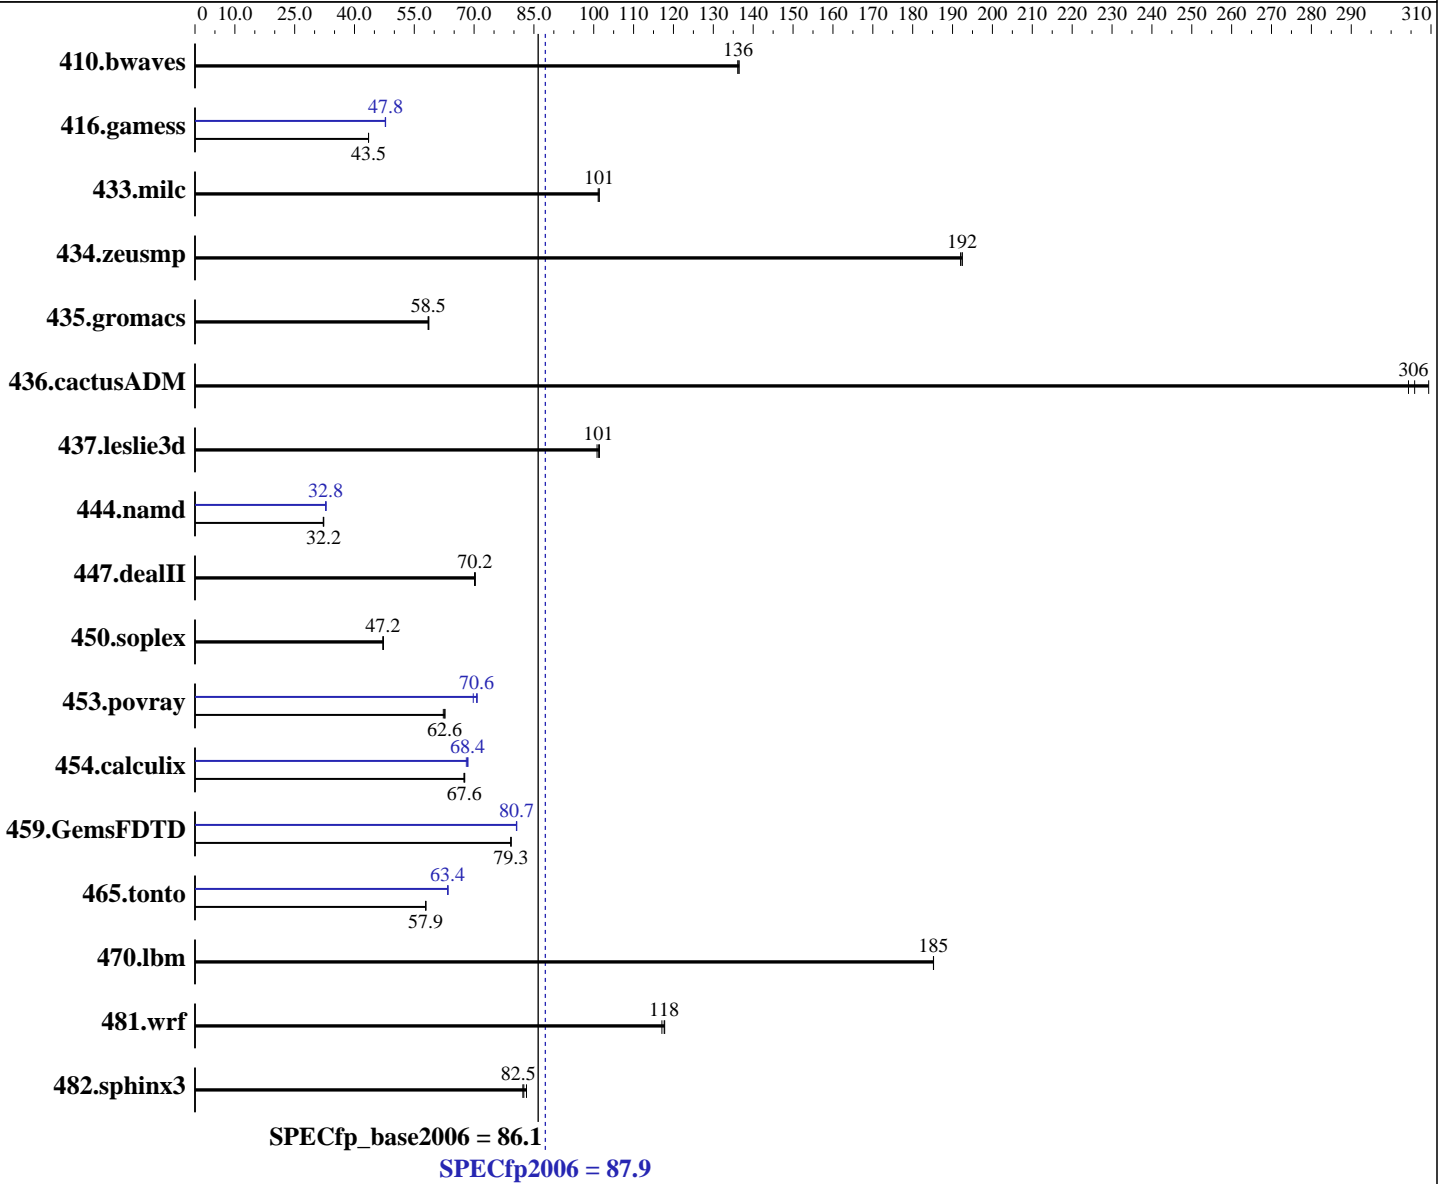

### Hardware

CPU Name: Intel Core i5-6402P  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i5-6402P)

SPECfp2006 = **87.9**

SPECfp\_base2006 = **86.1**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Dec-2015

Software Availability: Sep-2015

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)  
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	99.8	136	<b>99.8</b>	<b>136</b>	99.6	136	99.8	136	<b>99.8</b>	<b>136</b>	99.6	136
416.gamess	<b>450</b>	<b>43.5</b>	450	43.5	450	43.5	410	47.8	<b>410</b>	<b>47.8</b>	410	47.7
433.milc	90.6	101	90.8	101	<b>90.6</b>	<b>101</b>	90.6	101	90.8	101	<b>90.6</b>	<b>101</b>
434.zeusmp	47.4	192	<b>47.3</b>	<b>192</b>	47.3	192	47.4	192	<b>47.3</b>	<b>192</b>	47.3	192
435.gromacs	122	58.7	<b>122</b>	<b>58.5</b>	122	58.5	122	58.7	<b>122</b>	<b>58.5</b>	122	58.5
436.cactusADM	38.6	309	39.3	304	<b>39.1</b>	<b>306</b>	38.6	309	39.3	304	<b>39.1</b>	<b>306</b>
437.leslie3d	<b>92.9</b>	<b>101</b>	93.2	101	92.7	101	<b>92.9</b>	<b>101</b>	93.2	101	92.7	101
444.namd	248	32.3	249	32.2	<b>249</b>	<b>32.2</b>	245	32.8	244	32.9	<b>244</b>	<b>32.8</b>
447.dealII	163	70.3	163	70.1	<b>163</b>	<b>70.2</b>	163	70.3	163	70.1	<b>163</b>	<b>70.2</b>
450.soplex	177	47.1	176	47.3	<b>177</b>	<b>47.2</b>	177	47.1	176	47.3	<b>177</b>	<b>47.2</b>
453.povray	<b>85.0</b>	<b>62.6</b>	85.4	62.3	84.8	62.7	75.2	70.8	<b>75.3</b>	<b>70.6</b>	76.2	69.8
454.calculix	122	67.7	<b>122</b>	<b>67.6</b>	122	67.5	120	68.5	121	68.1	<b>121</b>	<b>68.4</b>
459.GemsFDTD	<b>134</b>	<b>79.3</b>	134	79.2	134	79.3	132	80.7	<b>132</b>	<b>80.7</b>	132	80.6
465.tonto	170	57.9	<b>170</b>	<b>57.9</b>	170	57.9	155	63.5	155	63.4	<b>155</b>	<b>63.4</b>
470.lbm	74.2	185	74.2	185	<b>74.2</b>	<b>185</b>	74.2	185	74.2	185	<b>74.2</b>	<b>185</b>
481.wrf	<b>94.9</b>	<b>118</b>	94.8	118	95.4	117	<b>94.9</b>	<b>118</b>	94.8	118	95.4	117
482.sphinx3	234	83.1	237	82.2	<b>236</b>	<b>82.5</b>	234	83.1	237	82.2	<b>236</b>	<b>82.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Mon Jan 25 23:18:05 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Core(TM) i5-6402P CPU @ 2.80GHz  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i5-6402P)

SPECfp2006 = 87.9

SPECfp\_base2006 = 86.1

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Dec-2015  
Software Availability: Sep-2015

### Platform Notes (Continued)

```

1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
cache size : 6144 KB

From /proc/meminfo
MemTotal:      65581696 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 25 04:48

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   850G  5.2G  845G   1% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0a 12/01/2015
Memory:
4x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i5-6402P)

SPECfp2006 = 87.9

SPECfp\_base2006 = 86.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Dec-2015

Software Availability: Sep-2015

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i5-6402P)

SPECfp2006 = 87.9

SPECfp\_base2006 = 86.1

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Dec-2015  
Software Availability: Sep-2015

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i5-6402P)

SPECfp2006 = 87.9

SPECfp\_base2006 = 86.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Dec-2015

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i5-6402P)

**SPECfp2006 = 87.9**

**SPECfp\_base2006 = 86.1**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jan-2016

**Hardware Availability:** Dec-2015

**Software Availability:** Sep-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Feb 23 17:36:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 February 2016.