



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp®2006 = 117

SPECfp_base2006 = 110

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

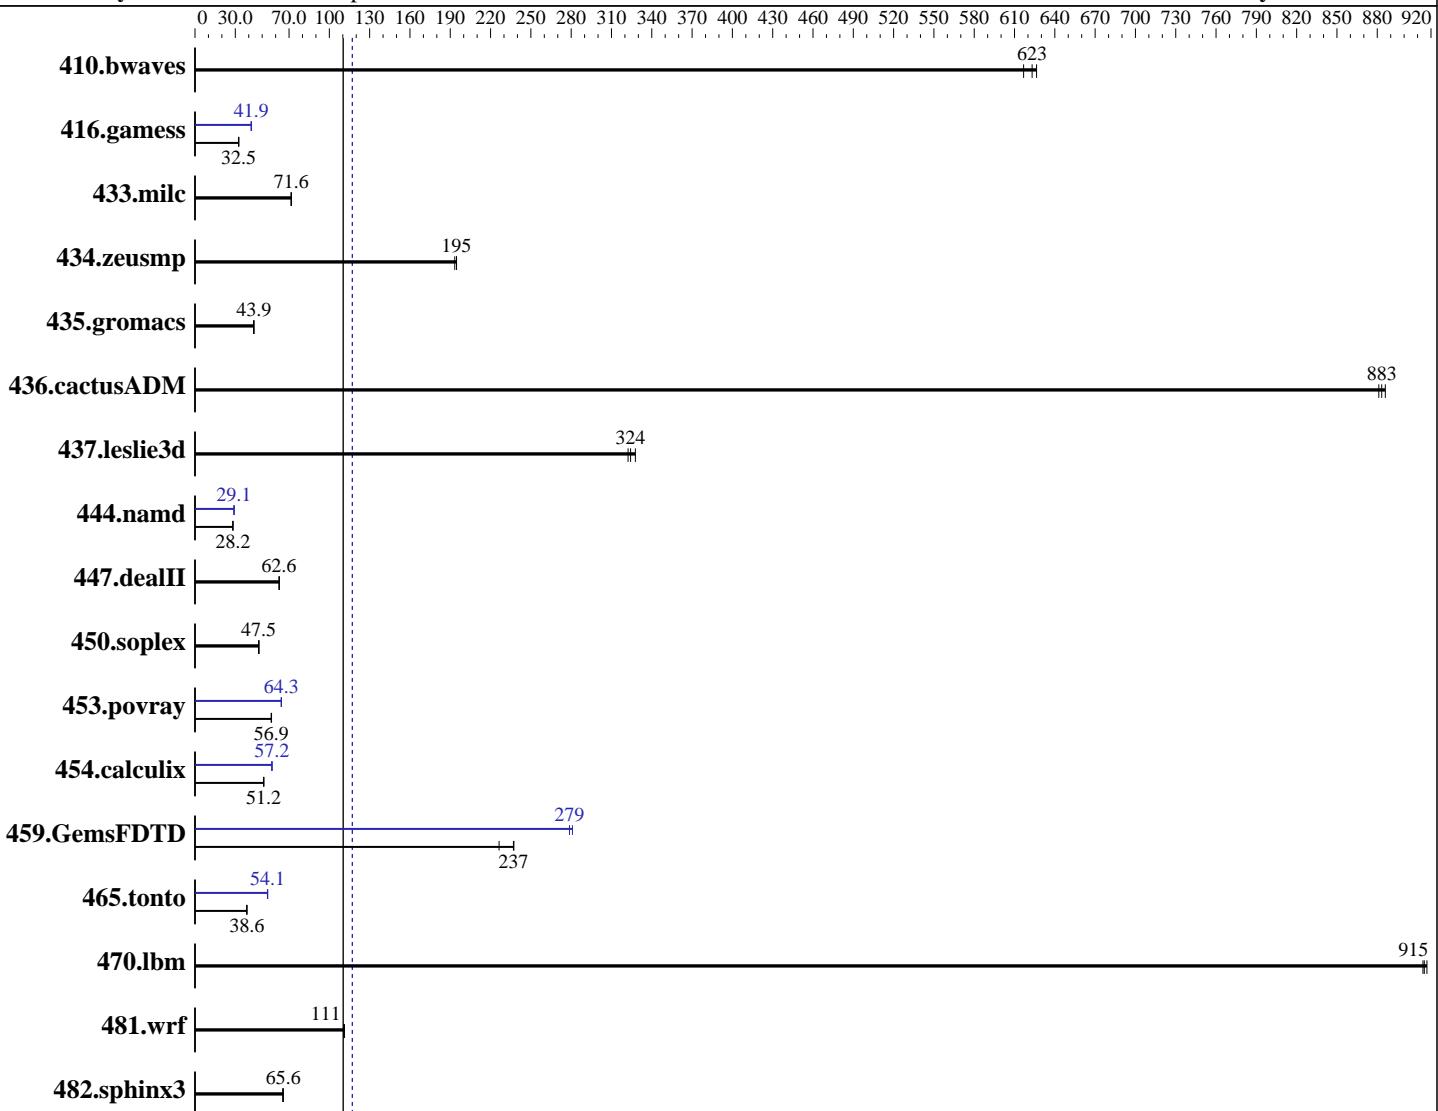

SPECfp_base2006 = 110

SPECfp2006 = 117

Hardware

CPU Name: Intel Xeon E5-2660 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
Compiler: Kernel 3.12.49-11-default
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp2006 = 117

SPECfp_base2006 = 110

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	21.8	623	21.7	626	22.0	617	21.8	623	21.7	626	22.0	617
416.gamess	602	32.5	602	32.5	601	32.6	467	41.9	468	41.9	467	41.9
433.milc	128	71.6	128	71.6	128	71.7	128	71.6	128	71.6	128	71.7
434.zeusmp	46.8	195	47.1	193	46.7	195	46.8	195	47.1	193	46.7	195
435.gromacs	164	43.6	163	43.9	163	43.9	164	43.6	163	43.9	163	43.9
436.cactusADM	13.5	886	13.5	883	13.6	881	13.5	886	13.5	883	13.6	881
437.leslie3d	29.0	324	28.7	328	29.2	322	29.0	324	28.7	328	29.2	322
444.namd	284	28.2	284	28.2	284	28.2	276	29.1	276	29.1	276	29.1
447.dealII	183	62.6	183	62.6	182	62.7	183	62.6	183	62.6	182	62.7
450.soplex	176	47.3	176	47.5	175	47.7	176	47.3	176	47.5	175	47.7
453.povray	93.5	56.9	93.8	56.7	93.4	57.0	82.7	64.3	82.8	64.2	82.8	64.3
454.calculix	161	51.2	161	51.1	161	51.2	144	57.2	144	57.2	144	57.3
459.GemsFDTD	44.7	237	46.9	226	44.8	237	38.1	279	38.1	279	37.8	281
465.tonto	255	38.5	255	38.6	255	38.6	182	53.9	182	54.1	182	54.1
470.lbm	15.0	914	15.0	917	15.0	915	15.0	914	15.0	917	15.0	915
481.wrf	100	111	101	111	100	111	100	111	101	111	100	111
482.sphinx3	297	65.7	298	65.3	297	65.6	297	65.7	298	65.3	297	65.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Operating Mode set to Maximum Performance

Hyper-Threading set to Disabled

COD Preference set to Disable

Early Snoop Preference set to Disable

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fb8667b5a285932ceab81e28219e1
running on XinYi-mlk-04 Fri Apr 22 15:56:17 2016

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp2006 =

117

SPECfp_base2006 =

110

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2660 v4@ 2.00GHz
        2 "physical id"s (chips)
        28 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 14
        siblings : 14
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    cache size : 35840 KB
```

```
From /proc/meminfo
    MemTotal:       263960276 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux XinYi-mlk-04 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 22 10:42
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size Used Avail Use% Mounted on
/dev/sda4        xfs   701G  11G  691G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp2006 =

117

SPECfp_base2006 =

110

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[TCE123H-2.10]- 03/25/2016

Memory:

8x NO DIMM Unknown

16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

OMP_NUM_THREADS = "28"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp2006 = 117

SPECfp_base2006 = 110

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp2006 =

117

SPECfp_base2006 =

110

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp2006 = 117

SPECfp_base2006 = 110

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 1 19:08:25 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 June 2016.