



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 102

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

SPECfp_base2006 = 97.6

CPU2006 license: 55


Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

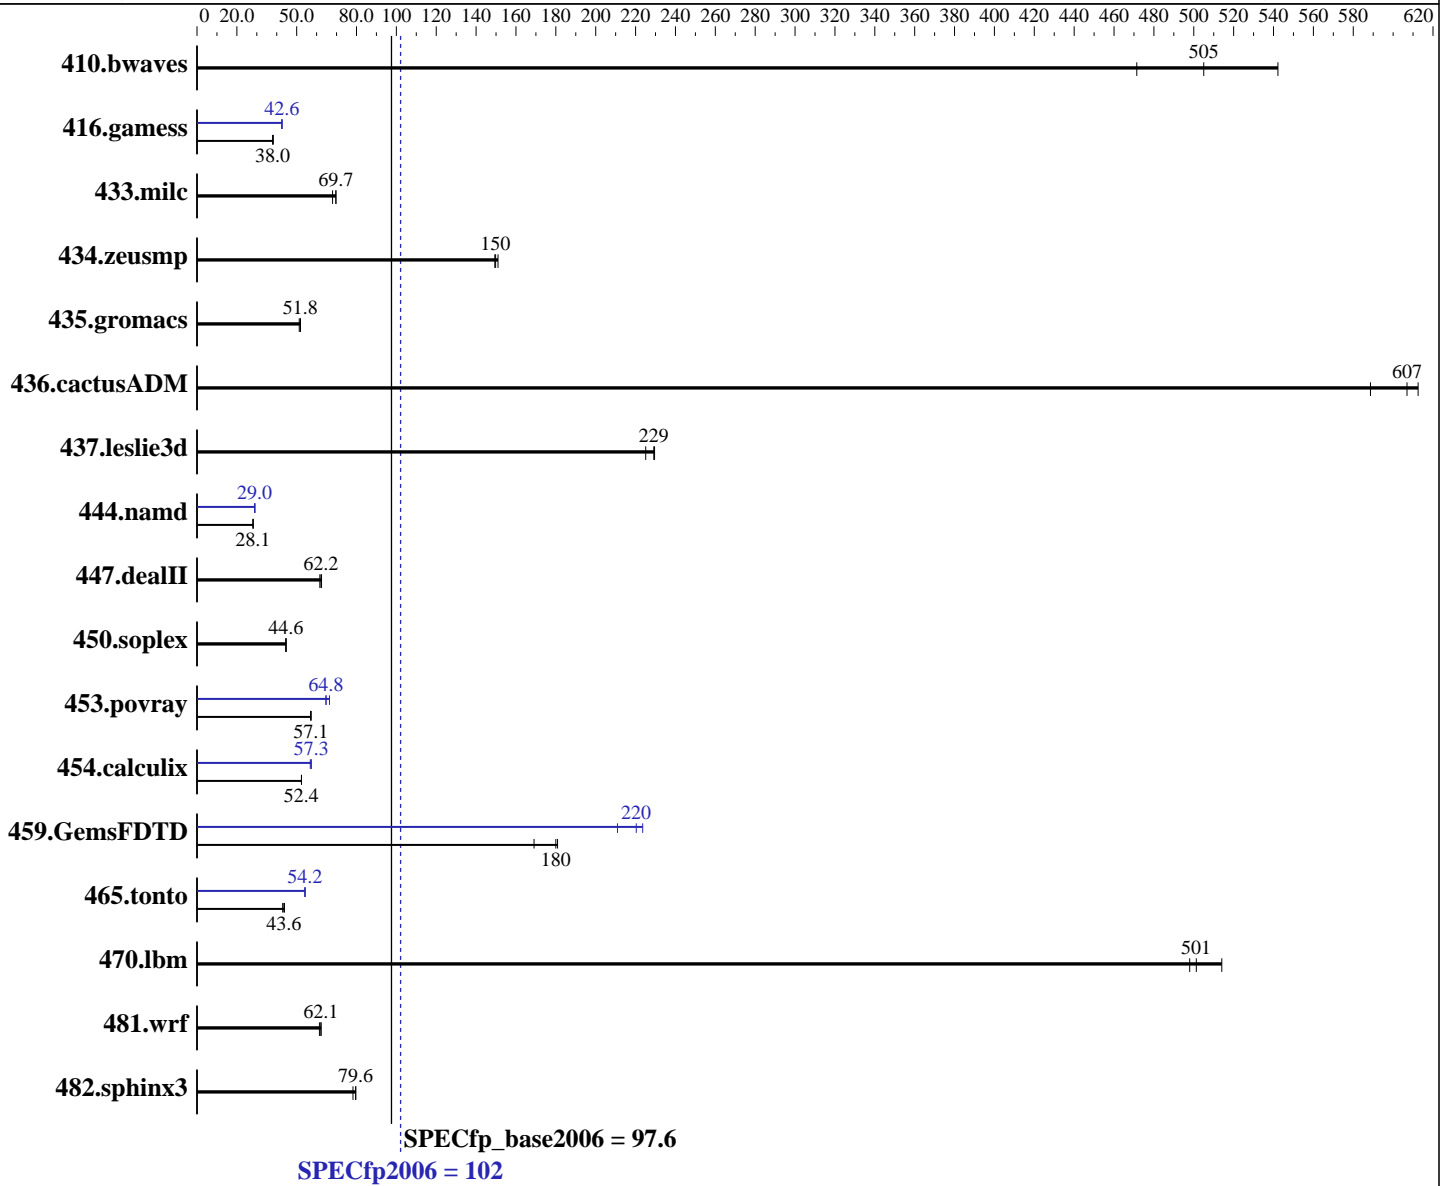

Hardware

CPU Name: Intel Xeon E5-4627 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: btrfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 102

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

SPECfp_base2006 = 97.6

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R)
 Disk Subsystem: 1 x 800 GB SATA SSD
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	28.8	471	25.1	542	<u>26.9</u>	<u>505</u>	28.8	471	25.1	542	<u>26.9</u>	<u>505</u>
416.gamess	512	38.2	516	38.0	<u>515</u>	<u>38.0</u>	459	42.7	460	42.5	<u>460</u>	<u>42.6</u>
433.milc	135	68.0	<u>132</u>	<u>69.7</u>	132	69.7	135	68.0	<u>132</u>	<u>69.7</u>	132	69.7
434.zeusmp	60.9	149	60.3	151	<u>60.7</u>	<u>150</u>	60.9	149	60.3	151	<u>60.7</u>	<u>150</u>
435.gromacs	<u>138</u>	<u>51.8</u>	138	51.9	139	51.3	<u>138</u>	<u>51.8</u>	138	51.9	139	51.3
436.cactusADM	20.3	589	<u>19.7</u>	<u>607</u>	19.5	613	20.3	589	<u>19.7</u>	<u>607</u>	19.5	613
437.leslie3d	41.0	230	41.8	225	<u>41.0</u>	<u>229</u>	41.0	230	41.8	225	<u>41.0</u>	<u>229</u>
444.namd	<u>285</u>	<u>28.1</u>	285	28.1	285	28.1	<u>277</u>	<u>29.0</u>	277	29.0	277	29.0
447.dealII	186	61.6	183	62.5	<u>184</u>	<u>62.2</u>	186	61.6	183	62.5	<u>184</u>	<u>62.2</u>
450.soplex	187	44.5	186	44.8	<u>187</u>	<u>44.6</u>	187	44.5	186	44.8	<u>187</u>	<u>44.6</u>
453.povray	93.3	57.0	93.0	57.2	<u>93.1</u>	<u>57.1</u>	82.3	64.7	80.1	66.5	<u>82.1</u>	<u>64.8</u>
454.calculix	<u>157</u>	<u>52.4</u>	157	52.4	157	52.4	144	57.3	<u>144</u>	<u>57.3</u>	145	56.8
459.GemsFDTD	62.8	169	<u>58.9</u>	<u>180</u>	58.7	181	47.5	224	<u>48.2</u>	<u>220</u>	50.3	211
465.tonto	224	43.9	229	43.0	<u>226</u>	<u>43.6</u>	<u>182</u>	<u>54.2</u>	182	54.2	182	54.2
470.lbm	27.6	498	26.7	514	<u>27.4</u>	<u>501</u>	27.6	498	26.7	514	<u>27.4</u>	<u>501</u>
481.wrf	182	61.4	<u>180</u>	<u>62.1</u>	179	62.2	182	61.4	<u>180</u>	<u>62.1</u>	179	62.2
482.sphinx3	249	78.2	<u>245</u>	<u>79.6</u>	245	79.6	249	78.2	<u>245</u>	<u>79.6</u>	245	79.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Snoop Mode set to Home Snoop
 Virtualization Technology disabled
 System Profile set to custom
 CPU Power Management set to Maximum Performance
 C States set to Autonomous
 C1E disabled
 Energy Efficient Turbo disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 102

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

SPECfp_base2006 = 97.6

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Platform Notes (Continued)

Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1
running on linux-t2sb Thu May 12 12:24:06 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4627 v4 @ 2.60GHz
 4 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10
siblings : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal: 529326752 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-t2sb 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 102

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

SPECfp_base2006 = 97.6

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Platform Notes (Continued)

```
run-level 3 May 12 07:10 last=5
```

```
SPEC is set to: /root/cpu2006-1.2
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        btrfs 461G  12G  449G   3% /
```

```
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS Dell Inc. 1.0.0 04/26/2016
```

```
Memory:
```

```
31x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
1x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz
16x Not Specified Not Specified
```

```
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
```

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

```
OMP_NUM_THREADS = "20"
```

```
Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1
```

```
Transparent Huge Pages enabled with:
```

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 102

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

SPECfp_base2006 = 97.6

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 102

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

SPECfp_base2006 = 97.6

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 102

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

SPECfp_base2006 = 97.6

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 26 16:13:15 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 July 2016.