



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = **114**

PowerEdge R830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp_base2006 = **108**

CPU2006 license: 55


Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

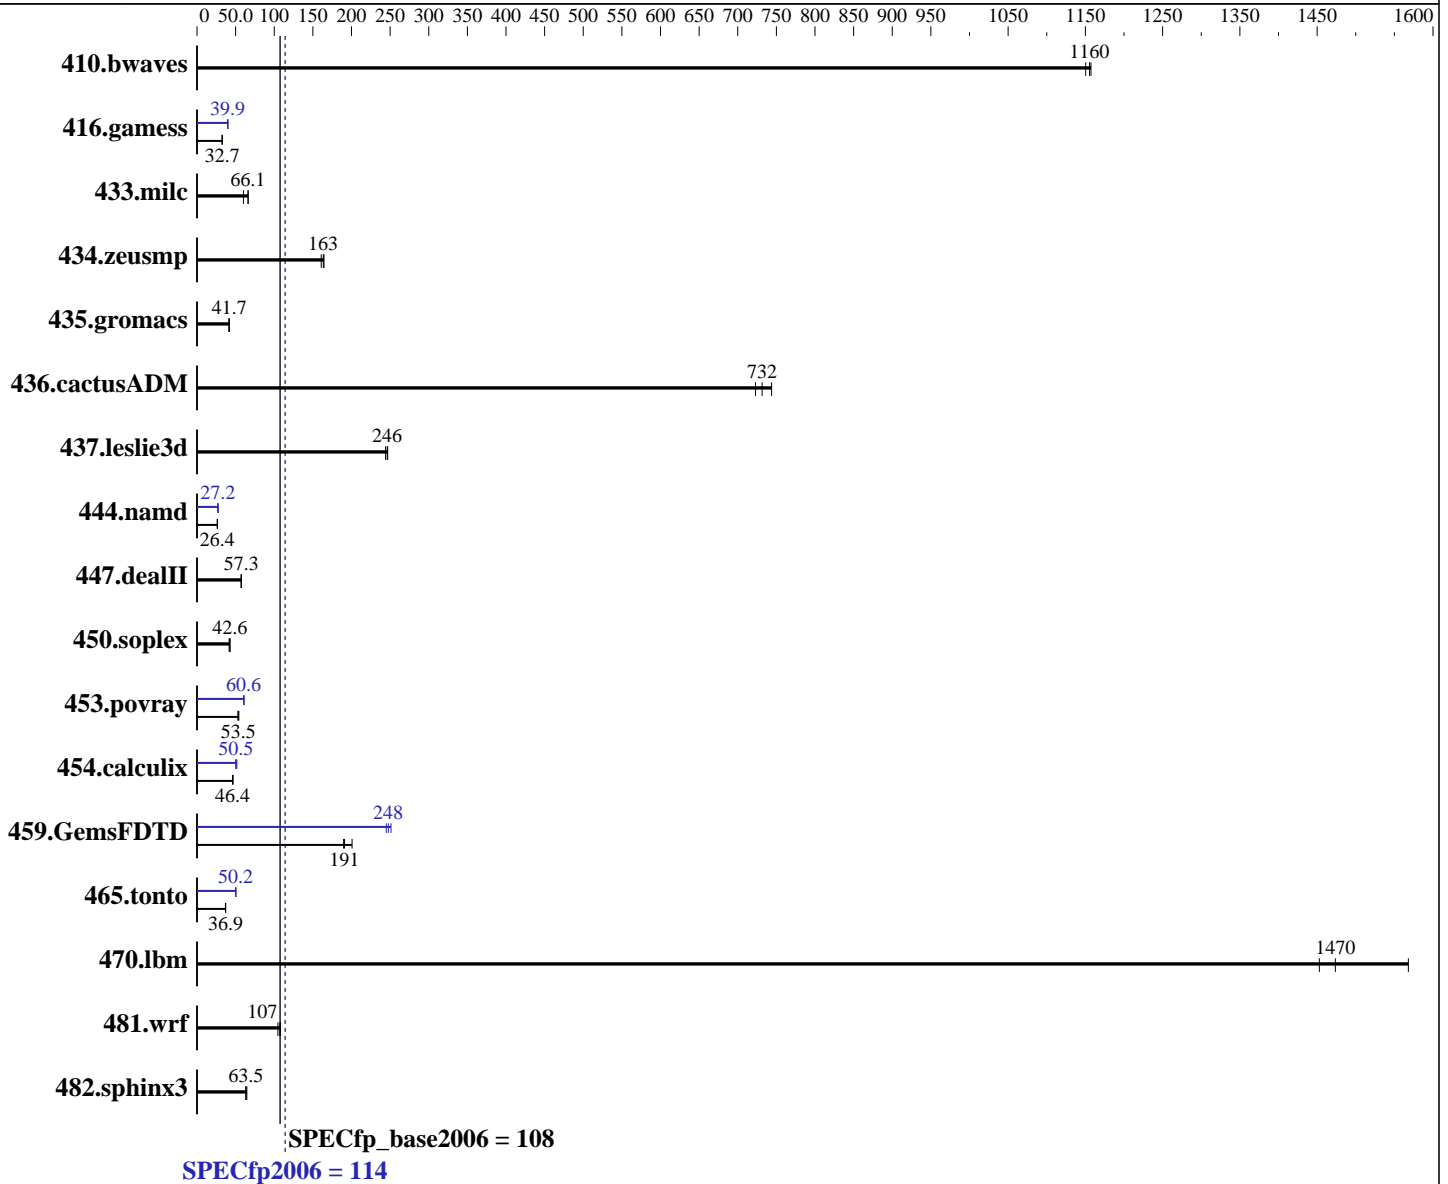

Hardware

CPU Name: Intel Xeon E5-4667 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: btrfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 114

PowerEdge R830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp_base2006 = 108

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R)
 Disk Subsystem: 1 x 800 GB SATA SSD
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>11.8</u>	<u>1160</u>	11.8	1150	11.7	1160	<u>11.8</u>	<u>1160</u>	11.8	1150	11.7	1160
416.gamess	599	32.7	600	32.6	<u>600</u>	<u>32.7</u>	492	39.8	490	40.0	<u>491</u>	<u>39.9</u>
433.milc	139	66.2	<u>139</u>	<u>66.1</u>	153	60.1	139	66.2	<u>139</u>	<u>66.1</u>	153	60.1
434.zeusmp	56.6	161	<u>55.7</u>	<u>163</u>	55.3	164	56.6	161	<u>55.7</u>	<u>163</u>	55.3	164
435.gromacs	171	41.7	<u>171</u>	<u>41.7</u>	172	41.4	171	41.7	<u>171</u>	<u>41.7</u>	172	41.4
436.cactusADM	16.1	744	16.5	723	<u>16.3</u>	<u>732</u>	16.1	744	16.5	723	<u>16.3</u>	<u>732</u>
437.leslie3d	38.1	247	<u>38.2</u>	<u>246</u>	38.5	244	38.1	247	<u>38.2</u>	<u>246</u>	38.5	244
444.namd	304	26.4	<u>304</u>	<u>26.4</u>	304	26.4	295	27.2	295	27.2	<u>295</u>	<u>27.2</u>
447.dealII	200	57.2	<u>200</u>	<u>57.3</u>	199	57.4	200	57.2	<u>200</u>	<u>57.3</u>	199	57.4
450.soplex	<u>196</u>	<u>42.6</u>	195	42.7	201	41.6	<u>196</u>	<u>42.6</u>	195	42.7	201	41.6
453.povray	98.2	54.2	<u>99.5</u>	<u>53.5</u>	100	52.9	<u>87.8</u>	<u>60.6</u>	88.0	60.4	87.4	60.9
454.calculix	<u>178</u>	<u>46.4</u>	178	46.4	178	46.2	160	51.6	165	50.1	<u>163</u>	<u>50.5</u>
459.GemsFDTD	55.9	190	<u>55.6</u>	<u>191</u>	52.9	201	42.2	251	43.3	245	<u>42.8</u>	<u>248</u>
465.tonto	<u>267</u>	<u>36.9</u>	265	37.2	267	36.8	196	50.1	196	50.3	<u>196</u>	<u>50.2</u>
470.lbm	8.76	1570	<u>9.32</u>	<u>1470</u>	9.46	1450	8.76	1570	<u>9.32</u>	<u>1470</u>	9.46	1450
481.wrf	107	105	<u>104</u>	<u>107</u>	103	108	107	105	<u>104</u>	<u>107</u>	103	108
482.sphinx3	302	64.5	309	63.1	<u>307</u>	<u>63.5</u>	302	64.5	309	63.1	<u>307</u>	<u>63.5</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Snoop Mode set to Home Snoop
 Virtualization Technology disabled
 System Profile set to custom
 CPU Power Management set to Maximum Performance
 C States set to Autonomous
 C1E disabled
 Energy Efficient Turbo disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 114

PowerEdge R830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp_base2006 = 108

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Platform Notes (Continued)

Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1
running on linux-t2sb Mon May 9 06:54:33 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4667 v4 @ 2.20GHz
 4 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal: 529326752 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-t2sb 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 114

PowerEdge R830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp_base2006 = 108

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Platform Notes (Continued)

run-level 3 May 9 01:21

SPEC is set to: /root/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	btrfs	461G	12G	446G	3%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 04/26/2016

Memory:

31x	00AD063200AD	HMA82GR7MFR8N-UH	16 GB	2 rank	2400 MHz
1x	00CE00B300CE	M393A2K43BB1-CRC	16 GB	2 rank	2400 MHz
16x	Not Specified	Not Specified			

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

OMP_NUM_THREADS = "72"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 114

PowerEdge R830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp_base2006 = 108

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 114

PowerEdge R830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp_base2006 = 108

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 114

PowerEdge R830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp_base2006 = 108

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 26 16:13:11 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 July 2016.