



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp®2006 = **111**

Huawei CH220 V3(Intel Xeon E5-2640 v4)

SPECfp\_base2006 = **105**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

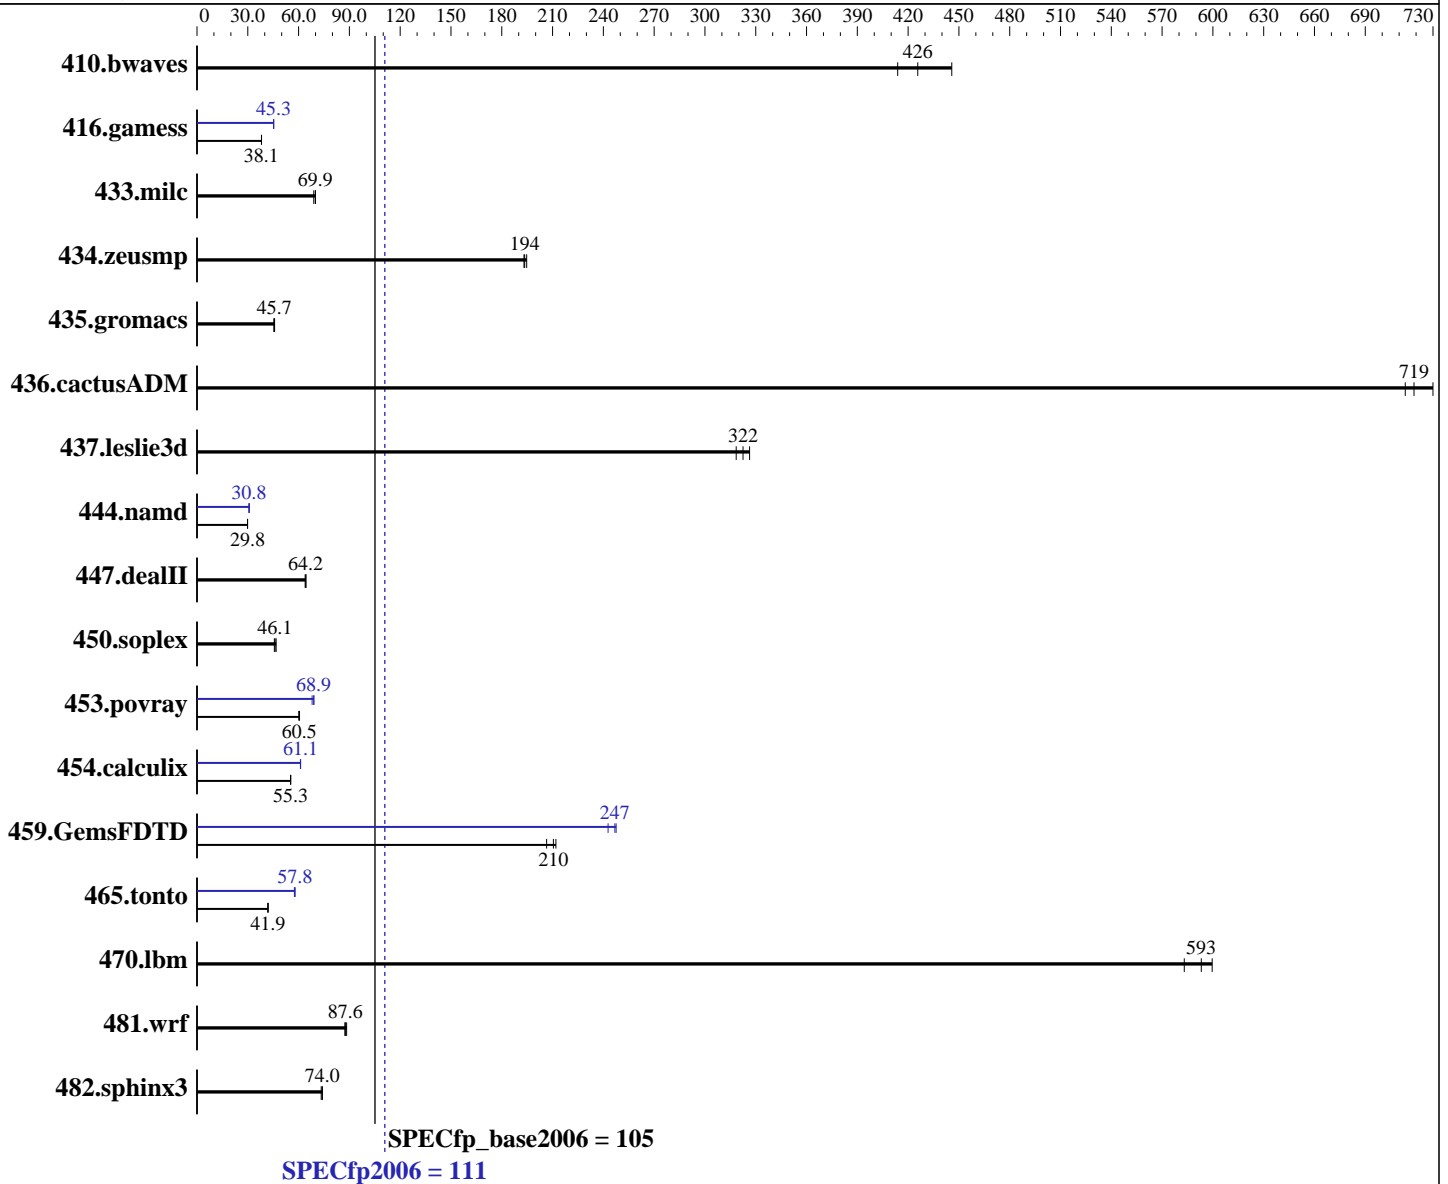

SPECfp2006 = 111

### Hardware

CPU Name: Intel Xeon E5-2640 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **111**

Huawei CH220 V3(Intel Xeon E5-2640 v4)

SPECfp\_base2006 = **105**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R, running at 2133 MHz)  
Disk Subsystem: 1 x 800G SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32.8	414	<b>31.9</b>	<b>426</b>	30.5	446	32.8	414	<b>31.9</b>	<b>426</b>	30.5	446
416.gamess	514	38.1	514	38.1	<b>514</b>	<b>38.1</b>	<b>432</b>	<b>45.3</b>	432	45.3	433	45.2
433.milc	131	70.0	<b>131</b>	<b>69.9</b>	133	69.0	131	70.0	<b>131</b>	<b>69.9</b>	133	69.0
434.zeusmp	47.1	193	<b>47.0</b>	<b>194</b>	46.7	195	47.1	193	<b>47.0</b>	<b>194</b>	46.7	195
435.gromacs	156	45.8	157	45.4	<b>156</b>	<b>45.7</b>	156	45.8	157	45.4	<b>156</b>	<b>45.7</b>
436.cactusADM	<b>16.6</b>	<b>719</b>	16.4	730	16.7	714	<b>16.6</b>	<b>719</b>	16.4	730	16.7	714
437.leslie3d	<b>29.1</b>	<b>322</b>	29.5	318	28.8	326	<b>29.1</b>	<b>322</b>	29.5	318	28.8	326
444.namd	<b>269</b>	<b>29.8</b>	268	29.9	269	29.8	<b>261</b>	<b>30.8</b>	260	30.8	261	30.8
447.dealII	178	64.3	<b>178</b>	<b>64.2</b>	179	63.9	178	64.3	<b>178</b>	<b>64.2</b>	179	63.9
450.soplex	<b>181</b>	<b>46.1</b>	178	46.7	183	45.7	<b>181</b>	<b>46.1</b>	178	46.7	183	45.7
453.povray	87.9	60.6	<b>87.9</b>	<b>60.5</b>	88.5	60.1	78.2	68.0	77.0	69.1	<b>77.2</b>	<b>68.9</b>
454.calculix	149	55.3	149	55.2	<b>149</b>	<b>55.3</b>	135	61.1	<b>135</b>	<b>61.1</b>	135	61.2
459.GemsFDTD	<b>50.4</b>	<b>210</b>	51.4	206	50.1	212	42.9	248	<b>43.0</b>	<b>247</b>	43.7	243
465.tonto	<b>235</b>	<b>41.9</b>	235	41.9	235	41.9	<b>170</b>	<b>57.8</b>	171	57.5	170	57.9
470.lbm	23.6	583	22.9	600	<b>23.2</b>	<b>593</b>	23.6	583	22.9	600	<b>23.2</b>	<b>593</b>
481.wrf	<b>127</b>	<b>87.6</b>	126	88.4	128	87.3	<b>127</b>	<b>87.6</b>	126	88.4	128	87.3
482.sphinx3	<b>263</b>	<b>74.0</b>	266	73.4	263	74.0	<b>263</b>	<b>74.0</b>	266	73.4	263	74.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Set Snoop Mode to HS mode  
Set Patrol Scrub to Disable  
Set Hyper-Threading to Disable  
Sysinfo program /spec/spec16/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-n8wl Thu Dec 8 06:42:39 2016

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 111

Huawei CH220 V3(Intel Xeon E5-2640 v4)

SPECfp\_base2006 = 105

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2640 v4 @ 2.40GHz

2 "physical id"s (chips)

20 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 10

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

cache size : 25600 KB

From /proc/meminfo

MemTotal: 264056708 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 1

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION\_ID="12.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux linux-n8wl 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Dec 8 06:35

SPEC is set to: /spec/spec16

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	632G	11G	619G	2%	/spec

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 111

Huawei CH220 V3(Intel Xeon E5-2640 v4)

SPECfp\_base2006 = 105

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.31 08/22/2016

Memory:

16x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/spec/spec16/libs/32:/spec/spec16/libs/64:/spec/spec16/sh"

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 111

Huawei CH220 V3(Intel Xeon E5-2640 v4)

SPECfp\_base2006 = 105

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

## Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 111

Huawei CH220 V3(Intel Xeon E5-2640 v4)

SPECfp\_base2006 = 105

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 111

Huawei CH220 V3(Intel Xeon E5-2640 v4)

SPECfp\_base2006 = 105

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

465.tonto (continued):

-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 28 10:52:07 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 December 2016.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7