



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp<sup>®</sup>2006 = **106**

Lenovo ThinkServer RS160  
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp\_base2006 = **104**

CPU2006 license: 9017


Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

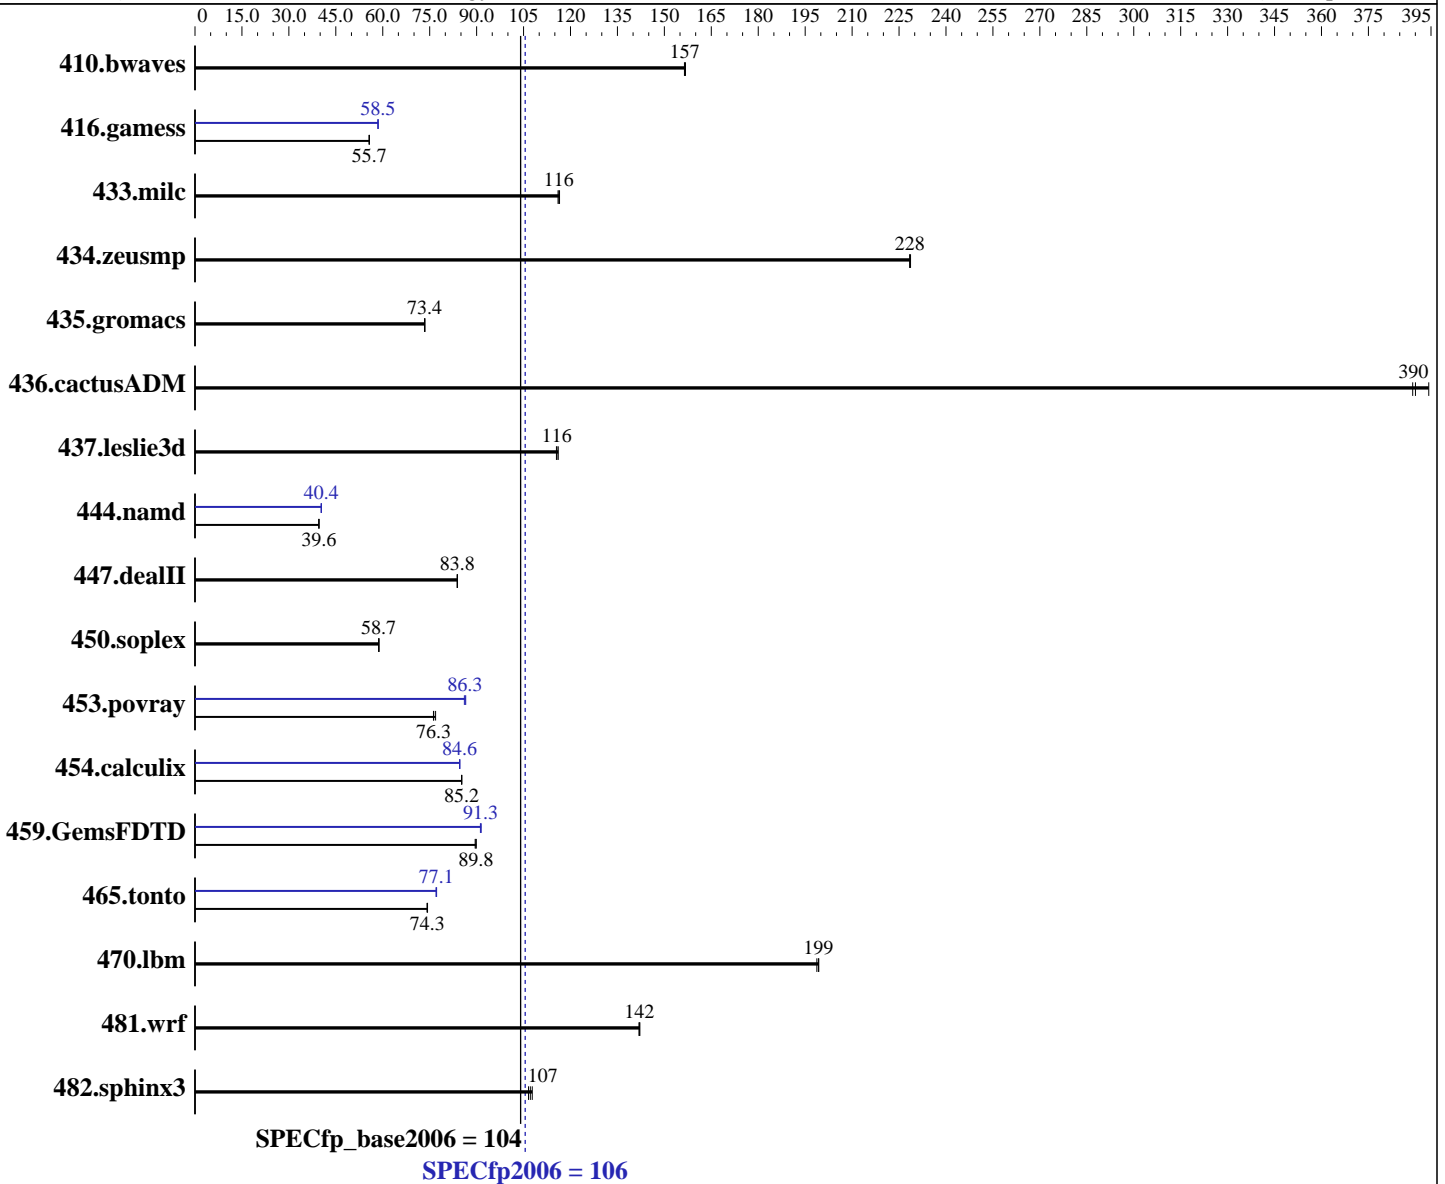

### Hardware

CPU Name: Intel Xeon E3-1240 v6  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Kernel 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp2006 = **106**

Lenovo ThinkServer RS160  
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp\_base2006 = **104**

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2400T-E)  
Disk Subsystem: 1 x 960 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	86.7	157	<b>86.8</b>	<b>157</b>	86.9	156	86.7	157	<b>86.8</b>	<b>157</b>	86.9	156
416.gamess	351	55.7	<b>352</b>	<b>55.7</b>	352	55.6	335	58.5	334	58.5	<b>335</b>	<b>58.5</b>
433.milc	<b>78.9</b>	<b>116</b>	79.1	116	78.8	116	<b>78.9</b>	<b>116</b>	79.1	116	78.8	116
434.zeusmp	39.8	228	39.8	229	<b>39.8</b>	<b>228</b>	39.8	228	39.8	229	<b>39.8</b>	<b>228</b>
435.gromacs	97.2	73.5	<b>97.2</b>	<b>73.4</b>	97.4	73.3	97.2	73.5	<b>97.2</b>	<b>73.4</b>	97.4	73.3
436.cactusADM	30.7	389	30.3	394	<b>30.6</b>	<b>390</b>	30.7	389	30.3	394	<b>30.6</b>	<b>390</b>
437.leslie3d	81.0	116	<b>81.3</b>	<b>116</b>	81.4	116	81.0	116	<b>81.3</b>	<b>116</b>	81.4	116
444.namd	<b>203</b>	<b>39.6</b>	203	39.6	203	39.6	199	40.4	199	40.4	<b>199</b>	<b>40.4</b>
447.dealII	136	83.9	<b>136</b>	<b>83.8</b>	137	83.8	136	83.9	<b>136</b>	<b>83.8</b>	137	83.8
450.soplex	142	58.7	<b>142</b>	<b>58.7</b>	142	58.8	142	58.7	<b>142</b>	<b>58.7</b>	142	58.8
453.povray	69.8	76.2	<b>69.7</b>	<b>76.3</b>	69.2	76.9	61.8	86.1	<b>61.6</b>	<b>86.3</b>	61.5	86.5
454.calculix	96.8	85.2	96.8	85.3	<b>96.8</b>	<b>85.2</b>	97.4	84.7	97.6	84.6	<b>97.6</b>	<b>84.6</b>
459.GemsFDTD	118	89.5	<b>118</b>	<b>89.8</b>	118	89.9	<b>116</b>	<b>91.3</b>	116	91.4	116	91.2
465.tonto	132	74.3	<b>132</b>	<b>74.3</b>	133	74.1	127	77.2	128	77.0	<b>128</b>	<b>77.1</b>
470.lbm	68.9	199	69.1	199	<b>69.0</b>	<b>199</b>	68.9	199	69.1	199	<b>69.0</b>	<b>199</b>
481.wrf	<b>78.6</b>	<b>142</b>	78.6	142	78.7	142	<b>78.6</b>	<b>142</b>	78.6	142	78.7	142
482.sphinx3	183	107	<b>182</b>	<b>107</b>	181	108	183	107	<b>182</b>	<b>107</b>	181	108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Intel Hyper Threading Technology set to Disabled  
Boot performance mode set to Turbo Performance  
Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on rs160 Wed Jul 19 23:01:38 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

**SPECfp2006 = 106**

Lenovo ThinkServer RS160  
(3.70 GHz, Intel Xeon E3-1240 v6)

**SPECfp\_base2006 = 104**

**CPU2006 license:** 9017

**Test date:** Jul-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Jun-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

### Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1240 v6 @ 3.70GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
cache size : 8192 KB

```

```

From /proc/meminfo
MemTotal:      32890216 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

```

uname -a:
Linux rs160 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Jul 19 22:59

```

SPEC is set to: /home/cpu2006-1.2-ic17.0u3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   838G  12G  827G   2% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. VB1TS223 03/16/2017

Memory:

2x Micron 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400 MHz  
2x Not Specified Not Specified

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

**SPECfp2006 = 106**

Lenovo ThinkServer RS160  
(3.70 GHz, Intel Xeon E3-1240 v6)

**SPECfp\_base2006 = 104**

**CPU2006 license:** 9017

**Test date:** Jul-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Jun-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 106

Lenovo ThinkServer RS160  
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp\_base2006 = 104

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:  
icc -m64  
C++ benchmarks:  
icpc -m64  
Fortran benchmarks:  
ifort -m64  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
433.milc: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

**SPECfp2006 = 106**

Lenovo ThinkServer RS160  
(3.70 GHz, Intel Xeon E3-1240 v6)

**SPECfp\_base2006 = 104**

**CPU2006 license:** 9017

**Test date:** Jul-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Jun-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

Lenovo ThinkServer RS160  
(3.70 GHz, Intel Xeon E3-1240 v6)

**SPECfp2006 = 106**

**SPECfp\_base2006 = 104**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Jul-2017

**Hardware Availability:** Jun-2017

**Software Availability:** Apr-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-KBL-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-KBL-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 23 13:37:37 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 August 2017.