



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 73.6

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Nov-2017

Software Availability: Sep-2017

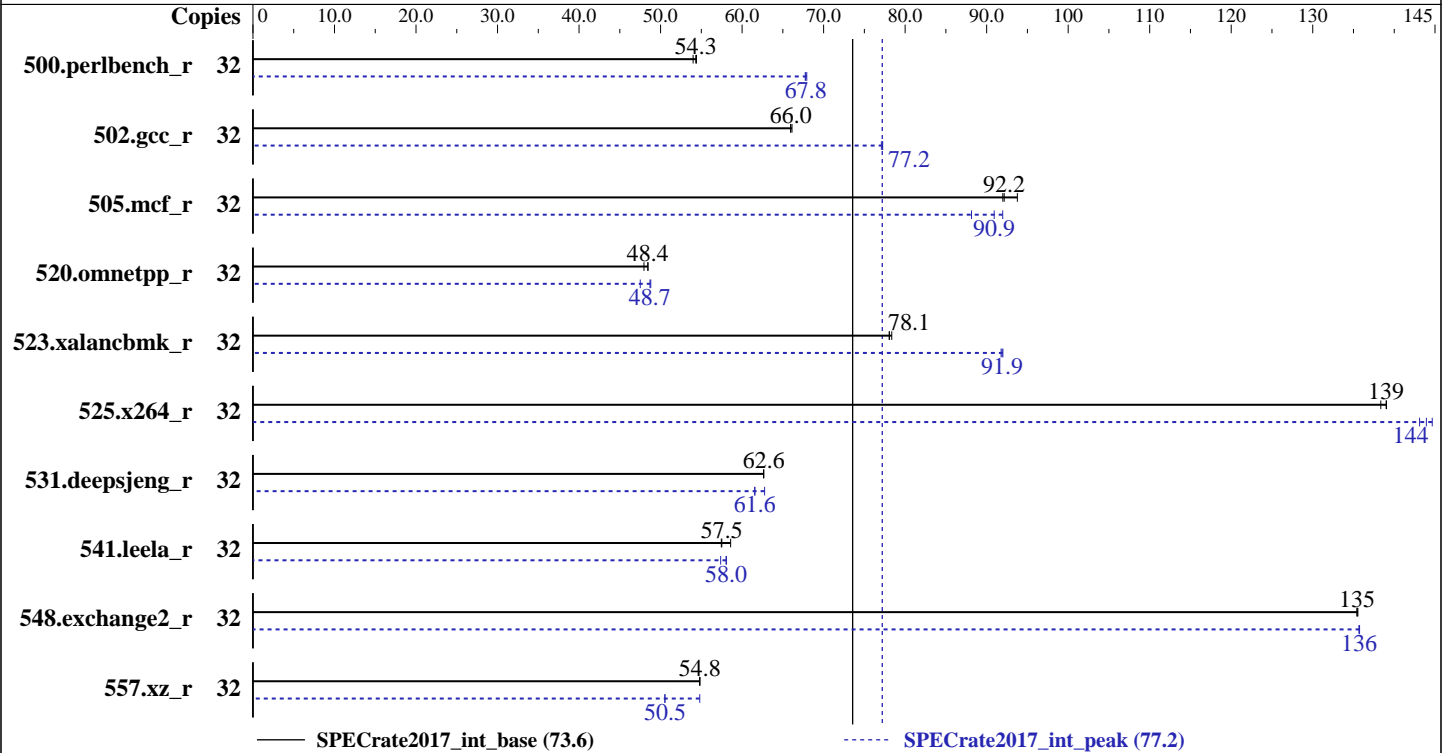

Hardware

CPU Name: Intel Xeon Silver 4110
 Max MHz.: 3000
 Nominal: 2100
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
 Storage: 1 x 800 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
 Kernel 4.4.73-5-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version TEE119J 1.20 released Sep-2017
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1;
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
 jemalloc: sources available from jemalloc.net or releases



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 73.6

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	936	54.4	944	54.0	938	54.3	32	752	67.7	750	67.9	751	67.8
502.gcc_r	32	687	66.0	685	66.1	687	66.0	32	587	77.2	587	77.2	588	77.1
505.mcf_r	32	561	92.2	551	93.8	562	92.0	32	562	92.0	569	90.9	587	88.1
520.omnetpp_r	32	875	48.0	866	48.5	867	48.4	32	862	48.7	860	48.8	884	47.5
523.xalancbmk_r	32	433	78.1	433	78.1	431	78.4	32	367	92.0	368	91.8	368	91.9
525.x264_r	32	405	138	403	139	403	139	32	389	144	392	143	387	145
531.deepsjeng_r	32	585	62.7	586	62.6	585	62.6	32	584	62.8	596	61.5	596	61.6
541.leela_r	32	921	57.5	922	57.5	904	58.6	32	913	58.0	924	57.4	912	58.1
548.exchange2_r	32	619	136	619	135	619	135	32	618	136	618	136	618	136
557.xz_r	32	631	54.8	630	54.8	631	54.8	32	631	54.8	684	50.5	684	50.5

SPECrate2017_int_base = 73.6

SPECrate2017_int_peak = 77.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 73.6

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Nov-2017
Software Availability: Sep-2017

General Notes (Continued)

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance
DCU Streamer Prefetcher set to Disable
MONITORMWAIT set to Enable
XPT Prefetcher set to Enable
Stale AtoS set to Enable
LLC Deadline Alloc set to Disable
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on SR590-1 Fri Jan 5 09:17:30 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
 2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings  : 16
 physical 0: cores 0 1 2 3 4 5 6 7
 physical 1: cores 0 1 2 3 4 5 6 7
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 73.6

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    32
On-line CPU(s) list:      0-31
Thread(s) per core:       2
Core(s) per socket:       8
Socket(s):                 2
NUMA node(s):             2
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                    85
Model name:                Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
Stepping:                  4
CPU MHz:                   2095.077
BogoMIPS:                  4190.15
Virtualization:           VT-x
L1d cache:                 32K
L1i cache:                 32K
L2 cache:                  1024K
L3 cache:                  11264K
NUMA node0 CPU(s):        0-7,16-23
NUMA node1 CPU(s):        8-15,24-31
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 193123 MB
node 0 free: 192622 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 193516 MB
node 1 free: 193135 MB
node distances:
node  0  1
 0:   10  21
 1:   21  10

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 73.6

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      395919828 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux SR590-1 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 5 09:15

SPEC is set to: /home/cpu2017.1.0.2.ic18.0

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs    744G  105G  639G  15% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE119J-1.20]- 09/06/2017

Memory:

```
12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666, configured at 2400
4x NO DIMM NO DIMM
```

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 73.6

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 73.6

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 73.6

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Base Other Flags (Continued)

Fortran benchmarks:
-m64

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 73.6

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR590
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate2017_int_base = 73.6

SPECrate2017_int_peak = 77.2

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-01-04 20:17:29-0500.

Report generated on 2018-10-31 16:47:44 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.