



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro


SuperServer 7049P-TR  
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Mar-2018  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

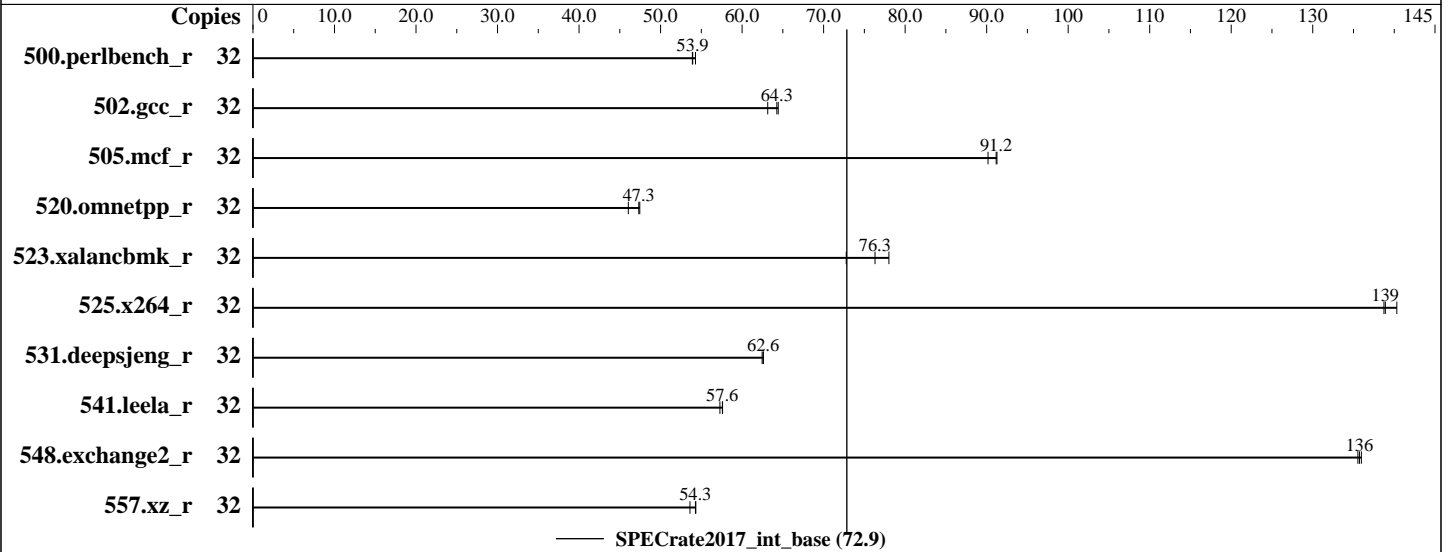

### Hardware

CPU Name: Intel Xeon Silver 4110  
Max MHz.: 3000  
Nominal: 2100  
Enabled: 16 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 11 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
Storage: 1.9 TB SATA 3 SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
4.4.114-92.64-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran  
Compiler for Linux  
Parallel: No  
Firmware: Supermicro BIOS version 2.0b released Feb-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7049P-TR  
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Mar-2018  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	<b>944</b>	<b>53.9</b>	945	53.9	938	54.3							
502.gcc_r	32	718	63.1	703	64.4	<b>705</b>	<b>64.3</b>							
505.mcf_r	32	573	90.2	<b>567</b>	<b>91.2</b>	567	91.3							
520.omnetpp_r	32	912	46.0	885	47.5	<b>887</b>	<b>47.3</b>							
523.xalancbmk_r	32	464	72.8	<b>443</b>	<b>76.3</b>	433	78.0							
525.x264_r	32	404	139	<b>403</b>	<b>139</b>	399	140							
531.deepsjeng_r	32	587	62.5	<b>586</b>	<b>62.6</b>	586	62.6							
541.leela_r	32	920	57.6	925	57.3	<b>920</b>	<b>57.6</b>							
548.exchange2_r	32	619	136	617	136	<b>618</b>	<b>136</b>							
557.xz_r	32	645	53.6	636	54.3	<b>637</b>	<b>54.3</b>							

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2k17/lib/ia32:/home/cpu2k17/lib/intel64:/home/cpu2k17/je5.0.1-32:/home/cpu2k17/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7049P-TR  
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

### General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:  
CPU Virtualization = Disable  
SNC = Enable  
Stale AtoS = Enable  
LLC dead line alloc = Disable  
IMC Interleaving = 1-way Interleave  
Patrol Scrub = Disable  
Sysinfo program /home/cpu2k17/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-itxo Thu Mar 8 18:54:01 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 32  
On-line CPU(s) list: 0-31  
Thread(s) per core: 2  
Core(s) per socket: 8

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7049P-TR  
(X11DPI-N, Intel Xeon Silver 4110)

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             2
Vendor ID:                GenuineIntel
CPU family:               6
Model:                    85
Model name:               Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
Stepping:                 4
CPU MHz:                  800.000
CPU max MHz:              2101.0000
CPU min MHz:              800.0000
BogoMIPS:                 4200.01
Virtualization:          VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 11264K
NUMA node0 CPU(s):       0-7,16-23
NUMA node1 CPU(s):       8-15,24-31

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 193043 MB
node 0 free: 192552 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 193518 MB
node 1 free: 193119 MB
node distances:
node    0    1
 0:    10    21
 1:    21    10

```

From /proc/meminfo

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7049P-TR  
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

MemTotal: 395840084 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-itxo 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 8 18:51 last=5
```

```
SPEC is set to: /home/cpu2k17
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   1.8T   34G  1.7T   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 2.0b 02/28/2018
Memory:
12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666, configured at 2400
4x NO DIMM NO DIMM
```

(End of data from sysinfo program)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7049P-TR  
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7049P-TR  
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Mar-2018  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Base Portability Flags (Continued)

541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revB.xml>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7049P-TR  
(X11DPi-N, Intel Xeon Silver 4110)

SPECrate2017\_int\_base = 72.9

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Mar-2018

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-03-08 21:54:00-0500.

Report generated on 2018-10-31 17:41:47 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-03.