



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro


SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Silver 4114)

SPECspeed2017_fp_base = 37.4

SPECspeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

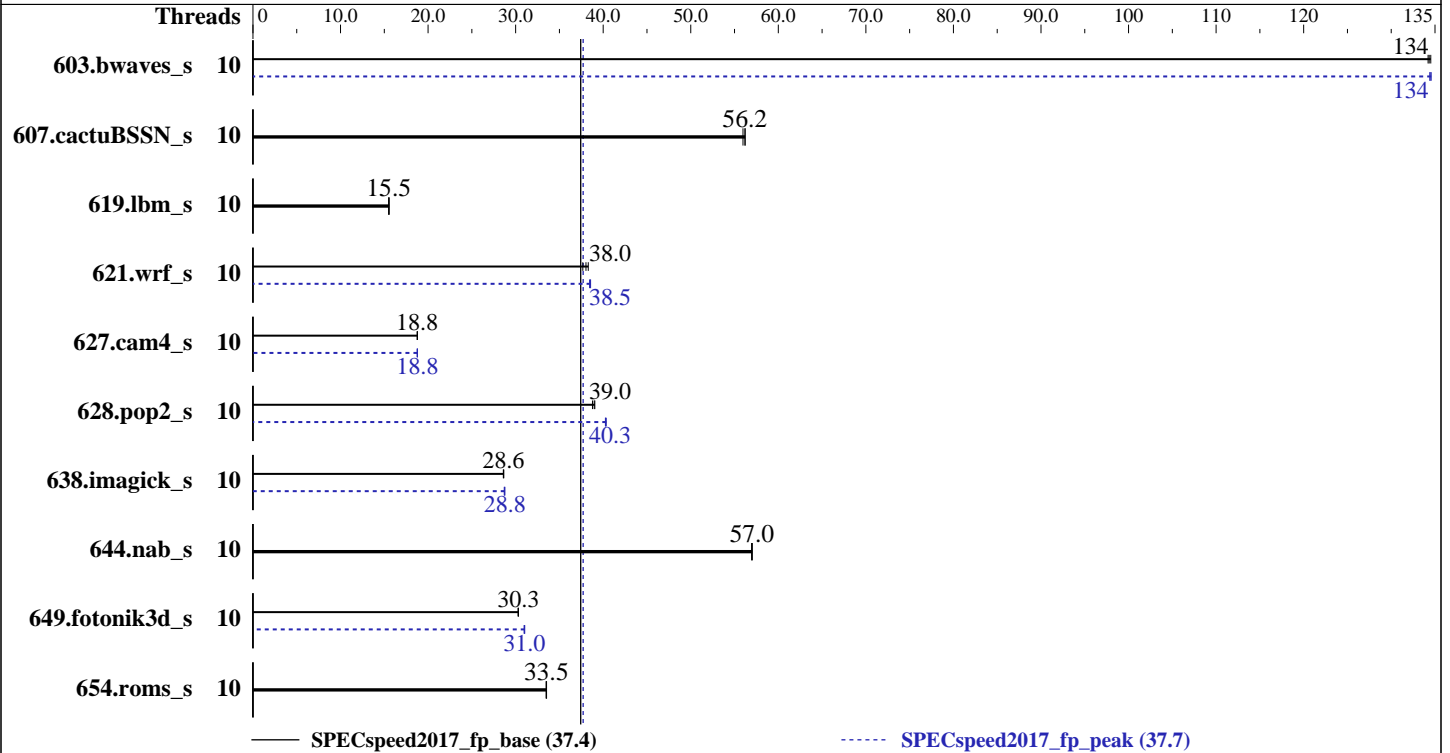

Hardware

CPU Name: Intel Xeon Silver 4114
Max MHz.: 3000
Nominal: 2200
Enabled: 10 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 13.75 MB I+D on chip per chip
Other: None
Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R,
running at 2400)
Storage: 1 x 2 TB NVMe SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
Kernel 4.4.114-94.11-default
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.2.199 of Intel Fortran
Compiler for Linux
Parallel: Yes
Firmware: Supermicro BIOS version 2.1 released Jun-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Silver 4114)

SPECSpeed2017_fp_base = 37.4

SPECSpeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	10	439	135	440	134	439	134	10	439	134	438	135	439	134
607.cactuBSSN_s	10	297	56.2	298	56.0	297	56.2	10	297	56.2	298	56.0	297	56.2
619.lbm_s	10	338	15.5	338	15.5	337	15.6	10	338	15.5	338	15.5	337	15.6
621.wrf_s	10	345	38.3	348	38.0	351	37.7	10	343	38.6	344	38.4	343	38.5
627.cam4_s	10	472	18.8	472	18.8	472	18.8	10	472	18.8	472	18.8	473	18.8
628.pop2_s	10	304	39.0	306	38.8	305	39.0	10	295	40.3	294	40.4	295	40.3
638.imagick_s	10	505	28.6	504	28.6	504	28.6	10	503	28.7	502	28.8	502	28.8
644.nab_s	10	306	57.0	307	56.9	306	57.0	10	306	57.0	307	56.9	306	57.0
649.fotonik3d_s	10	301	30.3	301	30.3	301	30.3	10	294	31.0	294	31.0	294	31.0
654.roms_s	10	470	33.5	470	33.5	470	33.5	10	470	33.5	470	33.5	470	33.5

SPECSpeed2017_fp_base = 37.4

SPECSpeed2017_fp_peak = 37.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: jemalloc, a general purpose malloc implementation;

jemalloc: built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>;

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Silver 4114)

SPECspeed2017_fp_base = 37.4

SPECspeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes

BIOS Settings:

Hyper-Threading = Disable
LLC prefetch = Enable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
Hardware P-state = Out of Band Mode
XPT Prefetch = Enable
Stale AtoS = Enable
LLC dead line alloc = Disable
SDDC Plus One = Disable
ADDDC Sparing = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-liai Thu Jun 21 00:02:27 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
 1 "physical id"s (chips)
 10 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10
siblings : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 10
On-line CPU(s) list:   0-9
Thread(s) per core:    1
Core(s) per socket:    10
Socket(s):              1
NUMA node(s):          1
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
Stepping:               4
CPU MHz:                2199.999
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Silver 4114)

SPECspeed2017_fp_base = 37.4

SPECspeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```

BogoMIPS:          4399.99
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          14080K
NUMA node0 CPU(s): 0-9
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 14080 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9
node 0 size: 191881 MB
node 0 free: 184207 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo
MemTotal:          196486884 kB
HugePages_Total:   0
Hugepagesize:      2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Silver 4114)

SPECspeed2017_fp_base = 37.4

SPECspeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-liai 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 20 17:19
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   1.8T   56G  1.8T   4% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 2.1 06/11/2018
Memory:
2x NO DIMM NO DIMM
6x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)  
=====
```

```
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

```
=====  
CC 619.lbm_s(peak)  
=====
```

```
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Silver 4114)

SPECspeed2017_fp_base = 37.4

SPECspeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

FC 607.cactuBSSN_s(base, peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base, peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF,
Intel Xeon Silver 4114)

SPECspeed2017_fp_base = 37.4

SPECspeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64  
607.cactuBSSN_s: -DSPEC_LP64  
619.lbm_s: -DSPEC_LP64  
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG  
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
-assume byterecl  
638.imagick_s: -DSPEC_LP64  
644.nab_s: -DSPEC_LP64  
649.fotonik3d_s: -DSPEC_LP64  
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Silver 4114)

SPECspeed2017_fp_base = 37.4

SPECspeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP
```

```
644.nab_s: basepeak = yes
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Silver 4114)

SPECspeed2017_fp_base = 37.4

SPECspeed2017_fp_peak = 37.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Peak Optimization Flags (Continued)

603.bwaves_s (continued):

-qopenmp -nostandard-realloc-lhs

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-20 12:02:27-0400.

Report generated on 2018-10-31 18:51:41 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-10.