



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265

SPECrate2017_fp_peak = 276

CPU2017 License: 4872


Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

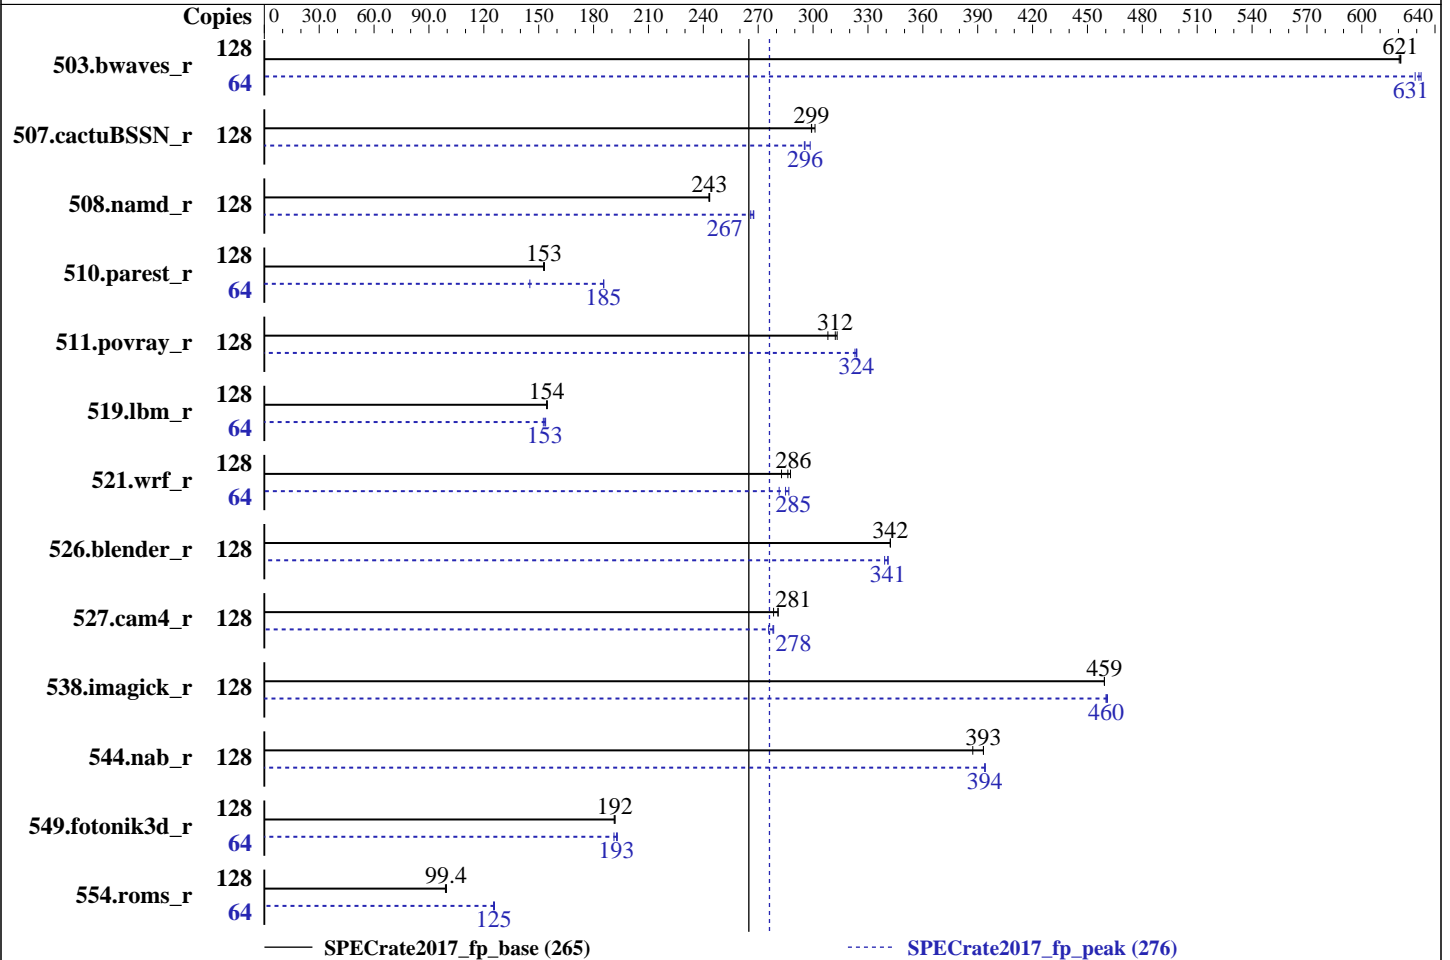

Hardware

CPU Name: AMD EPYC 7601
 Max MHz.: 3200
 Nominal: 2200
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2667V-L)

Storage: 1 x 2 TB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64) kernel 4.4.73-5-default

Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC

Parallel: No
 Firmware: Version F07 released Jun-2018
 File System: xfs
 System State: Run Level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc general malloc implementation V4.5.0



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265
SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	2066	621	2066	621	2069	620	64	1017	631	1015	632	1020	629
507.cactuBSSN_r	128	542	299	542	299	538	301	128	548	296	543	298	549	295
508.namd_r	128	499	243	500	243	500	243	128	457	266	454	268	455	267
510.parest_r	128	2187	153	2194	153	2187	153	64	903	185	1153	145	902	186
511.povray_r	128	958	312	970	308	954	313	128	926	323	923	324	923	324
519.lbm_r	128	874	154	874	154	872	155	64	439	154	442	153	440	153
521.wrf_r	128	1014	283	997	288	1002	286	64	503	285	509	281	500	287
526.blender_r	128	570	342	570	342	570	342	128	572	341	572	341	575	339
527.cam4_r	128	797	281	797	281	804	278	128	804	278	812	276	805	278
538.imagick_r	128	693	459	693	459	693	459	128	691	461	692	460	692	460
544.nab_r	128	548	393	556	387	548	393	128	547	394	547	394	547	394
549.fotonik3d_r	128	2603	192	2602	192	2608	191	64	1305	191	1295	193	1292	193
554.roms_r	128	2054	99.0	2043	99.5	2045	99.4	64	808	126	810	125	811	125

SPECrate2017_fp_base = 265

SPECrate2017_fp_peak = 276

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).
Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265
SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/amd/CPU2017/amd1704-rate-libs-revC/64;/home/amd/CPU2017/amd1704-rate-libs-revC/32:"
MALLOC_CONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

Sysinfo program /home/amd/CPU2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-qb43 Fri Jun 22 21:19:54 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7601 32-Core Processor

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate2017_fp_base = 265

R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

Platform Notes (Continued)

```

2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7601 32-Core Processor
Stepping:               2
CPU MHz:                2200.000
CPU max MHz:            2200.0000
CPU min MHz:            1200.0000
BogoMIPS:               4400.22
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-7,64-71
NUMA node1 CPU(s):     8-15,72-79
NUMA node2 CPU(s):     16-23,80-87
NUMA node3 CPU(s):     24-31,88-95
NUMA node4 CPU(s):     32-39,96-103
NUMA node5 CPU(s):     40-47,104-111
NUMA node6 CPU(s):     48-55,112-119
NUMA node7 CPU(s):     56-63,120-127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate2017_fp_base = 265

R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

Platform Notes (Continued)

hw_pstate npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold vmmcall avic fsgsbase bml1 avx2 smep bmi2 rdseed adx smap
clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128896 MB
node 0 free: 128599 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 129021 MB
node 1 free: 128802 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 129021 MB
node 2 free: 128793 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 129021 MB
node 3 free: 128802 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 129021 MB
node 4 free: 128806 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 129021 MB
node 5 free: 128805 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 129021 MB
node 6 free: 128809 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 116924 MB
node 7 free: 116706 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 16 16 16 32 32 32 32
 1:  16 10 16 16 32 32 32 32
 2:  16 16 10 16 32 32 32 32
 3:  16 16 16 10 32 32 32 32
 4:  32 32 32 32 10 16 16 16
 5:  32 32 32 32 16 10 16 16
 6:  32 32 32 32 16 16 10 16
 7:  32 32 32 32 16 16 16 10
```

```
From /proc/meminfo
MemTotal: 1044426228 kB
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265
SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 3

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION_ID="12.3"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-qb43 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Jun 19 13:54

SPEC is set to: /home/amd/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xfs	1.8T	4.7G	1.8T	1%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS GIGABYTE F07 06/13/2018

Memory:

16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

16x Unknown Unknown

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265
SPECrate2017_fp_peak = 276

CPU2017 License: 4872
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018
Hardware Availability: Mar-2018
Software Availability: Jun-2018

Compiler Version Notes (Continued)

AOCC.LLVM.4.0.0.B35.2017_04_26
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)

=====
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 511.povray_r(base, peak) 526.blender_r(base, peak)

=====
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 507.cactuBSSN_r(base, peak)

=====
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265
SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

Compiler Version Notes (Continued)

You may redistribute copies of GNU Fortran under the terms of the GNU General Public License. For more information about these matters, see the file named COPYING

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran under the terms of the GNU General Public License. For more information about these matters, see the file named COPYING

CC 521.wrf_r(base, peak) 527.cam4_r(base, peak)

GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran under the terms of the GNU General Public License. For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265

SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc

Fortran benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265

SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays
-mno-avx2 -inline-threshold=1000 -O3(gfortran) -mavx -madox
-funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays
-mno-avx2 -inline-threshold=1000 -finline-aggressive -O3(gfortran)
-mavx -madox -funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265

SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
clang++ clang gfortran
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-O3(gfortran) -O3(clang) -mavx2 -madox -funroll-loops -ffast-math  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -O3(clang) -mavx -ffast-math  
-O3(gfortran) -funroll-loops -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2  
-madox -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
R281-Z92
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_fp_base = 265
SPECrate2017_fp_peak = 276

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jun-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -O3 -mavx2 -madox -funroll-loops -ffast-math  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-22 09:19:53-0400.

Report generated on 2019-02-21 17:33:22 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-24.