



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_base = 163

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Sep-2017

Software Availability: May-2018

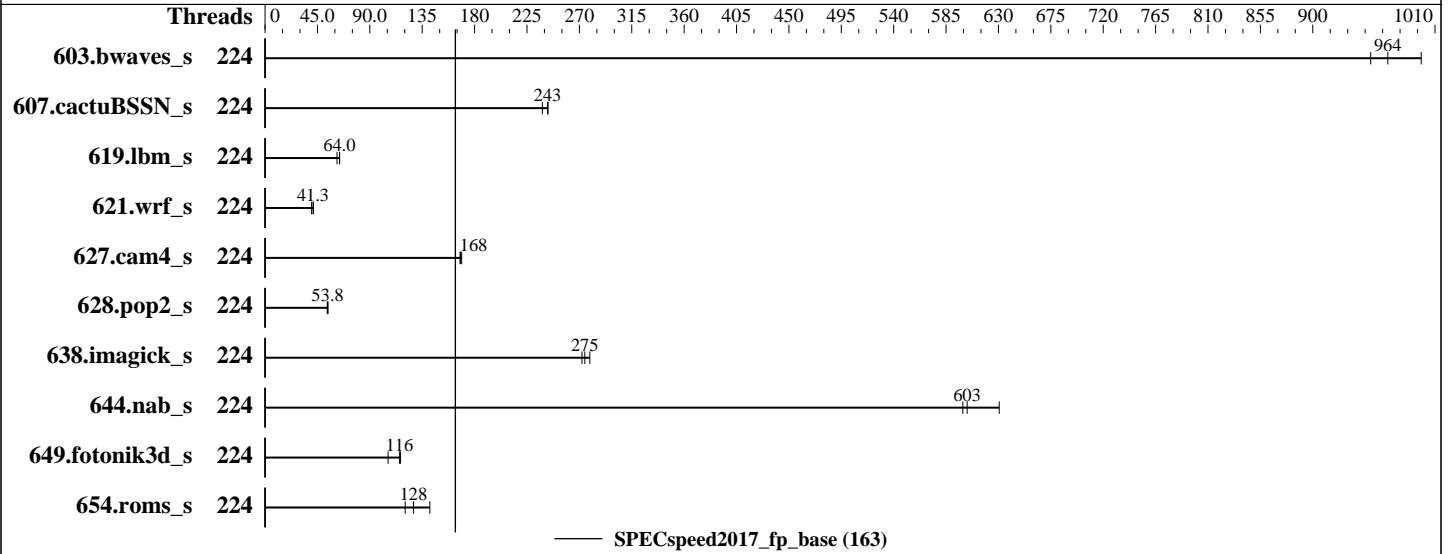

Hardware

CPU Name: Intel Xeon Platinum 8180M
 Max MHz.: 3800
 Nominal: 2500
 Enabled: 224 cores, 8 chips
 Orderable: 2,3,4,6,8 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 800 GB SAS SSD
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)
 3.10.0-862.3.2.el7.x86_64
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Lenovo BIOS Version PSE113P 1.30 released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_base = 163

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2018
Hardware Availability: Sep-2017
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	224	61.2	964	59.4	993	62.1	950							
607.cactuBSSN_s	224	70.0	238	68.7	243	68.6	243							
619.lbm_s	224	81.8	64.0	84.7	61.8	81.8	64.0							
621.wrf_s	224	320	41.3	331	40.0	319	41.5							
627.cam4_s	224	52.5	169	52.9	168	52.9	168							
628.pop2_s	224	222	53.4	221	53.8	220	54.0							
638.imagick_s	224	51.7	279	52.5	275	53.0	272							
644.nab_s	224	29.1	599	29.0	603	27.7	631							
649.fotonik3d_s	224	86.3	106	78.3	116	78.9	116							
654.roms_s	224	111	142	123	128	131	120							

SPECspeed2017_fp_base = 163

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic18.0u2/lib/ia32:/home/cpu2017-1.0.5-ic18.0u2/lib/intel64"

LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-32:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 163

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2018
Hardware Availability: Sep-2017
Software Availability: May-2018

Platform Notes

BIOS configuration:

Choose Operating Mode set to Max Performance
Choose Operating Mode set to Custom Mode
C-States set to Legacy
Hyper-Threading set to Disable
Hardware Prefetcher set to Disable
Intel Virtualization Technology set to Disable
Uncore Frequency Scaling set to Disable
UPI Prefetcher set to Disable
Stale A to S set to Enable

sysinfo program /home/cpu2017-1.0.5-ic18.0u2/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Tue Jul 24 03:09:52 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
 8 "physical id"s (chips)
224 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 28
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 163

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2018
Hardware Availability: Sep-2017
Software Availability: May-2018

Platform Notes (Continued)

```

CPU(s):                224
On-line CPU(s) list:   0-223
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):              8
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
Stepping:               4
CPU MHz:                2500.000
BogoMIPS:               5000.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0-27
NUMA node1 CPU(s):     28-55
NUMA node2 CPU(s):     56-83
NUMA node3 CPU(s):     84-111
NUMA node4 CPU(s):     112-139
NUMA node5 CPU(s):     140-167
NUMA node6 CPU(s):     168-195
NUMA node7 CPU(s):     196-223
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt mba tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2
smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local ibpb ibrs stibp dtherm ida arat pln pts pku ospke
spec_ctrl intel_stibp ssbd

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 392745 MB
node 0 free: 383926 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 163

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

Platform Notes (Continued)

```

node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 393216 MB
node 1 free: 384402 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 393216 MB
node 2 free: 384575 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 393216 MB
node 3 free: 384499 MB
node 4 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129
130 131 132 133 134 135 136 137 138 139
node 4 size: 393216 MB
node 4 free: 384602 MB
node 5 cpus: 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157
158 159 160 161 162 163 164 165 166 167
node 5 size: 393216 MB
node 5 free: 384551 MB
node 6 cpus: 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185
186 187 188 189 190 191 192 193 194 195
node 6 size: 393216 MB
node 6 free: 384614 MB
node 7 cpus: 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213
214 215 216 217 218 219 220 221 222 223
node 7 size: 393216 MB
node 7 free: 384075 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 21 31 21 21 31 31 31
  1: 21 10 21 31 31 21 31 31
  2: 31 21 10 21 31 31 21 31
  3: 21 31 21 10 31 31 31 21
  4: 21 31 31 31 10 21 21 31
  5: 31 21 31 31 21 10 31 21
  6: 31 31 21 31 21 31 10 21
  7: 31 31 31 21 31 21 21 10

```

From /proc/meminfo

MemTotal: 3170206280 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_base = 163

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2018
Hardware Availability: Sep-2017
Software Availability: May-2018

Platform Notes (Continued)

```
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-862.3.2.el7.x86_64 #1 SMP Tue May 15 18:22:15 EDT
2018 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

run-level 3 Jul 24 03:08

```
SPEC is set to: /home/cpu2017-1.0.5-ic18.0u2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   743G  16G  728G   3% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[PSE113P-1.30]- 06/14/2018
Memory:
96x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 163

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

Compiler Version Notes (Continued)

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 163

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_fp_base = 163

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Sep-2017

Software Availability: May-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-07-23 15:09:51-0400.

Report generated on 2018-10-31 18:11:54 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.