



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Cisco Systems

SPECrate2017\_int\_base = 165

## Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

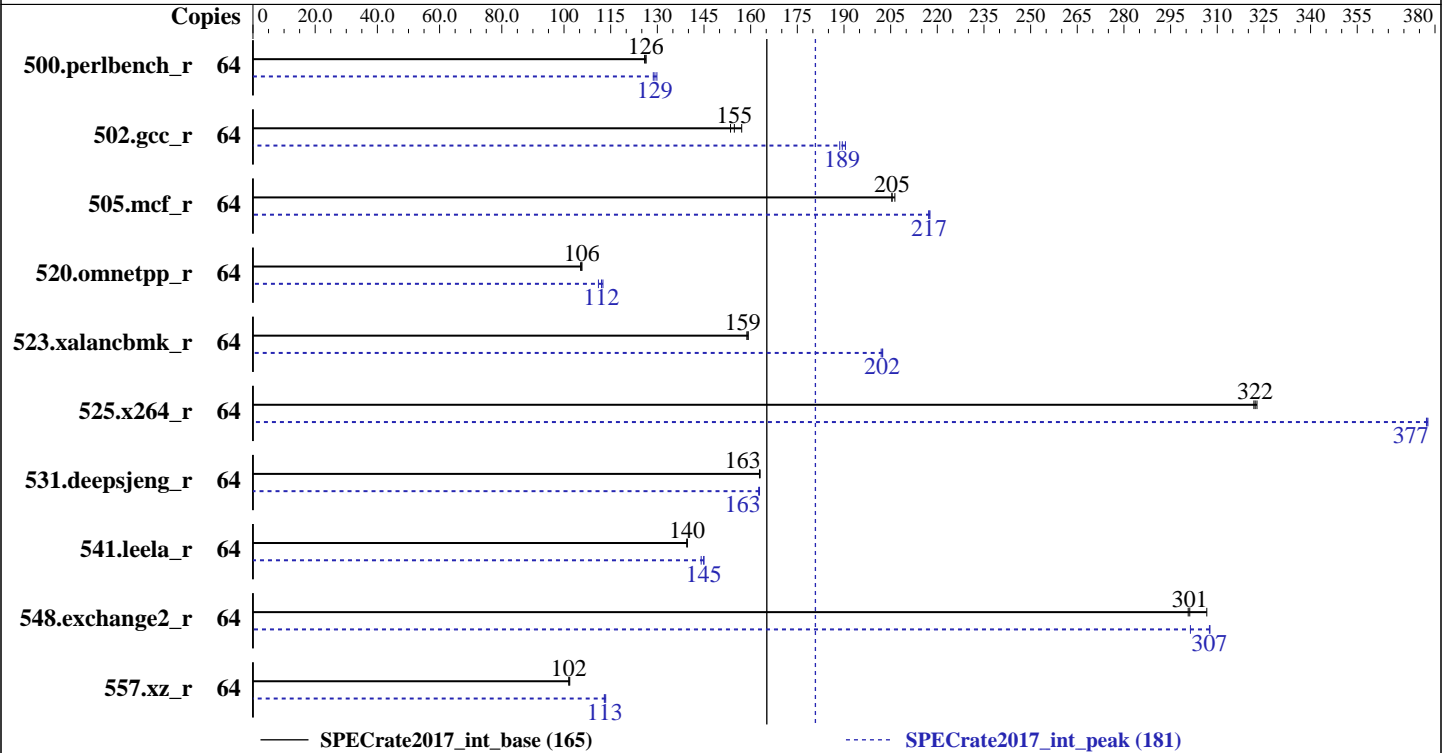

### Hardware

CPU Name: AMD EPYC 7351  
 Max MHz.: 2900  
 Nominal: 2400  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2667V-R)  
 Storage: 600 GB SAS HDD, 15K RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 x86\_64 kernel 4.4.143-94.47-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Cisco Systems, Inc. BIOS Version C125.4.0.0.16.0511180518 released May-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc general purpose malloc implementation v4.5.0



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Cisco Systems

SPECrate2017\_int\_base = 165

## Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jun-2018  
**Hardware Availability:** Aug-2018  
**Software Availability:** Aug-2018

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	806	126	809	126	<b>807</b>	<b>126</b>	64	792	129	<b>788</b>	<b>129</b>	785	130
502.gcc_r	64	<b>586</b>	<b>155</b>	577	157	590	154	64	480	189	476	190	<b>478</b>	<b>189</b>
505.mcf_r	64	501	206	<b>503</b>	<b>205</b>	504	205	64	<b>476</b>	<b>217</b>	476	217	475	218
520.omnetpp_r	64	794	106	797	105	<b>795</b>	<b>106</b>	64	746	113	756	111	<b>749</b>	<b>112</b>
523.xalancbmk_r	64	425	159	426	159	<b>425</b>	<b>159</b>	64	335	202	<b>334</b>	<b>202</b>	334	202
525.x264_r	64	<b>348</b>	<b>322</b>	347	323	348	322	64	297	378	297	377	<b>297</b>	<b>377</b>
531.deepsjeng_r	64	450	163	<b>450</b>	<b>163</b>	450	163	64	451	163	450	163	<b>451</b>	<b>163</b>
541.leela_r	64	760	140	759	140	<b>759</b>	<b>140</b>	64	731	145	<b>731</b>	<b>145</b>	736	144
548.exchange2_r	64	547	307	<b>557</b>	<b>301</b>	558	301	64	556	301	545	308	<b>545</b>	<b>307</b>
557.xz_r	64	681	102	679	102	<b>680</b>	<b>102</b>	64	610	113	<b>611</b>	<b>113</b>	612	113

SPECrate2017\_int\_base = 165

SPECrate2017\_int\_peak = 181

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2018

**Hardware Availability:** Aug-2018

**Software Availability:** Aug-2018

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/opt/cpu2017/amd1704-rate-libs-revC/64;/opt/cpu2017/amd1704-rate-libs-revC/32:"
MALLOCONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>  
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.  
jemalloc uses environment variable MALLOCONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing  
of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers  
with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Performance Determinism set to Power Deterministic  
Sysinfo program /opt/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-7bdx Sat Jan 1 08:43:15 2011

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7351 16-Core Processor
 2 "physical id"s (chips)
64 "processors"
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

CPU2017 License: 9019

Test Date: Jun-2018

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2018

Tested by: Cisco Systems

Software Availability: Aug-2018

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             2
NUMA node(s):         8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7351 16-Core Processor
Stepping:              2
CPU MHz:               2400.000
CPU max MHz:           2400.0000
CPU min MHz:           1200.0000
BogoMIPS:              4790.90
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0-3,32-35
NUMA node1 CPU(s):    4-7,36-39
NUMA node2 CPU(s):    8-11,40-43
NUMA node3 CPU(s):    12-15,44-47
NUMA node4 CPU(s):    16-19,48-51
NUMA node5 CPU(s):    20-23,52-55
NUMA node6 CPU(s):    24-27,56-59
NUMA node7 CPU(s):    28-31,60-63
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpeext perfctr_l2 mwaitx arat
hw_pstate ssbd ibpb retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

CPU2017 License: 9019

Test Date: Jun-2018

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2018

Tested by: Cisco Systems

Software Availability: Aug-2018

## Platform Notes (Continued)

bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha\_ni xsaveopt xsavec xgetbv1 clzero  
irperf overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 128831 MB
node 0 free: 128643 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 129020 MB
node 1 free: 128865 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 129020 MB
node 2 free: 128878 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 129020 MB
node 3 free: 128878 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 129020 MB
node 4 free: 128883 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 129020 MB
node 5 free: 128921 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 129020 MB
node 6 free: 128918 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 116923 MB
node 7 free: 116824 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
0:  10 16 16 16 32 32 32 32
1:  16 10 16 16 32 32 32 32
2:  16 16 10 16 32 32 32 32
3:  16 16 16 10 32 32 32 32
4:  32 32 32 32 10 16 16 16
5:  32 32 32 32 16 10 16 16
6:  32 32 32 32 16 16 10 16
7:  32 32 32 32 16 16 16 10
```

```
From /proc/meminfo
MemTotal: 1044357880 kB
HugePages_Total: 0
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

CPU2017 License: 9019  
Test Sponsor: Cisco Systems  
Tested by: Cisco Systems

Test Date: Jun-2018  
Hardware Availability: Aug-2018  
Software Availability: Aug-2018

## Platform Notes (Continued)

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION\_ID="12.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-7bdx 4.4.143-94.47-default #1 SMP Thu Aug 9 12:47:15 UTC 2018 (6bff971)  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Dec 31 16:26

SPEC is set to: /opt/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xf	450G	20G	431G	5%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C125.4.0.0.16.0511180518 05/11/2018

Memory:

16x 0xCE00 M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 502.gcc\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: i386-unknown-linux-gnu

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

CPU2017 License: 9019  
Test Sponsor: Cisco Systems  
Tested by: Cisco Systems

Test Date: Jun-2018  
Hardware Availability: Aug-2018  
Software Availability: Aug-2018

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 523.xalanbmk\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jun-2018  
**Hardware Availability:** Aug-2018  
**Software Availability:** Aug-2018

## Compiler Version Notes (Continued)

CXXC 541.leela\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
-----

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
clang gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

## Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100  
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs  
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -mavx -madox -funroll-loops -ffast-math  
-z muldefs -Ofast -fdefault-integer-8 -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split  
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

## Peak Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

```
502.gcc_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-D_FILE_OFFSET_BITS=64(*) -ljemalloc
```

```
505.mcf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000
-D_FILE_OFFSET_BITS=64(*) -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_int\_base = 165

Cisco UCS C125 (AMD EPYC 7351)

SPECrate2017\_int\_peak = 181

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

## Peak Optimization Flags (Continued)

531.deepsjeng\_r: Same as 520.omnetpp\_r

```
541.leela_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -O3
-mavx2 -madx -funroll-loops -ffast-math -Ofast -fdefault-integer-8
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

(\*) Indicates an optimization flag that was found in a portability variable.

## Peak Other Flags

C benchmarks:

502.gcc\_r: -L/root/work/lib/jemalloc/lib32

C++ benchmarks:

523.xalancbmk\_r: -L/root/work/lib/jemalloc/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-V1-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-V1-revA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2011-01-01 11:43:14-0500.

Report generated on 2018-10-31 19:15:00 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-02.