



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro


SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

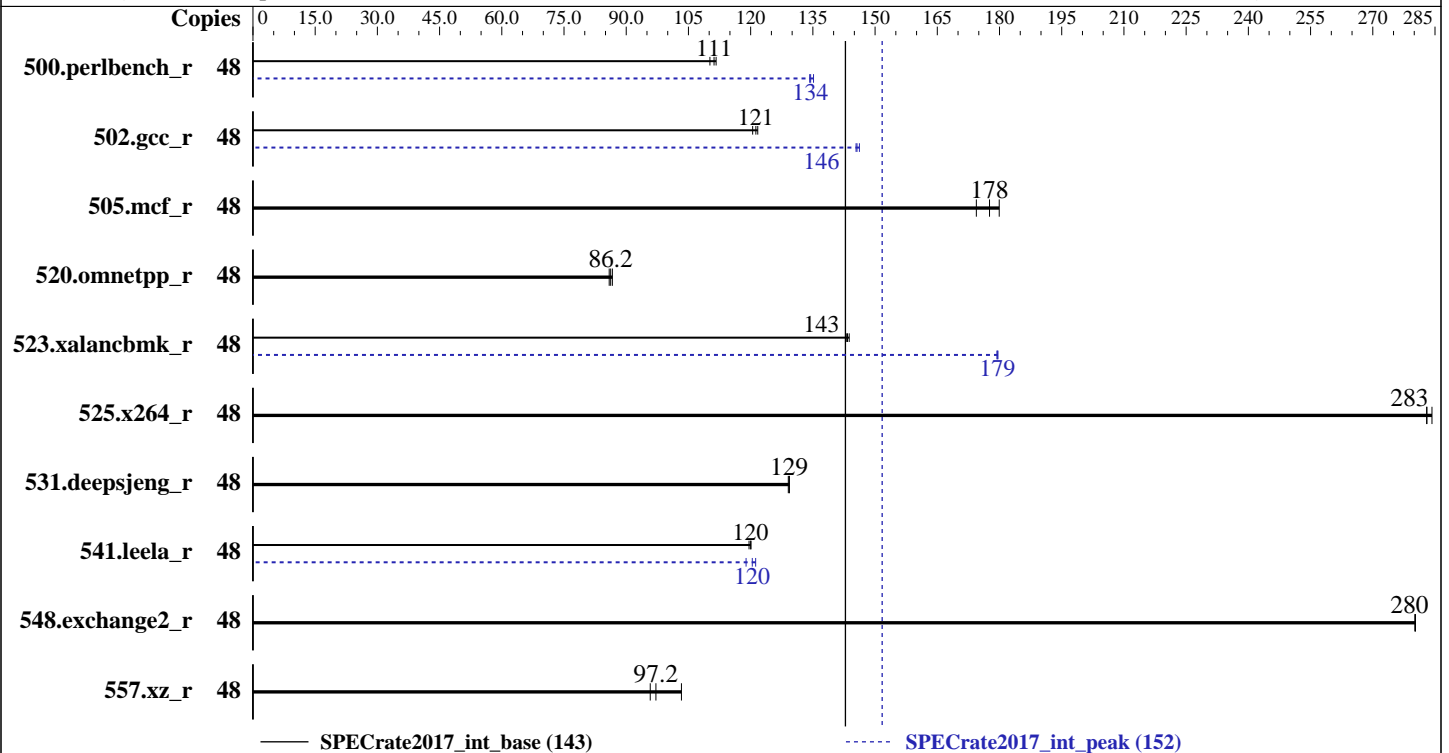

Hardware

CPU Name: Intel Xeon Gold 6126
Max MHz.: 3700
Nominal: 2600
Enabled: 24 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 19.25 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
Kernel 4.4.114-94.11-default
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Supermicro BIOS version 2.1a released Aug-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	684	112	694	110	687	111	48	565	135	569	134	568	134
502.gcc_r	48	558	122	561	121	564	120	48	465	146	467	145	467	146
505.mcf_r	48	431	180	437	178	445	174	48	431	180	437	178	445	174
520.omnetpp_r	48	733	85.9	727	86.7	730	86.2	48	733	85.9	727	86.7	730	86.2
523.xalancbmk_r	48	354	143	354	143	353	144	48	282	179	283	179	282	180
525.x264_r	48	297	283	297	283	296	284	48	297	283	297	283	296	284
531.deepsjeng_r	48	425	129	426	129	425	129	48	425	129	426	129	425	129
541.leela_r	48	662	120	665	120	662	120	48	656	121	669	119	660	120
548.exchange2_r	48	449	280	449	280	449	280	48	449	280	449	280	449	280
557.xz_r	48	502	103	534	97.2	541	95.8	48	502	103	534	97.2	541	95.8

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

LLC prefetch = Enable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
Hardware P-state = Out of Band Mode
LLC dead line alloc = Disable
SDDC Plus One = Disable
ADDDC Sparing = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-ima8 Fri Nov 16 17:44:24 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 6 8 9 11 12 13
  physical 1: cores 1 2 3 4 5 6 8 9 10 11 13 14
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:   0-47
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              2
NUMA node(s):          4
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
Stepping:           4
CPU MHz:            2600.000
BogoMIPS:           5200.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           19712K
NUMA node0 CPU(s): 0-3,7,8,24-27,31,32
NUMA node1 CPU(s): 4-6,9-11,28-30,33-35
NUMA node2 CPU(s): 12-14,18-20,36-38,42-44
NUMA node3 CPU(s): 15-17,21-23,39-41,45-47

```

```

Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 24 25 26 27 31 32
node 0 size: 95332 MB
node 0 free: 95108 MB
node 1 cpus: 4 5 6 9 10 11 28 29 30 33 34 35
node 1 size: 96759 MB
node 1 free: 96482 MB
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
node 2 size: 96759 MB
node 2 free: 96564 MB
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
node 3 size: 96756 MB
node 3 free: 96411 MB
node distances:
node  0  1  2  3

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
0: 10 11 21 21
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal:      394861332 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-ima8 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):      Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Nov 16 17:20

SPEC is set to: /home/cpu2017

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda4        xfs       145G  4.1G  141G   3% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS American Megatrends Inc. 2.1a 08/23/2018

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

Memory:
12x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak) 505.mcf_r(peak) 525.x264_r(peak)
557.xz_r(peak)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalanbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

=====

```
FC 548.exchange2_r(peak)
```

```
ifort (IFORT) 18.0.2 20180210
```

```
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -DSPEC_LP64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Nov-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6126)

SPECrate2017_int_base = 143

SPECrate2017_int_peak = 152

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-11-16 04:44:23-0500.
Report generated on 2018-12-11 14:59:14 by CPU2017 PDF formatter v6067.
Originally published on 2018-12-11.