



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6, 3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

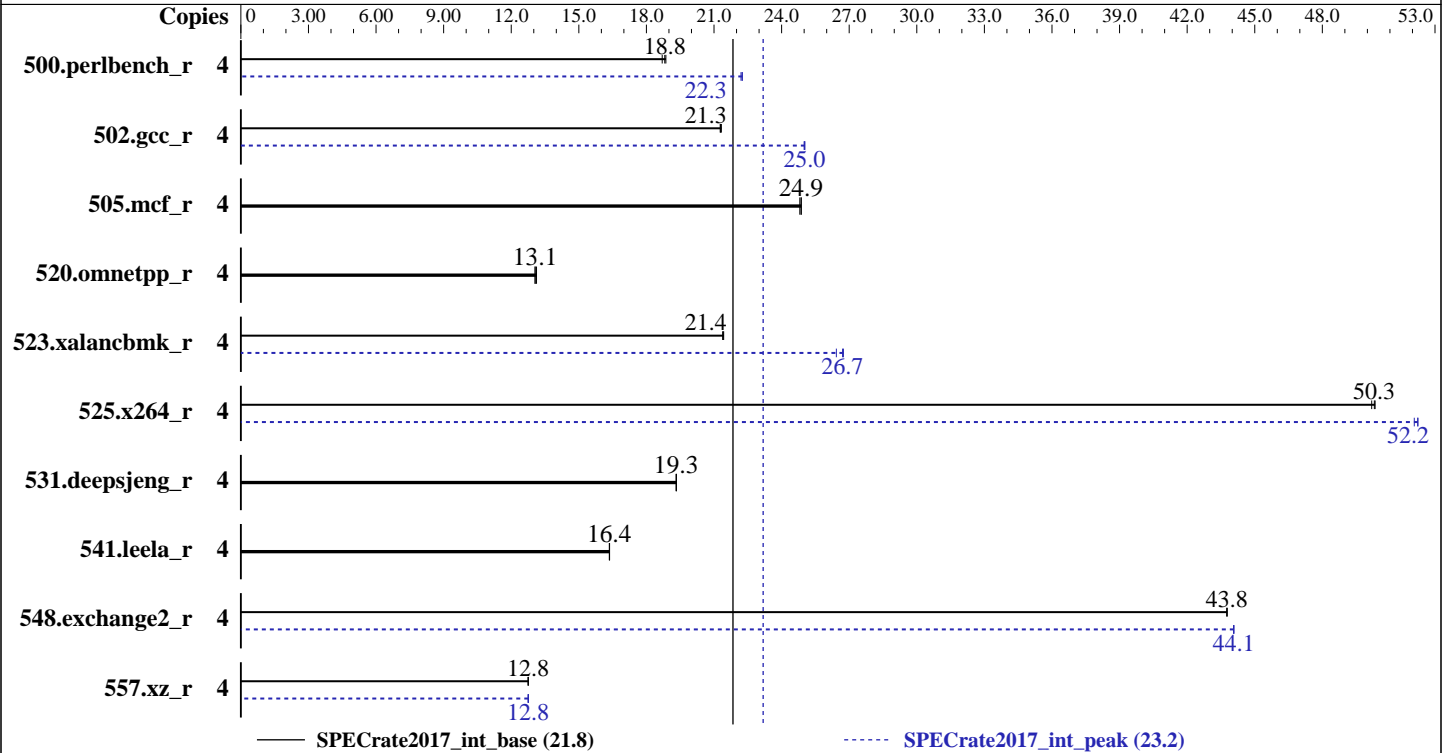

Hardware

CPU Name: Intel Xeon E3-1225 v6
 Max MHz.: 3700
 Nominal: 3300
 Enabled: 4 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 8 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)
 Storage: 1 x SATA HDD, 2TB, 7200RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 15
 4.12.14-23-default
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.11 R1.21.0 for D3373-B1x. Released Nov-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6, 3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: May-2017
Software Availability: Sep-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	4	338	18.9	341	18.7	338	18.8	4	286	22.3	286	22.3	287	22.2
502.gcc_r	4	266	21.3	266	21.3	266	21.3	4	226	25.0	226	25.0	227	25.0
505.mcf_r	4	261	24.8	260	24.9	260	24.9	4	261	24.8	260	24.9	260	24.9
520.omnetpp_r	4	402	13.1	400	13.1	402	13.1	4	402	13.1	400	13.1	402	13.1
523.xalancbmk_r	4	198	21.4	197	21.4	197	21.4	4	158	26.7	158	26.7	160	26.4
525.x264_r	4	140	50.2	139	50.3	139	50.3	4	134	52.2	134	52.1	134	52.2
531.deepsjeng_r	4	237	19.3	237	19.3	237	19.3	4	237	19.3	237	19.3	237	19.3
541.leela_r	4	405	16.4	405	16.4	405	16.4	4	405	16.4	405	16.4	405	16.4
548.exchange2_r	4	239	43.8	239	43.8	239	43.8	4	238	44.1	238	44.1	238	44.1
557.xz_r	4	339	12.8	339	12.8	339	12.8	4	339	12.8	339	12.8	339	12.8

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo always > /sys/kernel/mm/transparent_hugepage/enabled
echo 1 > /proc/sys/vm/drop_caches
echo 1000000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 1500000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/ia32"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/je5.0.1-32"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/je5.0.1-64"

Binaries compiled on a system with 2x Intel Xeon Silver 4108 CPU + 384GB RAM memory using SUSE Linux Enterprise Server 12 SP2
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6, 3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

General Notes (Continued)

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-ic19-20181011/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on TX1330M3 Mon Nov 26 04:41:26 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1225 v6 @ 3.30GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 4

On-line CPU(s) list: 0-3

Thread(s) per core: 1

Core(s) per socket: 4

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6, 3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: May-2017
Software Availability: Sep-2018

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) CPU E3-1225 v6 @ 3.30GHz
Stepping: 9
CPU MHz: 3300.000
CPU max MHz: 3700.0000
CPU min MHz: 800.0000
BogoMIPS: 6624.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 8192K
NUMA node0 CPU(s): 0-3
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
pti tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt xsavec
xgetbv1 xsaves ibpb ibrs stibp dtherm ida arat pln pts hwp hwp_notify hwp_act_window
hwp_epp ssbd

```

```

/proc/cpuinfo cache data
cache size : 8192 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64034 MB
node 0 free: 63550 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 65571408 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6, 3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

Platform Notes (Continued)

```
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux TX1330M3 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b) x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 26 04:35
```

SPEC is set to: /home/Benchmark/speccpu2017-ic19-20181011

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   1.7T   27G  1.7T   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.21.0 for D3373-B1x
11/20/2018
```

```
Memory:
4x Samsung M391A2K43BB1-CRC 16 GB 2 rank 2400
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
525.x264_r(base, peak) 557.xz_r(base, peak)  
-----
```

```
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 500.perlbench_r(peak) 502.gcc_r(peak)  
-----
```

```
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)  
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6, 3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: May-2017
Software Availability: Sep-2018

Compiler Version Notes (Continued)

icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6,
3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: May-2017
Software Availability: Sep-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/opt/intel/compilers_and_libraries_2019/linux/lib/ia32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/opt/intel/compilers_and_libraries_2019/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbenc_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6,
3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: May-2017
Software Availability: Sep-2018

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1225 v6,
3.30GHz

SPECrate2017_int_base = 21.8

SPECrate2017_int_peak = 23.2

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-11-25 14:41:25-0500.

Report generated on 2019-01-08 16:43:15 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-08.