



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu


PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6, 3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2018  
Hardware Availability: May-2017  
Software Availability: Sep-2018

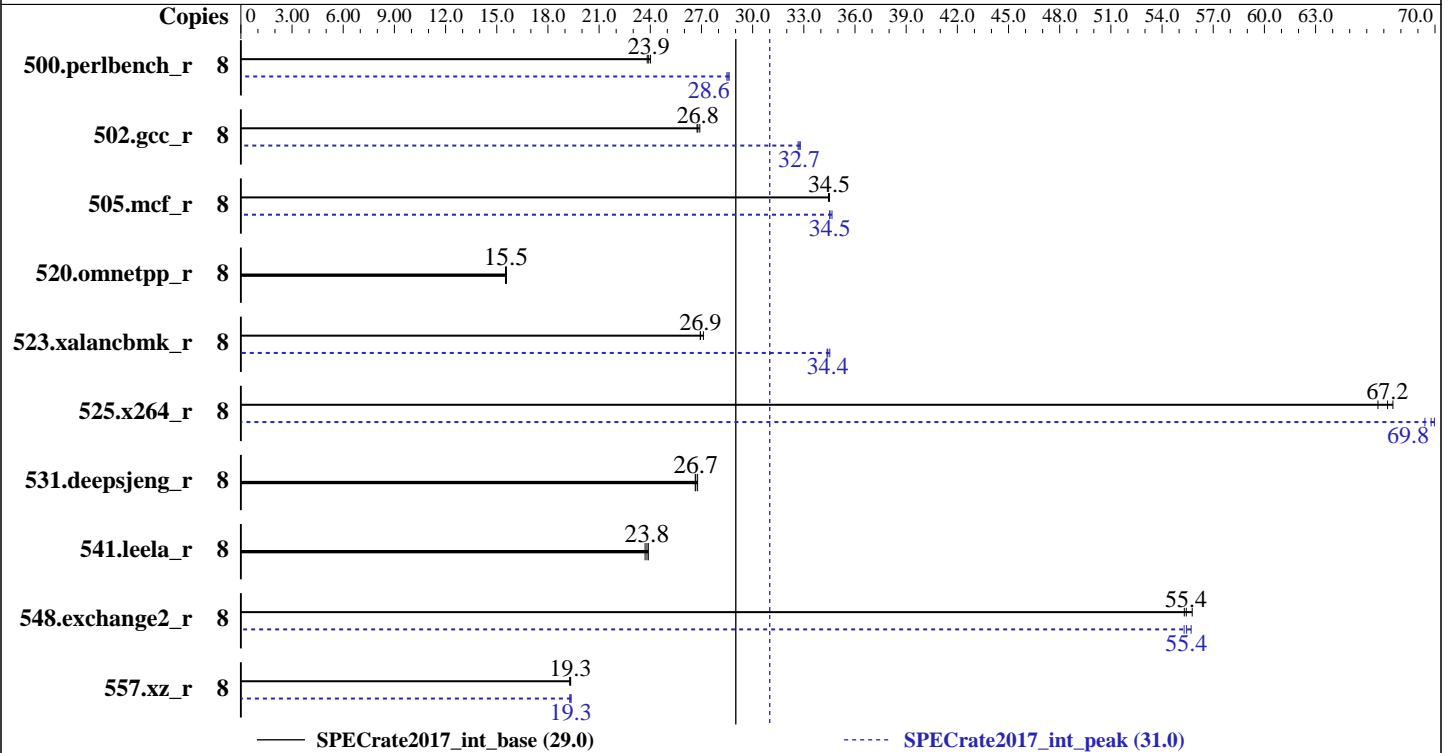

### Hardware

CPU Name: Intel Xeon E3-1270 v6  
Max MHz.: 4200  
Nominal: 3800  
Enabled: 4 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 8 MB I+D on chip per chip  
Other: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)  
Storage: 1 x SATA HDD, 2TB, 7200RPM  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
4.12.14-23-default  
Compiler: C/C++: Version 19.0.0.117 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 19.0.0.117 of Intel Fortran  
Compiler for Linux  
Parallel: No  
Firmware: Fujitsu BIOS Version V5.0.0.11 R1.21.0 for D3373-B1x. Released Nov-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6, 3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2018  
Hardware Availability: May-2017  
Software Availability: Sep-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	8	535	23.8	530	24.0	<b>533</b>	<b>23.9</b>	8	<b>446</b>	<b>28.6</b>	447	28.5	445	28.6
502.gcc_r	8	421	26.9	<b>423</b>	<b>26.8</b>	424	26.7	8	345	32.8	347	32.7	<b>346</b>	<b>32.7</b>
505.mcf_r	8	375	34.5	<b>375</b>	<b>34.5</b>	375	34.4	8	375	34.5	<b>374</b>	<b>34.5</b>	373	34.7
520.omnetpp_r	8	677	15.5	674	15.6	<b>675</b>	<b>15.5</b>	8	677	15.5	674	15.6	<b>675</b>	<b>15.5</b>
523.xalancbmk_r	8	314	26.9	<b>314</b>	<b>26.9</b>	312	27.1	8	245	34.5	<b>246</b>	<b>34.4</b>	246	34.4
525.x264_r	8	<b>208</b>	<b>67.2</b>	207	67.5	210	66.7	8	<b>201</b>	<b>69.8</b>	200	70.0	202	69.4
531.deepsjeng_r	8	<b>344</b>	<b>26.7</b>	344	26.6	342	26.8	8	<b>344</b>	<b>26.7</b>	344	26.6	342	26.8
541.leela_r	8	<b>557</b>	<b>23.8</b>	555	23.9	559	23.7	8	<b>557</b>	<b>23.8</b>	555	23.9	559	23.7
548.exchange2_r	8	379	55.3	376	55.8	<b>378</b>	<b>55.4</b>	8	376	55.7	<b>378</b>	<b>55.4</b>	379	55.3
557.xz_r	8	448	19.3	<b>447</b>	<b>19.3</b>	447	19.3	8	447	19.3	448	19.3	<b>447</b>	<b>19.3</b>

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo always > /sys/kernel/mm/transparent_hugepage/enabled
echo 1 > /proc/sys/vm/drop_caches
echo 1000000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 1500000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/ia32"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/Benchmark/speccpu2017-ic19-20181011/je5.0.1-32"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/Benchmark/speccpu2017-ic19-20181011/je5.0.1-64"

Binaries compiled on a system with 2x Intel Xeon Silver 4108 CPU + 384GB RAM memory using SUSE Linux Enterprise Server 12 SP2  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6, 3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

## General Notes (Continued)

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-ic19-20181011/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on TX1330M3 Fri Nov 30 18:46:10 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1270 v6 @ 3.80GHz

1 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 8

physical 0: cores 0 1 2 3

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 8

On-line CPU(s) list: 0-7

Thread(s) per core: 2

Core(s) per socket: 4

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6, 3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2018  
**Hardware Availability:** May-2017  
**Software Availability:** Sep-2018

### Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) CPU E3-1270 v6 @ 3.80GHz
Stepping: 9
CPU MHz: 3800.000
CPU max MHz: 4200.0000
CPU min MHz: 800.0000
BogoMIPS: 7584.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 8192K
NUMA node0 CPU(s): 0-7
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
pti tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt xsavec
xgetbv1 xsaves ibpb ibrs stibp dtherm ida arat pln pts hwp hwp_notify hwp_act_window
hwp_epp ssbd

```

```

/proc/cpuinfo cache data
cache size : 8192 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 64033 MB
node 0 free: 63542 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 65570528 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6, 3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2018  
Hardware Availability: May-2017  
Software Availability: Sep-2018

### Platform Notes (Continued)

```
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux TX1330M3 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b) x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 30 18:38
```

```
SPEC is set to: /home/Benchmark/speccpu2017-ic19-20181011
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   1.7T   27G  1.7T   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.21.0 for D3373-B1x
11/20/2018
```

```
Memory:
4x Samsung M391A2K43BB1-CRC 16 GB 2 rank 2400
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
```

```
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
-----
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6, 3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2018  
**Hardware Availability:** May-2017  
**Software Availability:** Sep-2018

## Compiler Version Notes (Continued)

-----  
icpc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

ifort (IFORT) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6,  
3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2018  
**Hardware Availability:** May-2017  
**Software Availability:** Sep-2018

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/opt/intel/compilers_and_libraries_2019/linux/lib/ia32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/opt/intel/compilers_and_libraries_2019/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbenc_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6,  
3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Nov-2018

**Hardware Availability:** May-2017

**Software Availability:** Sep-2018

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.xml>





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1270 v6,  
3.80GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Nov-2018

**Hardware Availability:** May-2017

**Software Availability:** Sep-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-11-30 04:46:09-0500.

Report generated on 2019-01-08 16:43:18 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-08.