



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 7.86

## Huawei G530 V5 (Intel Xeon Gold 6140)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175


Test Date: Apr-2019

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Nov-2018

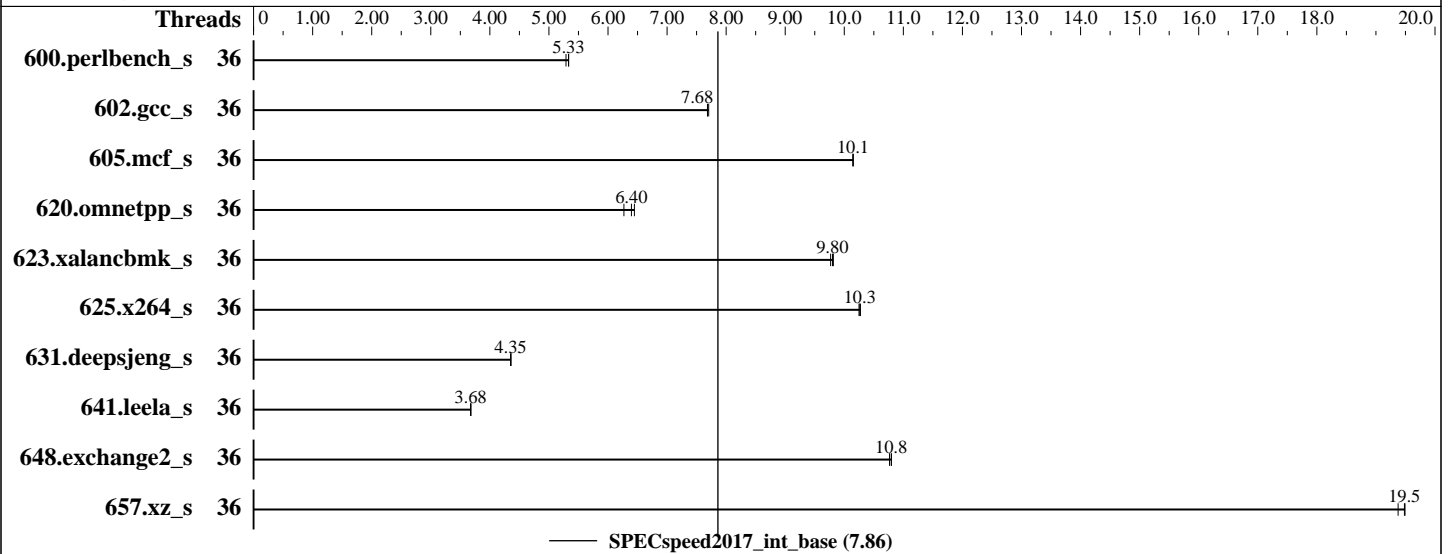

### Hardware

CPU Name: Intel Xeon Gold 6140  
 Max MHz.: 3700  
 Nominal: 2300  
 Enabled: 36 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 1920 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (x86\_64) (Maipo)  
 3.10.0-957.el7.x86\_64  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
 Parallel: Yes  
 Firmware: Version 1.09 Released Jan-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 7.86

## Huawei G530 V5 (Intel Xeon Gold 6140)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Jul-2017  
Software Availability: Nov-2018

### Results Table

| Benchmark       | Base    |                   |                    |                   |                    |                   |                    | Peak    |         |       |         |       |         |       |
|-----------------|---------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|---------|---------|-------|---------|-------|---------|-------|
|                 | Threads | Seconds           | Ratio              | Seconds           | Ratio              | Seconds           | Ratio              | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 36      | 336               | 5.29               | <b><u>333</u></b> | <b><u>5.33</u></b> | 333               | 5.33               |         |         |       |         |       |         |       |
| 602.gcc_s       | 36      | 517               | 7.70               | <b><u>518</u></b> | <b><u>7.68</u></b> | 518               | 7.68               |         |         |       |         |       |         |       |
| 605.mcf_s       | 36      | <b><u>465</u></b> | <b><u>10.1</u></b> | 465               | 10.1               | 465               | 10.2               |         |         |       |         |       |         |       |
| 620.omnetpp_s   | 36      | 260               | 6.27               | 253               | 6.45               | <b><u>255</u></b> | <b><u>6.40</u></b> |         |         |       |         |       |         |       |
| 623.xalancbmk_s | 36      | 145               | 9.77               | <b><u>145</u></b> | <b><u>9.80</u></b> | 144               | 9.82               |         |         |       |         |       |         |       |
| 625.x264_s      | 36      | 172               | 10.2               | <b><u>172</u></b> | <b><u>10.3</u></b> | 172               | 10.3               |         |         |       |         |       |         |       |
| 631.deepsjeng_s | 36      | <b><u>329</u></b> | <b><u>4.35</u></b> | 329               | 4.36               | 329               | 4.35               |         |         |       |         |       |         |       |
| 641.leela_s     | 36      | 464               | 3.67               | 464               | 3.68               | <b><u>464</u></b> | <b><u>3.68</u></b> |         |         |       |         |       |         |       |
| 648.exchange2_s | 36      | 272               | 10.8               | 273               | 10.8               | <b><u>272</u></b> | <b><u>10.8</u></b> |         |         |       |         |       |         |       |
| 657.xz_s        | 36      | 319               | 19.4               | <b><u>317</u></b> | <b><u>19.5</u></b> | 317               | 19.5               |         |         |       |         |       |         |       |

SPECspeed2017\_int\_base = 7.86

SPECspeed2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 7.86

## Huawei G530 V5 (Intel Xeon Gold 6140)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Nov-2018

### Platform Notes

BIOS configuration:  
 Power Policy Set to Load Balance  
 Hyper-Threading Set to Disable  
 XPT Prefetch Set to Enabled  
 Sysinfo program /spec2017/bin/sysinfo  
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
 running on localhost.localdomain Wed Apr 17 10:10:04 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
   2 "physical id"s (chips)
   36 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 18
  siblings    : 18
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 36
On-line CPU(s) list:   0-35
Thread(s) per core:    1
Core(s) per socket:    18
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
Stepping:               4
CPU MHz:                2301.000
CPU max MHz:           2301.0000
CPU min MHz:           1000.0000
BogoMIPS:               4600.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               25344K
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 7.86

## Huawei G530 V5 (Intel Xeon Gold 6140)

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Apr-2019  
**Hardware Availability:** Jul-2017  
**Software Availability:** Nov-2018

### Platform Notes (Continued)

```
NUMA node0 CPU(s):      0-17
NUMA node1 CPU(s):      18-35
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin intel_pt ssbd
mba ibrs ibpb stibp tpr_shadow vmmi flexpriority ept vpid fsgsbase tsc_adjust bml
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb avx512cd avx512bw avx512v1 xsaveopt xsavec xgetbv1 cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
spec_ctrl intel_stibp flush_lld
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
node 0 size: 195187 MB
node 0 free: 190389 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
node 1 size: 196608 MB
node 1 free: 191769 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

```
From /proc/meminfo
MemTotal:      394621960 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 7.86

## Huawei G530 V5 (Intel Xeon Gold 6140)

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Apr-2019  
**Hardware Availability:** Jul-2017  
**Software Availability:** Nov-2018

### Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

```
run-level 3 Apr 17 10:09
```

```
SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   300G  8.2G  292G   3% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS INSYDE Corp. 1.09 01/31/2019
Memory:
12x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)  
657.xz_s(base)
```

```
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)  
641.leela_s(base)
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 7.86

Huawei G530 V5 (Intel Xeon Gold 6140)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Jul-2017  
Software Availability: Nov-2018

## Compiler Version Notes (Continued)

Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 648.exchange2\_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 7.86

Huawei G530 V5 (Intel Xeon Gold 6140)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Nov-2018

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-17 10:10:04-0400.

Report generated on 2019-05-15 13:20:07 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.