



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336

SPECrate2017\_int\_peak = 371

CPU2017 License: 9082


Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

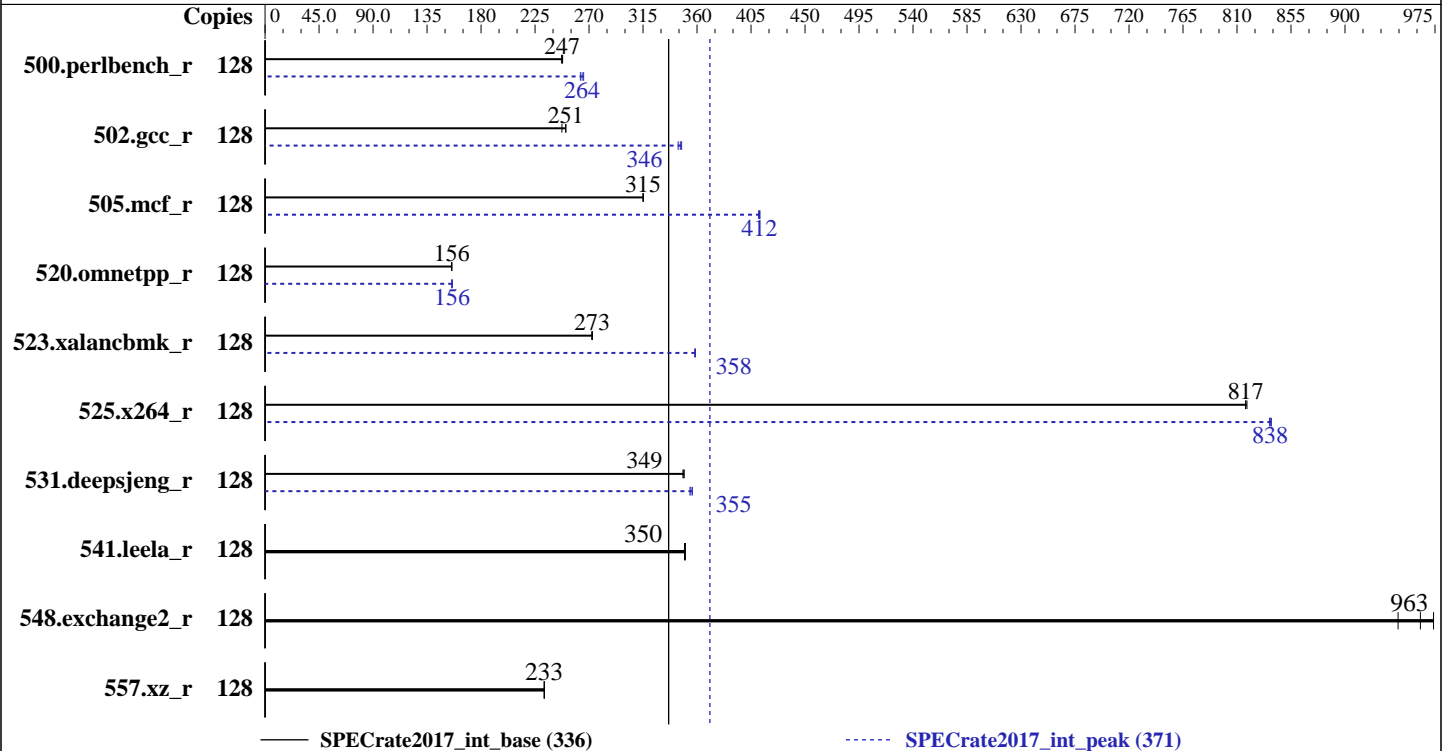

## Hardware

CPU Name: AMD EPYC 7742  
 Max MHz.: 3400  
 Nominal: 2250  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4DRx4 PC4-3200AA-L)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: None

## Software

OS: Ubuntu 19.04 (x86\_64)  
 kernel version 5.0.0-20-generic  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: No  
 Firmware: Version R03b released Jun-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library V5.2.0;



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336  
SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	824	247	<b>823</b>	<b>247</b>	822	248	128	768	265	<b>771</b>	<b>264</b>	776	263
502.gcc_r	128	733	247	723	251	<b>723</b>	<b>251</b>	128	527	344	<b>524</b>	<b>346</b>	522	347
505.mcf_r	128	656	315	657	315	<b>656</b>	<b>315</b>	128	503	411	501	412	<b>502</b>	<b>412</b>
520.omnetpp_r	128	1079	156	<b>1080</b>	<b>156</b>	1081	155	128	1079	156	1077	156	<b>1078</b>	<b>156</b>
523.xalancbmk_r	128	496	272	495	273	<b>496</b>	<b>273</b>	128	377	359	377	358	<b>377</b>	<b>358</b>
525.x264_r	128	274	817	274	818	<b>274</b>	<b>817</b>	128	268	837	<b>268</b>	<b>838</b>	267	839
531.deepsjeng_r	128	<b>420</b>	<b>349</b>	420	349	421	348	128	<b>413</b>	<b>355</b>	414	354	412	356
541.leela_r	128	605	350	<b>606</b>	<b>350</b>	606	350	128	605	350	<b>606</b>	<b>350</b>	606	350
548.exchange2_r	128	344	974	<b>348</b>	<b>963</b>	355	944	128	344	974	<b>348</b>	<b>963</b>	355	944
557.xz_r	128	<b>594</b>	<b>233</b>	594	233	594	233	128	<b>594</b>	<b>233</b>	594	233	594	233

SPECrate2017\_int\_base = 336

SPECrate2017\_int\_peak = 371

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/root/cpu2017/amd\_rate\_aocc200\_rome\_A\_lib/64;/root/cpu2017/amd\_rate\_aocc200\_rome\_A\_lib/32:"

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336

SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## General Notes (Continued)

MALLOC\_CONF = "retain:true"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.2.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:

cTDP = 240

Determinism Slider set to Power

SMT set to auto

IOMMU set to enable

Package Power Limit set to 240

Enforce POR Overclock set to Enable

Memory Clock Speed set to 1600MHz

NUMA nodes per socket set to NPS4

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on test Fri Jul 19 00:53:22 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7742 64-Core Processor

1 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 128

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate2017\_int\_base = 336

R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Platform Notes (Continued)

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59 60 61 62 63

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
Address sizes:       43 bits physical, 48 bits virtual
CPU(s):              128
On-line CPU(s) list: 0-127
Thread(s) per core:  2
Core(s) per socket: 64
Socket(s):           1
NUMA node(s):        4
Vendor ID:           AuthenticAMD
CPU family:          23
Model:               49
Model name:          AMD EPYC 7742 64-Core Processor
Stepping:            0
CPU MHz:             1745.821
CPU max MHz:         2250.0000
CPU min MHz:         1500.0000
BogoMIPS:            4499.70
Virtualization:      AMD-V
L1d cache:           32K
L1i cache:           32K
L2 cache:            512K
L3 cache:            16384K
NUMA node0 CPU(s):  0-15,64-79
NUMA node1 CPU(s):  16-31,80-95
NUMA node2 CPU(s):  32-47,96-111
NUMA node3 CPU(s):  48-63,112-127
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
overflow_recov succor smca

```

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336  
SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79

node 0 size: 257924 MB

node 0 free: 257209 MB

node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95

node 1 size: 258010 MB

node 1 free: 257386 MB

node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111

node 2 size: 258033 MB

node 2 free: 257268 MB

node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127

node 3 size: 258021 MB

node 3 free: 257368 MB

node distances:

```
node  0  1  2  3
0:  10  12  12  12
1:  12  10  12  12
2:  12  12  10  12
3:  12  12  12  10
```

From /proc/meminfo

MemTotal: 1056757220 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Ubuntu 19.04

From /etc/\*release\* /etc/\*version\*

debian\_version: buster/sid

os-release:

NAME="Ubuntu"

VERSION="19.04 (Disco Dingo)"

ID=ubuntu

ID\_LIKE=debian

PRETTY\_NAME="Ubuntu 19.04"

VERSION\_ID="19.04"

HOME\_URL="https://www.ubuntu.com/"

SUPPORT\_URL="https://help.ubuntu.com/"

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336  
SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

uname -a:

```
Linux test 5.0.0-20-generic #21-Ubuntu SMP Mon Jun 24 09:32:09 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: always-on, RSB filling
```

run-level 5 Jul 19 00:40

SPEC is set to: /root/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 1.8T 20G 1.7T 2% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS GIGABYTE R03b 06/25/2019
Memory:
16x Samsung M386A8K40DM2-CWE 64 kB 4 rank 3200
```

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 502.gcc\_r(peak)  
=====

```
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
=====
```

=====  
CXXC 523.xalancbmk\_r(peak)  
=====

```
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: i386-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate2017\_int\_base = 336

R272-Z30

SPECrate2017\_int\_peak = 371

(AMD EPYC 7742, 2.25GHz)

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)

-----  
AOCCLLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B179.2019\_06\_12)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base, peak)

-----  
AOCCLLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B179.2019\_06\_12)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====  
FC 548.exchange2\_r(base, peak)

-----  
AOCCLLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B179.2019\_06\_12)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)

-----  
AOCCLLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B179.2019\_06\_12)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336

SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336

SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336

SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336  
SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: basepeak = yes

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

```
502.gcc_r: -L/sppo/dev/cpu2017/amd_rate_aocc200_rome/amd_rate_aocc200_rome_A_lib/32
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R272-Z30  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_int\_base = 336

SPECrate2017\_int\_peak = 371

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Peak Other Flags (Continued)

C++ benchmarks:

523.xalancbmk\_r: -L/sppo/dev/cpu2017/amd\_rate\_aocc200\_rome/amd\_rate\_aocc200\_rome\_A\_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Rome-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Rome-B.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-18 12:53:21-0400.

Report generated on 2019-08-08 11:12:29 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-08.