



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2049P-TN8R
(X11QPL, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

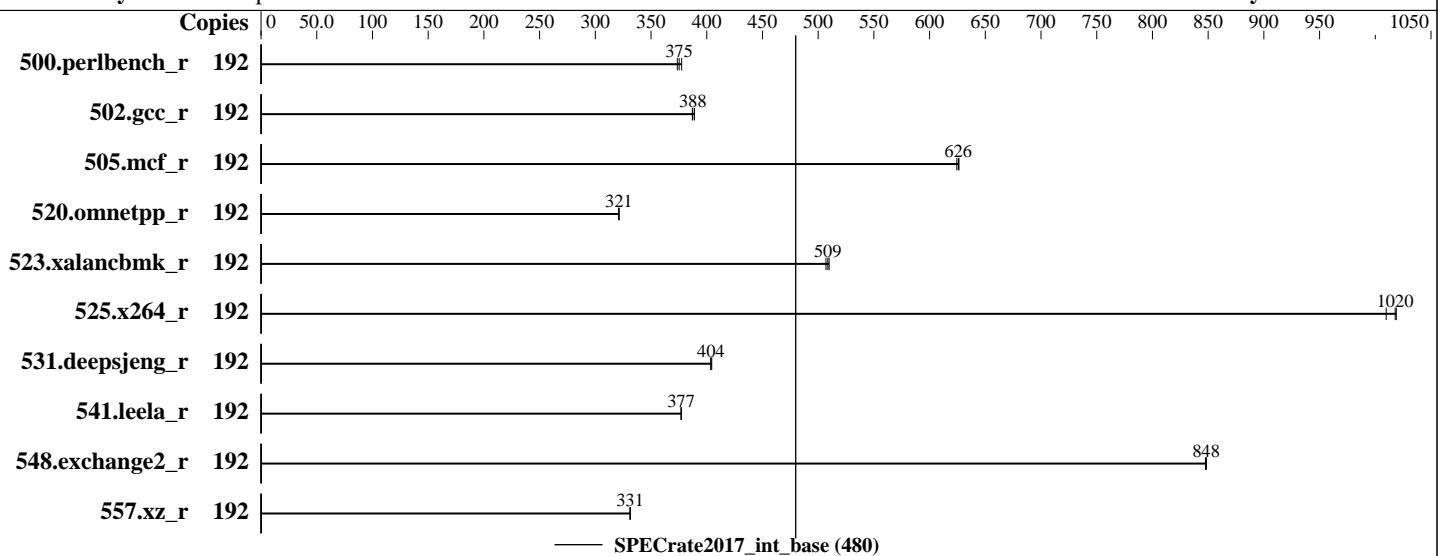

— SPECrate2017_int_base (480)

Hardware

CPU Name: Intel Xeon Gold 6262V
Max MHz.: 3600
Nominal: 1900
Enabled: 96 cores, 4 chips, 2 threads/core
Orderable: 1,2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 33 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)
Storage: 240 GB SATA 3 SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel: No
Firmware: version 3.1 released Jul-2019
File System: xfs
System State: Run level 3 (Multi-user mode with networking)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2049P-TN8R
(X11QPL, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Aug-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Dec-2018

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	815	375	810	377	818	374									
502.gcc_r	192	699	389	702	388	702	387									
505.mcf_r	192	497	624	496	626	495	626									
520.omnetpp_r	192	784	321	784	321	785	321									
523.xalancbmk_r	192	399	509	400	507	398	510									
525.x264_r	192	333	1010	330	1020	330	1020									
531.deepsjeng_r	192	544	404	545	404	545	404									
541.leela_r	192	843	377	843	377	843	377									
548.exchange2_r	192	593	848	593	848	593	848									
557.xz_r	192	626	331	626	331	626	331									

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/CPU2017-1.0.5/lib/ia32:/home/CPU2017-1.0.5/lib/intel64:/home/CPU2017-1.0.5/je5.0.1-32:/home/CPU2017-1.0.5/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2049P-TN8R
(X11QPL, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Aug-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Dec-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Monitor/Mwait = Disabled

ENERGY_PERF_BIAS_CFG mode = Max Performance

ADDDC = Disabled

SNC = Enabled

Stale Atos = Disabled

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disabled

Intel Virtualization Technology = Disabled

Sysinfo program /home/CPU2017-1.0.5/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux Sat Aug 3 02:59:27 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 192

On-line CPU(s) list: 0-191

Thread(s) per core: 2

Core(s) per socket: 24

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2049P-TN8R
(X11QPL, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Aug-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Dec-2018

Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz
Stepping: 7
CPU MHz: 1900.000
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143
NUMA node4 CPU(s): 48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164
NUMA node5 CPU(s): 51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167
NUMA node6 CPU(s): 72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188
NUMA node7 CPU(s): 75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116
node 0 size: 192021 MB
node 0 free: 191561 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118
119

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2049P-TN8R
(X11QPL, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Aug-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Dec-2018

Platform Notes (Continued)

```
node 1 size: 193526 MB
node 1 free: 193290 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134
138 139 140
node 2 size: 193526 MB
node 2 free: 193309 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
141 142 143
node 3 size: 193526 MB
node 3 free: 193309 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158
162 163 164
node 4 size: 193497 MB
node 4 free: 193297 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161
165 166 167
node 5 size: 193526 MB
node 5 free: 193333 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182
186 187 188
node 6 size: 193526 MB
node 6 free: 193325 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185
189 190 191
node 7 size: 193310 MB
node 7 free: 193111 MB
node distances:
node   0   1   2   3   4   5   6   7
 0: 10  11  21  21  21  21  21  21
 1: 11  10  21  21  21  21  21  21
 2: 21  21  10  11  21  21  21  21
 3: 21  21  11  10  21  21  21  21
 4: 21  21  21  21  10  11  21  21
 5: 21  21  21  21  11  10  21  21
 6: 21  21  21  21  21  21  10  11
 7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      1583575352 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4
```

```
From /etc/*release* /etc/*version*
SuSE-release:
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2049P-TN8R
(X11QPL, Intel Xeon Gold 6262V)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Platform Notes (Continued)

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 4

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP4"

VERSION_ID="12.4"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:

Linux linux 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901) x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Aug 3 02:55

SPEC is set to: /home/CPU2017-1.0.5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda7	xfs	142G	99G	44G	70%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.1 07/26/2019

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2049P-TN8R
(X11QPL, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

CPU2017 License: 001176

Test Date: Aug-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Dec-2018

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2049P-TN8R
(X11QPL, Intel Xeon Gold 6262V)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 480

SPECrate2017_int_peak = Not Run

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-08-03 05:59:26-0400.

Report generated on 2019-08-21 12:07:00 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-20.