



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 590

### Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

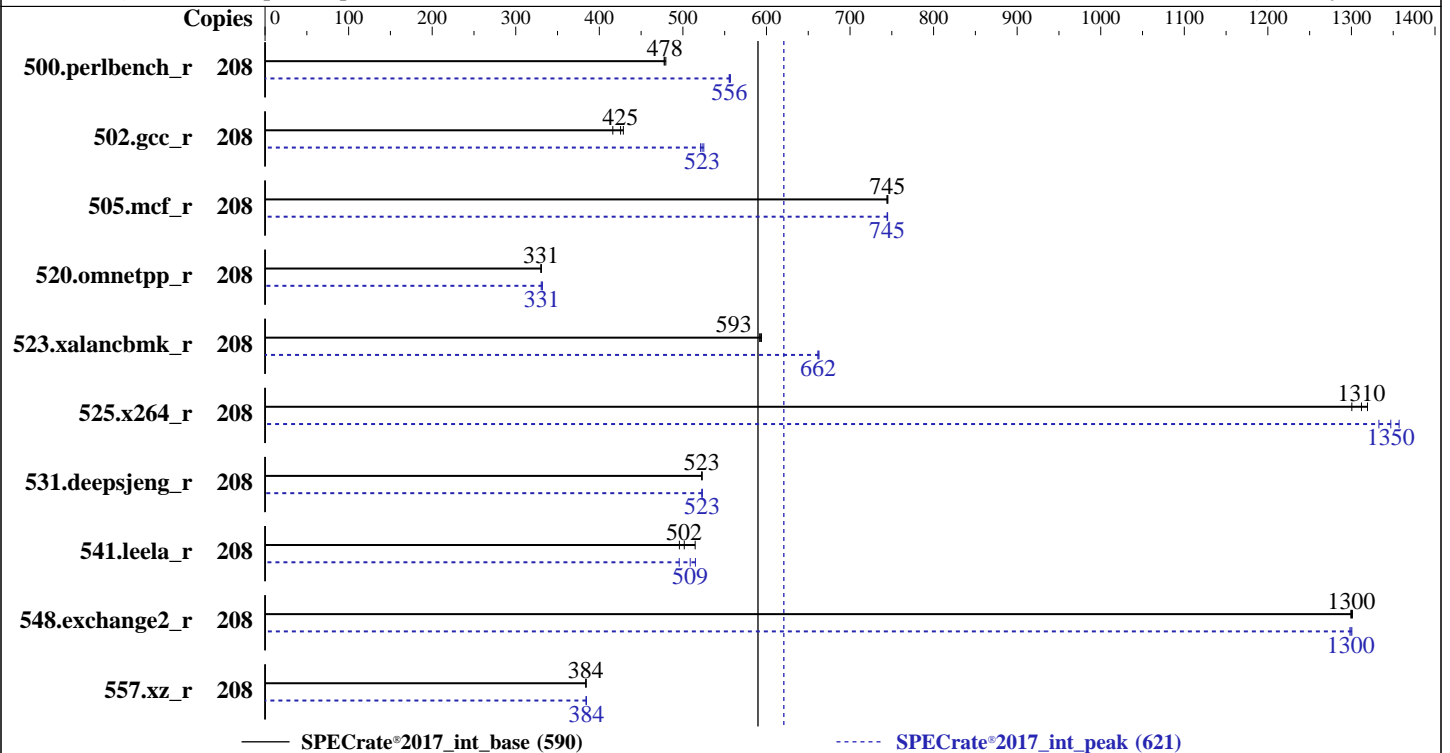

### Hardware

CPU Name: Intel Xeon Platinum 8270  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 104 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4  
 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 4.1.06 released Jul-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	208	693	478	690	480	<b>692</b>	<b>478</b>	208	<b>596</b>	<b>556</b>	596	555	595	557
502.gcc_r	208	687	429	<b>692</b>	<b>425</b>	708	416	208	<b>563</b>	<b>523</b>	561	525	565	521
505.mcf_r	208	<b>451</b>	<b>745</b>	452	744	451	745	208	451	744	<b>451</b>	<b>745</b>	451	745
520.omnetpp_r	208	<b>826</b>	<b>331</b>	825	331	827	330	208	826	330	<b>824</b>	<b>331</b>	822	332
523.xalancbmk_r	208	371	592	<b>371</b>	<b>593</b>	370	594	208	332	662	331	663	<b>332</b>	<b>662</b>
525.x264_r	208	276	1320	<b>278</b>	<b>1310</b>	280	1300	208	<b>270</b>	<b>1350</b>	273	1330	268	1360
531.deepsjeng_r	208	456	523	456	523	<b>456</b>	<b>523</b>	208	456	523	456	523	<b>456</b>	<b>523</b>
541.leela_r	208	<b>687</b>	<b>502</b>	669	515	695	496	208	669	515	695	496	<b>677</b>	<b>509</b>
548.exchange2_r	208	419	1300	419	1300	<b>419</b>	<b>1300</b>	208	420	1300	419	1300	<b>419</b>	<b>1300</b>
557.xz_r	208	585	384	585	384	<b>585</b>	<b>384</b>	208	<b>584</b>	<b>384</b>	584	385	585	384

SPECrate®2017\_int\_base = 590

SPECrate®2017\_int\_peak = 621

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Nov-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS and OS configuration:  
SCALING\_GOVERNOR set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
ClE Support set to Disable  
IMC (Integrated memory controller) Interleaving set to 1-way  
Sub NUMA Cluster (SNC) set to Enable  
Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-aixb Thu Nov 14 04:42:37 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz  
4 "physical id"s (chips)  
208 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 26  
siblings : 52  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Nov-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    208
On-line CPU(s) list:      0-207
Thread(s) per core:       2
Core(s) per socket:       26
Socket(s):                 4
NUMA node(s):             8
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                     85
Model name:                Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
Stepping:                  5
CPU MHz:                   2700.000
CPU max MHz:               4000.0000
CPU min MHz:               1000.0000
BogoMIPS:                  5400.00
Virtualization:            VT-x
L1d cache:                 32K
L1i cache:                 32K
L2 cache:                  1024K
L3 cache:                  36608K
NUMA node0 CPU(s):        0-3,7-9,13-15,20-22,104-107,111-113,117-119,124-126
NUMA node1 CPU(s):        4-6,10-12,16-19,23-25,108-110,114-116,120-123,127-129
NUMA node2 CPU(s):        26-29,33-35,39-41,46-48,130-133,137-139,143-145,150-152
NUMA node3 CPU(s):        30-32,36-38,42-45,49-51,134-136,140-142,146-149,153-155
NUMA node4 CPU(s):        52-55,59-61,65-67,72-74,156-159,163-165,169-171,176-178
NUMA node5 CPU(s):        56-58,62-64,68-71,75-77,160-162,166-168,172-175,179-181
NUMA node6 CPU(s):        78-81,85-87,91-93,98-100,182-185,189-191,195-197,202-204
NUMA node7 CPU(s):        82-84,88-90,94-97,101-103,186-188,192-194,198-201,205-207
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke flush_lld
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Nov-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 104 105 106 107 111 112 113 117 118 119
124 125 126
node 0 size: 95294 MB
node 0 free: 94838 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 108 109 110 114 115 116 120 121 122
123 127 128 129
node 1 size: 96757 MB
node 1 free: 96100 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 130 131 132 133 137 138 139 143 144
145 150 151 152
node 2 size: 96757 MB
node 2 free: 96523 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 134 135 136 140 141 142 146 147 148
149 153 154 155
node 3 size: 96757 MB
node 3 free: 96531 MB
node 4 cpus: 52 53 54 55 59 60 61 65 66 67 72 73 74 156 157 158 159 163 164 165 169 170
171 176 177 178
node 4 size: 96757 MB
node 4 free: 96515 MB
node 5 cpus: 56 57 58 62 63 64 68 69 70 71 75 76 77 160 161 162 166 167 168 172 173 174
175 179 180 181
node 5 size: 96757 MB
node 5 free: 96535 MB
node 6 cpus: 78 79 80 81 85 86 87 91 92 93 98 99 100 182 183 184 185 189 190 191 195
196 197 202 203 204
node 6 size: 96728 MB
node 6 free: 96473 MB
node 7 cpus: 82 83 84 88 89 90 94 95 96 97 101 102 103 186 187 188 192 193 194 198 199
200 201 205 206 207
node 7 size: 96539 MB
node 7 free: 96316 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 11 21 21 21 21 21 21
1:  11 10 21 21 21 21 21 21
2:  21 21 10 11 21 21 21 21
3:  21 21 11 10 21 21 21 21
4:  21 21 21 21 10 11 21 21
5:  21 21 21 21 11 10 21 21
6:  21 21 21 21 21 21 10 11
7:  21 21 21 21 21 21 11 10

```

From /proc/meminfo  
MemTotal: 790888908 kB  
HugePages\_Total: 0

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Nov-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-aixb 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

```
run-level 3 Nov 14 04:41 last=5
```

```
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   889G   93G  797G  11% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Inspur 4.1.06 07/02/2019
Memory:
24x Hynix HMAA4GR7AJR8N-WM 32 GB 2 rank 2933
24x NO DIMM NO DIMM
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Nov-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 523.xalancbmk\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 523.xalancbmk_r(peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran  | 548.exchange2_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r.icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Compiler Invocation (Continued)

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbenc_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbenc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 590

Inspur NF8480M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_int\_peak = 621

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Optimization Flags (Continued)

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.4-CAS.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.4-CAS.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-11-14 04:42:36-0500.

Report generated on 2019-12-10 14:54:48 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-10.