



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 600

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

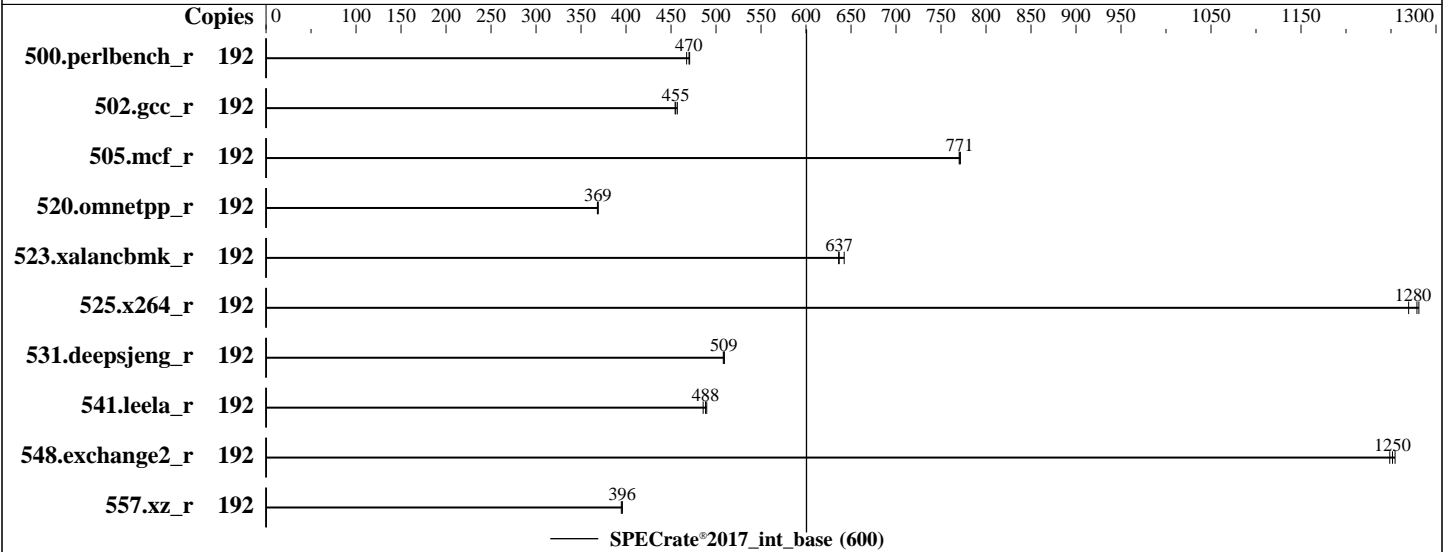

Hardware

CPU Name: Intel Xeon Platinum 8268
 Max MHz: 3900
 Nominal: 2900
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 800 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version TEE142E 2.30 released Aug-2019
 tested as TEE141E 2.30 Jul-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 600

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	650	470	649	471	654	467							
502.gcc_r	192	598	455	595	457	597	455							
505.mcf_r	192	403	771	403	770	402	772							
520.omnetpp_r	192	683	369	684	368	683	369							
523.xalancbmk_r	192	318	637	316	642	319	636							
525.x264_r	192	263	1280	262	1280	265	1270							
531.deepsjeng_r	192	433	508	432	509	432	509							
541.leela_r	192	651	488	649	490	655	486							
548.exchange2_r	192	401	1250	403	1250	402	1250							
557.xz_r	192	525	395	524	396	524	396							

SPECrate®2017_int_base = 600

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.0-ic19.0u4/lib/intel64:/home/cpu2017-1.1.0-ic19.0u4/lib/ia32:/home/cpu2017-1.1.0-ic19.0u4/je5.0.1-32"

General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 600

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

General Notes (Continued)

numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance
DCU Streamer Prefetcher set to Disable
SNC set to Enable

Sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-9o83 Thu Nov 14 05:26:17 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
4 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 21 22 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 600

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     24
Socket(s):               4
NUMA node(s):           8
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
Stepping:                6
CPU MHz:                 2900.000
CPU max MHz:             3900.0000
CPU min MHz:             1200.0000
BogoMIPS:                5800.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                36608K
NUMA node0 CPU(s):      0-3,7,8,12-14,18-20,96-99,103,104,108-110,114-116
NUMA node1 CPU(s):      4-6,9-11,15-17,21-23,100-102,105-107,111-113,117-119
NUMA node2 CPU(s):      24-27,30-32,36-38,43,44,120-123,126-128,132-134,139,140
NUMA node3 CPU(s):      28,29,33-35,39-42,45-47,124,125,129-131,135-138,141-143
NUMA node4 CPU(s):      48-51,55-57,61-63,67,68,144-147,151-153,157-159,163,164
NUMA node5 CPU(s):      52-54,58-60,64-66,69-71,148-150,154-156,160-162,165-167
NUMA node6 CPU(s):      72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
NUMA node7 CPU(s):      76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 12 13 14 18 19 20 96 97 98 99 103 104 108 109 110 114 115 116
node 0 size: 193130 MB
node 0 free: 192070 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 600

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```

node 1 cpus: 4 5 6 9 10 11 15 16 17 21 22 23 100 101 102 105 106 107 111 112 113 117
118 119
node 1 size: 193526 MB
node 1 free: 192776 MB
node 2 cpus: 24 25 26 27 30 31 32 36 37 38 43 44 120 121 122 123 126 127 128 132 133
134 139 140
node 2 size: 193497 MB
node 2 free: 192935 MB
node 3 cpus: 28 29 33 34 35 39 40 41 42 45 46 47 124 125 129 130 131 135 136 137 138
141 142 143
node 3 size: 193526 MB
node 3 free: 193025 MB
node 4 cpus: 48 49 50 51 55 56 57 61 62 63 67 68 144 145 146 147 151 152 153 157 158
159 163 164
node 4 size: 193526 MB
node 4 free: 193019 MB
node 5 cpus: 52 53 54 58 59 60 64 65 66 69 70 71 148 149 150 154 155 156 160 161 162
165 166 167
node 5 size: 193526 MB
node 5 free: 193020 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
183 187 188
node 6 size: 193526 MB
node 6 free: 193014 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
189 190 191
node 7 size: 193523 MB
node 7 free: 193019 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 31 31
  1: 11 10 21 21 21 21 31 31
  2: 21 21 10 11 31 31 21 21
  3: 21 21 11 10 31 31 21 21
  4: 21 21 31 31 10 11 21 21
  5: 21 21 31 31 11 10 21 21
  6: 31 31 21 21 21 21 10 11
  7: 31 31 21 21 21 21 11 10

```

From /proc/meminfo

MemTotal: 1584929152 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 600

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

```

VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

```

```

uname -a:
Linux linux-9o83 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):           Not affected
Microarchitectural Data Sampling:          No status reported
CVE-2017-5754 (Meltdown):                   Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Indirect Branch Restricted
                                              Speculation, IBPB, IBRS_FW

```

```
run-level 3 Nov 14 01:02
```

```

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       btrfs    744G  147G  597G  20% /home

```

```

From /sys/devices/virtual/dmi/id
BIOS:      Lenovo  -[TEE141E-2.30]- 07/02/2019
Vendor:    Lenovo
Product:   ThinkSystem SR850  -[7X1925Z000]-
Product Family: ThinkSystem
Serial:    1234567890

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 600

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
          | 541.leela_r(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran   | 548.exchange2_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 600

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalanchmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate[®]2017_int_base = 600

SPECrate[®]2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.0 on 2019-11-13 16:26:16-0500.

Report generated on 2019-12-11 12:48:00 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-11.