



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TOG-424RT2

(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

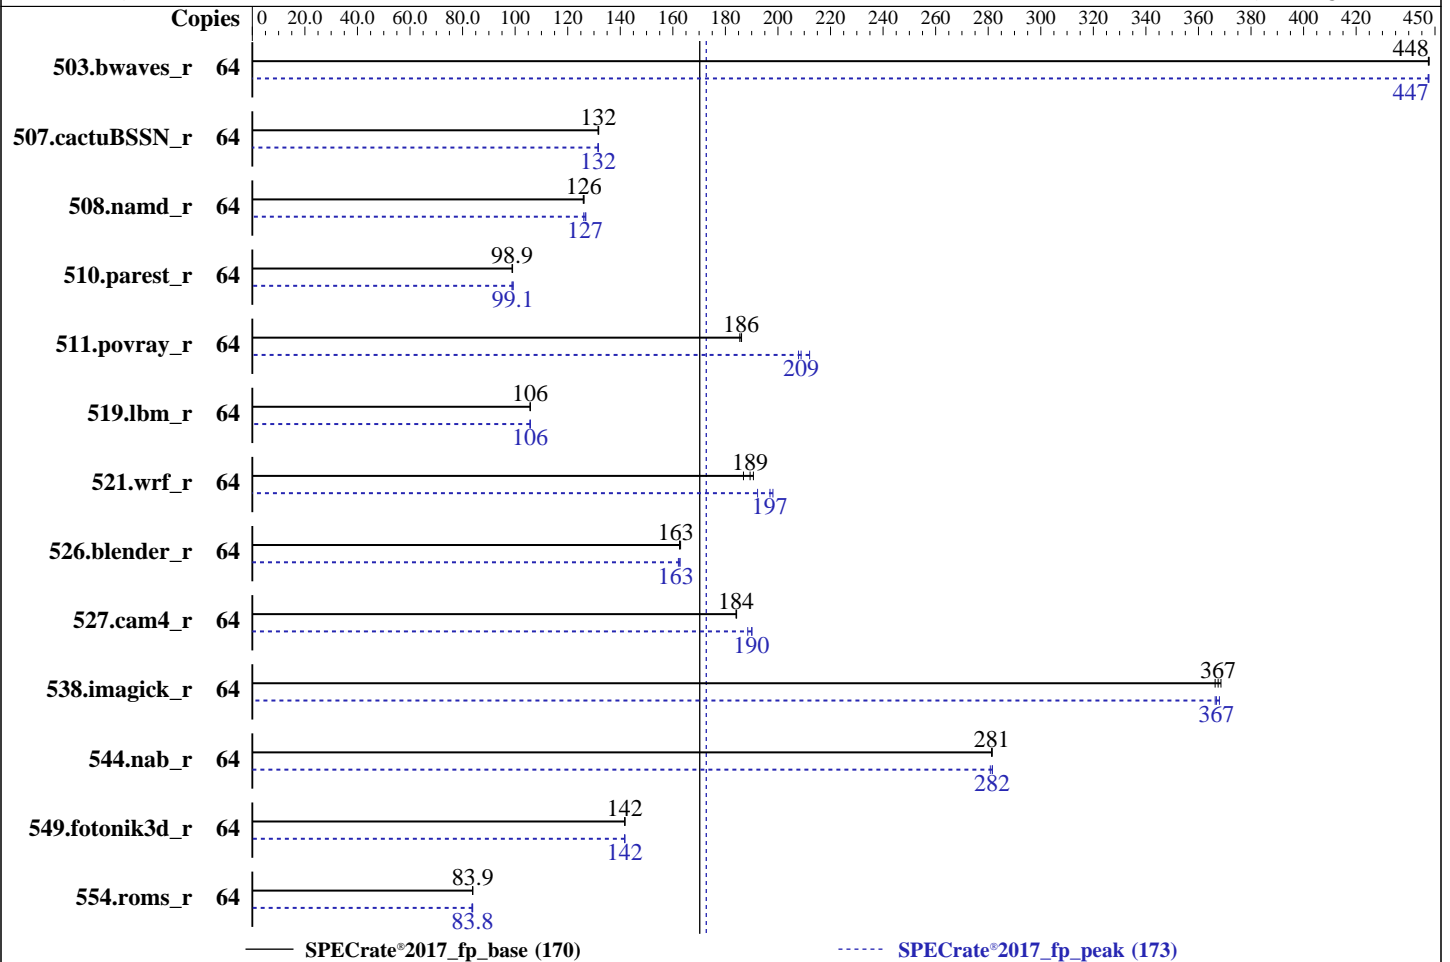

### Hardware

CPU Name: Intel Xeon Gold 5218  
 Max MHz: 3900  
 Nominal: 2300  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)  
 Storage: 1 x 480 GB SSD  
 Other: None

### Software

OS: CentOS Linux release 7.7.1908 (Core)  
 3.10.0-1062.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.243 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.243 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 3.0c released Apr-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: Default



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
DS400TOG-424RT2  
(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Nov-2019  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<b>1434</b>	<b>448</b>	1434	447	1433	448	64	<b>1434</b>	<b>447</b>	1434	448	1434	447
507.cactuBSSN_r	64	615	132	616	132	<b>615</b>	<b>132</b>	64	616	132	615	132	<b>616</b>	<b>132</b>
508.namd_r	64	<b>482</b>	<b>126</b>	483	126	482	126	64	<b>480</b>	<b>127</b>	479	127	482	126
510.parest_r	64	<b>1692</b>	<b>98.9</b>	1691	99.0	1694	98.9	64	1687	99.2	1695	98.8	<b>1689</b>	<b>99.1</b>
511.povray_r	64	806	185	<b>803</b>	<b>186</b>	803	186	64	<b>716</b>	<b>209</b>	705	212	719	208
519.lbm_r	64	<b>638</b>	<b>106</b>	638	106	638	106	64	<b>638</b>	<b>106</b>	638	106	638	106
521.wrf_r	64	752	191	<b>757</b>	<b>189</b>	767	187	64	724	198	746	192	<b>728</b>	<b>197</b>
526.blender_r	64	<b>599</b>	<b>163</b>	600	163	598	163	64	599	163	601	162	<b>599</b>	<b>163</b>
527.cam4_r	64	<b>608</b>	<b>184</b>	607	184	608	184	64	<b>589</b>	<b>190</b>	594	189	589	190
538.imagick_r	64	434	366	<b>433</b>	<b>367</b>	432	369	64	434	366	433	368	<b>434</b>	<b>367</b>
544.nab_r	64	383	282	<b>383</b>	<b>281</b>	383	281	64	383	282	<b>383</b>	<b>282</b>	384	281
549.fotonik3d_r	64	<b>1759</b>	<b>142</b>	1760	142	1759	142	64	1760	142	1761	142	<b>1760</b>	<b>142</b>
554.roms_r	64	<b>1213</b>	<b>83.9</b>	1214	83.8	1213	83.9	64	<b>1214</b>	<b>83.8</b>	1217	83.5	1213	83.8

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms.  
Intel has granted a one-time waiver for this result.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DS400TOG-424RT2

(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Nov-2019

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on NODE4 Fri Nov 29 12:41:01 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

Core(s) per socket: 16

Socket(s): 2

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
DS400TOG-424RT2  
(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Nov-2019  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz  
Stepping: 7  
CPU MHz: 999.932  
CPU max MHz: 3900.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4600.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 22528K  
NUMA node0 CPU(s): 0-15,32-47  
NUMA node1 CPU(s): 16-31,48-63

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_l3 cdp\_l3 intel\_ppin intel\_pt ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear spec\_ctrl intel\_stibp flush\_l1d arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 32 33 34 35 36 37 38 39 40 41 42 43
44 45 46 47
node 0 size: 391844 MB
node 0 free: 365859 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63
node 1 size: 393216 MB
node 1 free: 369048 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DS400TOG-424RT2

(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Nov-2019

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      791230096 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
centos-release: CentOS Linux release 7.7.1908 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.7 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.7.1908 (Core)
system-release: CentOS Linux release 7.7.1908 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

uname -a:

```
Linux NODE4 3.10.0-1062.el7.x86_64 #1 SMP Wed Aug 7 18:08:02 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: Load fences, __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full retpoline, IBPB
```

run-level 3 Nov 29 02:18

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/centos-home xfs  392G  208G  185G  53% /home
```

From /sys/devices/virtual/dmi/id

```
BIOS:      American Megatrends Inc. 3.0c 04/09/2019
Vendor:    Tyrone Systems
Product:   DS400TOG-424RT2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
DS400TOG-424RT2  
(2.30 GHz, Intel Xeon Gold 5218)

**SPECrate®2017\_fp\_base = 170**

**SPECrate®2017\_fp\_peak = 173**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Nov-2019  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

Serial: A309085X9905828

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
DS400TOG-424RT2  
(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Nov-2019  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
DS400TOG-424RT2  
(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Nov-2019  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
DS400TOG-424RT2  
(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Nov-2019  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DS400TOG-424RT2

(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Nov-2019

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DS400TOG-424RT2

(2.30 GHz, Intel Xeon Gold 5218)

SPECrate®2017\_fp\_base = 170

SPECrate®2017\_fp\_peak = 173

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Nov-2019

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Peak Optimization Flags (Continued)

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.html>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.xml>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-29 12:40:59-0500.

Report generated on 2020-10-29 16:04:23 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.