



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55


Test Date: Mar-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

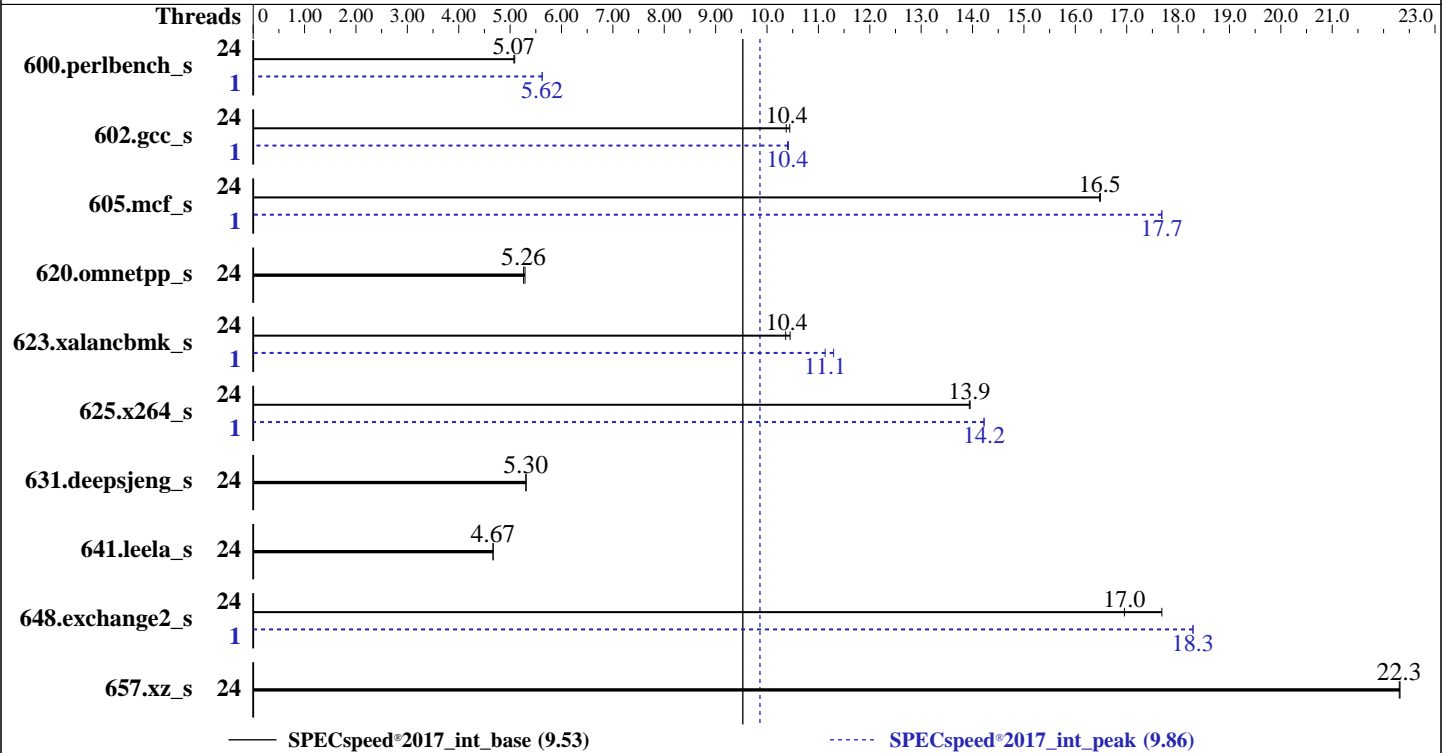

### Hardware

CPU Name: AMD EPYC 7F72  
 Max MHz: 3700  
 Nominal: 3200  
 Enabled: 24 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 192 MB I+D on chip per chip, 16 MB shared / 2 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)  
 Storage: 1 x 800 GB SAS12 SSD  
 Other: None

### Software

OS: Ubuntu 19.04  
 kernel 5.0.0-16-generic  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.4.4 released Mar-2020  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	<b>350</b>	<b>5.07</b>	349	5.09			1	<b>316</b>	<b>5.62</b>	316	5.63		
602.gcc_s	24	381	10.4	<b>384</b>	<b>10.4</b>			1	382	10.4	<b>383</b>	<b>10.4</b>		
605.mcf_s	24	286	16.5	<b>287</b>	<b>16.5</b>			1	<b>267</b>	<b>17.7</b>	267	17.7		
620.omnetpp_s	24	308	5.29	<b>310</b>	<b>5.26</b>			24	308	5.29	<b>310</b>	<b>5.26</b>		
623.xalancbmk_s	24	136	10.4	<b>137</b>	<b>10.4</b>			1	<b>127</b>	<b>11.1</b>	125	11.3		
625.x264_s	24	126	14.0	<b>127</b>	<b>13.9</b>			1	124	14.2	<b>124</b>	<b>14.2</b>		
631.deepsjeng_s	24	270	5.31	<b>270</b>	<b>5.30</b>			24	270	5.31	<b>270</b>	<b>5.30</b>		
641.leela_s	24	<b>365</b>	<b>4.67</b>	365	4.67			24	<b>365</b>	<b>4.67</b>	365	4.67		
648.exchange2_s	24	166	17.7	<b>173</b>	<b>17.0</b>			1	161	18.3	<b>161</b>	<b>18.3</b>		
657.xz_s	24	277	22.3	<b>277</b>	<b>22.3</b>			24	277	22.3	<b>277</b>	<b>22.3</b>		

SPECspeed®2017\_int\_base = **9.53**

SPECspeed®2017\_int\_peak = **9.86**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-23"

LD\_LIBRARY\_PATH =

"/root/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/64;/root/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "24"

Environment variables set by runcpu during the 600.perlbench\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

OMP\_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 2  
 CCX as NUMA Domain set to Enabled  
 System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost Enabled  
 Cstates set to Enabled  
 Memory Patrol Scrub Disabled  
 Memory Refresh Rate set to 1x  
 PCI ASPM L1 Link Power Management Disabled  
 Determinism Slider set to Power Determinism  
 Efficiency Optimized Mode Disabled  
 Logical Processor Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on user-PowerEdge-R6515 Tue Mar 24 03:58:24 2020

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : AMD EPYC 7F72 24-Core Processor  
   1 "physical id"s (chips)  
   24 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following  
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
   cpu cores : 24  
   siblings : 24  
   physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Byte Order: Little Endian  
 Address sizes: 43 bits physical, 48 bits virtual  
 CPU(s): 24  
 On-line CPU(s) list: 0-23  
 Thread(s) per core: 1  
 Core(s) per socket: 24  
 Socket(s): 1  
 NUMA node(s): 12  
 Vendor ID: AuthenticAMD  
 CPU family: 23  
 Model: 49

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

Model name:          AMD EPYC 7F72 24-Core Processor
Stepping:           0
CPU MHz:            3693.221
BogoMIPS:           6387.85
Virtualization:     AMD-V
L1d cache:          32K
L1i cache:          32K
L2 cache:           512K
L3 cache:           16384K
NUMA node0 CPU(s): 0,1
NUMA node1 CPU(s): 2,3
NUMA node2 CPU(s): 4,5
NUMA node3 CPU(s): 6,7
NUMA node4 CPU(s): 8,9
NUMA node5 CPU(s): 10,11
NUMA node6 CPU(s): 12,13
NUMA node7 CPU(s): 14,15
NUMA node8 CPU(s): 16,17
NUMA node9 CPU(s): 18,19
NUMA node10 CPU(s): 20,21
NUMA node11 CPU(s): 22,23
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 12 nodes (0-11)
node 0 cpus: 0 1
node 0 size: 21116 MB
node 0 free: 20900 MB
node 1 cpus: 2 3
node 1 size: 21501 MB
node 1 free: 21389 MB
node 2 cpus: 4 5

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

node 2 size: 21480 MB
node 2 free: 21323 MB
node 3 cpus: 6 7
node 3 size: 21501 MB
node 3 free: 21370 MB
node 4 cpus: 8 9
node 4 size: 21501 MB
node 4 free: 21300 MB
node 5 cpus: 10 11
node 5 size: 21501 MB
node 5 free: 21368 MB
node 6 cpus: 12 13
node 6 size: 21501 MB
node 6 free: 21411 MB
node 7 cpus: 14 15
node 7 size: 21501 MB
node 7 free: 21415 MB
node 8 cpus: 16 17
node 8 size: 21504 MB
node 8 free: 21444 MB
node 9 cpus: 18 19
node 9 size: 21501 MB
node 9 free: 21179 MB
node 10 cpus: 20 21
node 10 size: 21501 MB
node 10 free: 21429 MB
node 11 cpus: 22 23
node 11 size: 21489 MB
node 11 free: 21406 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11
  0: 10 11 11 11 11 11 12 12 12 12 12 12
  1: 11 10 11 11 11 11 12 12 12 12 12 12
  2: 11 11 10 11 11 11 12 12 12 12 12 12
  3: 11 11 11 10 11 11 12 12 12 12 12 12
  4: 11 11 11 11 10 11 12 12 12 12 12 12
  5: 11 11 11 11 11 10 12 12 12 12 12 12
  6: 12 12 12 12 12 12 10 11 11 11 11 11
  7: 12 12 12 12 12 12 11 10 11 11 11 11
  8: 12 12 12 12 12 12 11 11 10 11 11 11
  9: 12 12 12 12 12 12 11 11 11 10 11 11
 10: 12 12 12 12 12 12 11 11 11 11 10 11
 11: 12 12 12 12 12 12 11 11 11 11 11 10

```

From /proc/meminfo

MemTotal: 263785772 kB

HugePages\_Total: 0

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

debian\_version: buster/sid

os-release:

NAME="Ubuntu"

VERSION="19.04 (Disco Dingo)"

ID=ubuntu

ID\_LIKE=debian

PRETTY\_NAME="Ubuntu 19.04"

VERSION\_ID="19.04"

HOME\_URL="https://www.ubuntu.com/"

SUPPORT\_URL="https://help.ubuntu.com/"

uname -a:

Linux user-PowerEdge-R6515 5.0.0-16-generic #17-Ubuntu SMP Wed May 15 10:52:21 UTC 2019 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected

Microarchitectural Data Sampling: Not affected

CVE-2017-5754 (Meltdown): Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS\_FW, STIBP: disabled, RSB filling

run-level 3 Mar 24 03:47 last=5

SPEC is set to: /root/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	732G	32G	663G	5%	/

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 1.4.4 03/18/2020

Vendor: Dell Inc.

Product: PowerEdge R6515

Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2020  
Hardware Availability: Apr-2020  
Software Availability: Aug-2019

## Platform Notes (Continued)

7x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200  
1x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200  
8x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
-----  
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++   | 623.xalanbmk_s(peak)  
=====
```

```
-----  
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++   | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

```
-----  
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++   | 623.xalanbmk_s(peak)  
=====
```

```
-----  
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: i386-unknown-linux-gnu  
-----
```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Date: Mar-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Base Portability Flags (Continued)

625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

### C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

### Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp  
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Base Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang
```

602.gcc\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -fgnu89-inline -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc
```

605.mcf\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc
```

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks (except as noted below):

-Wno-return-type

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.53

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017\_int\_peak = 9.86

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Other Flags (Continued)

623.xalancbmk\_s: -Wno-return-type  
-L/sppo/dev/cpu2017/v110/amd\_speed\_aocc200\_rome\_C\_lib/32

Fortran benchmarks:  
-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-24 04:58:23-0400.  
Report generated on 2020-04-14 14:08:58 by CPU2017 PDF formatter v6255.  
Originally published on 2020-04-14.