



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

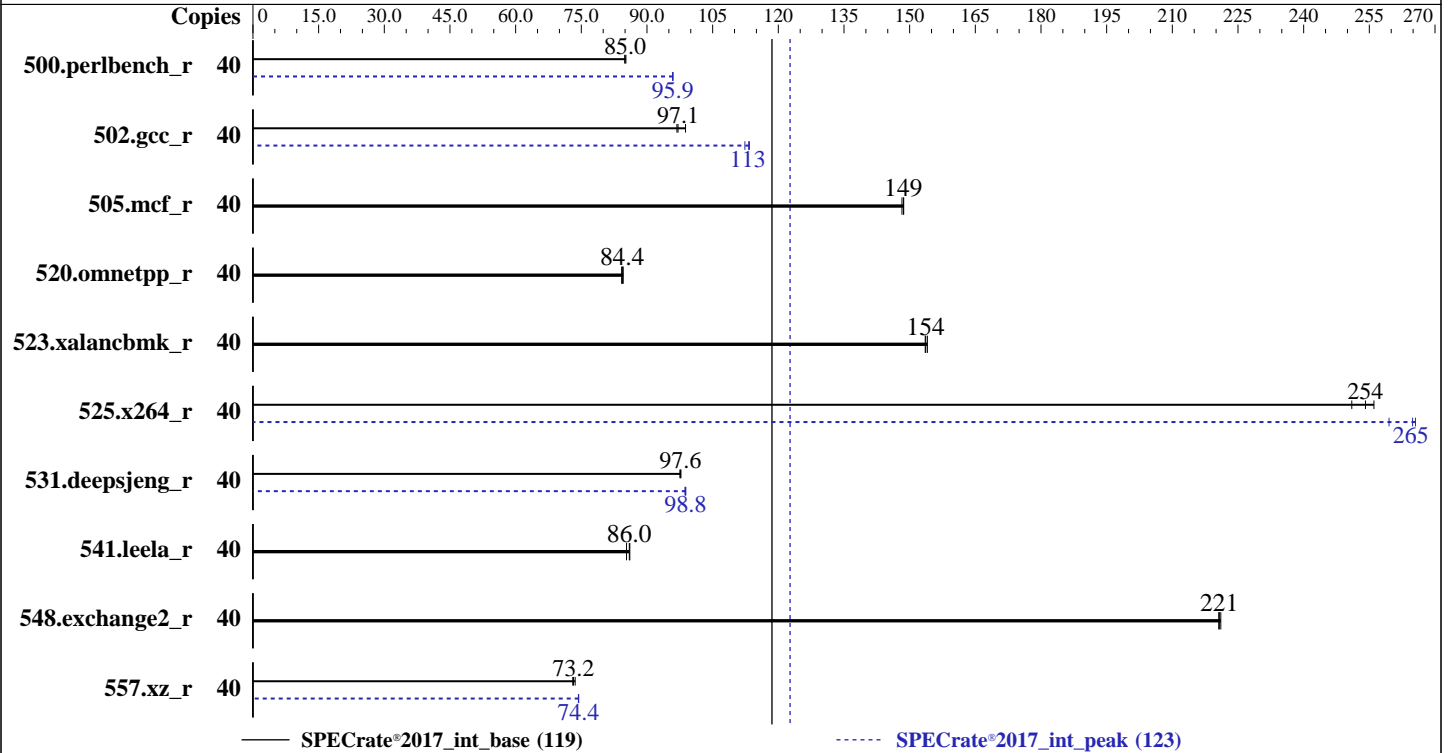

Hardware

CPU Name: Intel Xeon Silver 4210R
 Max MHz: 3200
 Nominal: 2400
 Enabled: 20 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 13.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2933V-R, running at 2400)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.1 kernel 4.18.0-147.el8.x86_64
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 2.7.3 released Mar-2020
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	750	84.9	<u>749</u>	<u>85.0</u>	747	85.2	40	<u>664</u>	<u>95.9</u>	664	95.9	664	95.9
502.gcc_r	40	<u>583</u>	<u>97.1</u>	585	96.8	573	98.8	40	504	112	499	113	<u>500</u>	<u>113</u>
505.mcf_r	40	435	149	436	148	<u>435</u>	<u>149</u>	40	435	149	436	148	<u>435</u>	<u>149</u>
520.omnetpp_r	40	620	84.6	<u>622</u>	<u>84.4</u>	623	84.2	40	620	84.6	<u>622</u>	<u>84.4</u>	623	84.2
523.xalancbmk_r	40	<u>275</u>	<u>154</u>	275	154	274	154	40	<u>275</u>	<u>154</u>	275	154	274	154
525.x264_r	40	274	256	<u>276</u>	<u>254</u>	279	251	40	264	266	<u>264</u>	<u>265</u>	270	259
531.deepsjeng_r	40	470	97.5	<u>469</u>	<u>97.6</u>	469	97.8	40	464	98.9	<u>464</u>	<u>98.8</u>	464	98.7
541.leela_r	40	<u>771</u>	<u>86.0</u>	770	86.1	776	85.3	40	<u>771</u>	<u>86.0</u>	770	86.1	776	85.3
548.exchange2_r	40	475	221	474	221	<u>475</u>	<u>221</u>	40	475	221	474	221	<u>475</u>	<u>221</u>
557.xz_r	40	<u>590</u>	<u>73.2</u>	587	73.6	591	73.0	40	<u>581</u>	<u>74.4</u>	581	74.4	581	74.3

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/dev/shm/cpu2017/lib/intel64:/dev/shm/cpu2017/lib/ia32:/dev/shm/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

General Notes (Continued)

is mitigated in the system as tested and documented.
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

 runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:
 Virtualization Technology disabled
 DCU Streamer Prefetcher disabled
 System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to Autonomous
 C1E disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub disabled
 Logical Processor enabled
 CPU Interconnect Bus Link Power Management enabled
 PCI ASPM L1 Link Power Management enabled

Sysinfo program /dev/shm/cpu2017/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
 running on localhost.localdomain Tue Apr 21 16:33:45 2020

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
 2 "physical id"s (chips)
 40 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings  : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Platform Notes (Continued)

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                40
On-line CPU(s) list:  0-39
Thread(s) per core:    2
Core(s) per socket:    10
Socket(s):             2
NUMA node(s):         2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
Stepping:              7
CPU MHz:               1494.579
CPU max MHz:           3200.0000
CPU min MHz:           1000.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              14080K
NUMA node0 CPU(s):    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38
NUMA node1 CPU(s):    1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpeltb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

/proc/cpuinfo cache data
cache size : 14080 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38
node 0 size: 192073 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Platform Notes (Continued)

```
node 0 free: 183930 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39
node 1 size: 193505 MB
node 1 free: 184684 MB
node distances:
node    0    1
  0:   10   21
  1:   21   10
```

```
From /proc/meminfo
MemTotal:          394832916 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: usercopy/swapgs barriers and __user
                                              pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS, IBPB: conditional,
                                              RSB filling
```

run-level 3 Apr 21 16:15

SPEC is set to: /dev/shm/cpu2017

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	189G	7.6G	181G	5%	/dev/shm

```

From /sys/devices/virtual/dmi/id
BIOS: Dell Inc. 2.7.3 03/25/2020
Vendor: Dell Inc.
Product: PowerEdge C6420
Product Family: PowerEdge

```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
 6x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
 1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
 2x 00AD063200AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
 3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
 4x Not Specified Not Specified

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C | 502.gcc_r(peak)
=====

```

```

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
  | 525.x264_r(base, peak) 557.xz_r(base)
=====

```

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5 NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5 NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)
=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto -mfpmath=sse
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Portability Flags (Continued)

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -flto -O3
-ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECrate®2017_int_base = 119

SPECrate®2017_int_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

```
531.deepsjeng_r: -m64 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-21 16:33:44-0400.

Report generated on 2020-05-12 14:56:22 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-12.