



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35


Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

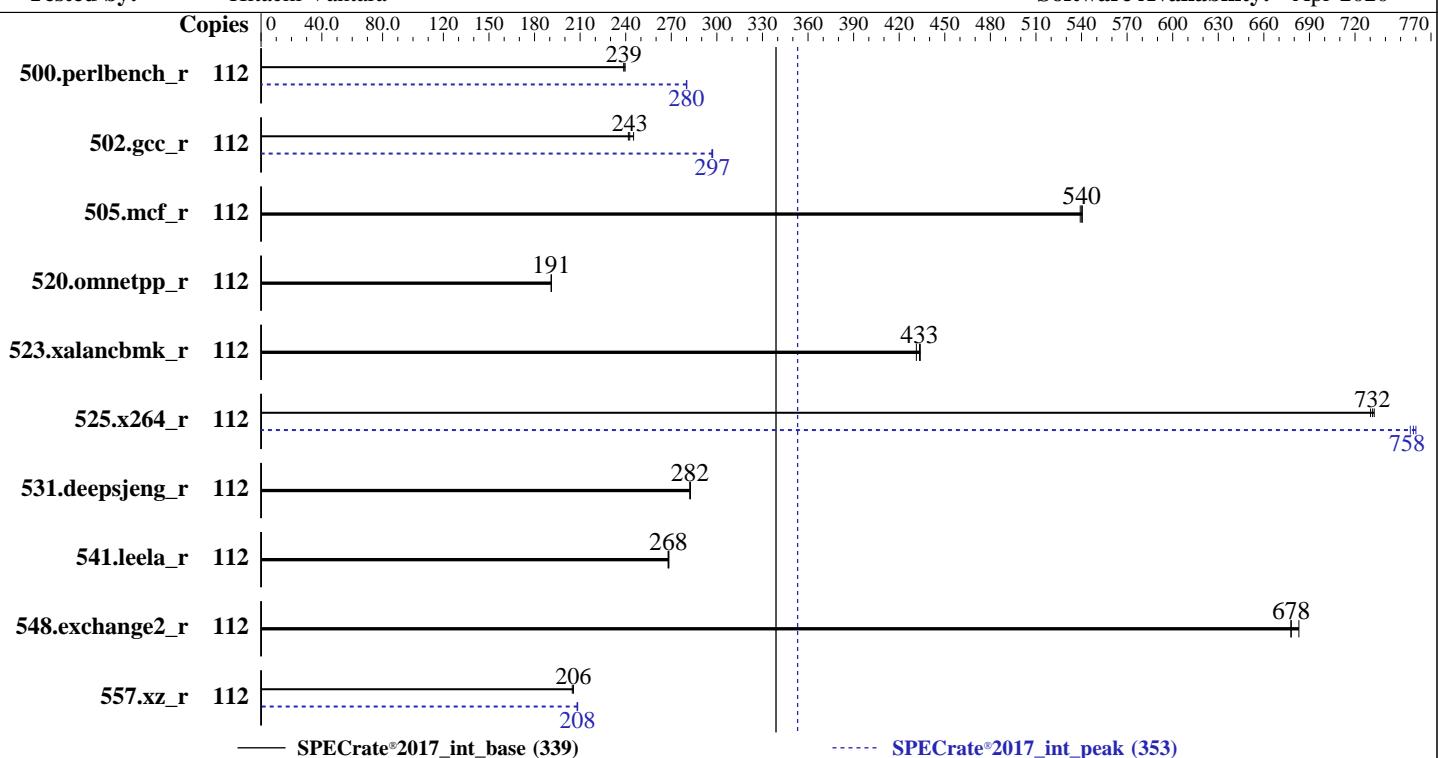

Hardware

CPU Name: Intel Xeon Gold 6258R
Max MHz: 4000
Nominal: 2700
Enabled: 56 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 38.5 MB I+D on chip per chip
Other: None
Memory: 384 GB (24 x 16 GB 1Rx4 PC4-2666V-R)
Storage: 1 x 1.92 TB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.0 (Ootpa)
4.18.0-80.el8.x86_64
Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Version S5BH3B17.H01 released Jun-2020
File System: xfs
System State: Run level 3 (Multi-User)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	744	240	747	239	747	239	112	636	280	637	280	637	280		
502.gcc_r	112	656	242	647	245	654	243	112	535	297	534	297	534	297		
505.mcf_r	112	336	539	335	541	335	540	112	336	539	335	541	335	540		
520.omnetpp_r	112	769	191	769	191	769	191	112	769	191	769	191	769	191	769	191
523.xalancbmk_r	112	273	433	273	434	274	431	112	273	433	273	434	274	431		
525.x264_r	112	268	732	269	730	268	733	112	259	758	259	756	258	760		
531.deepsjeng_r	112	454	283	455	282	455	282	112	454	283	455	282	455	282		
541.leela_r	112	692	268	692	268	691	268	112	692	268	692	268	691	268		
548.exchange2_r	112	433	678	430	683	433	678	112	433	678	430	683	433	678		
557.xz_r	112	589	206	591	205	588	206	112	581	208	581	208	580	208		

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/root/speccpu/lib/intel64:/root/speccpu/lib/ia32:/root/speccpu/je5.0.1-
    32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

Pwr and Perf Profile set to High Performance

Sysinfo program /root/speccpu/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edbe6e46a485a0011
running on 192-168-159-137 Tue Aug 25 02:52:14 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
  2 "physical id"s (chips)
  112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings   : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
```

From lscpu:

Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
Stepping: 7
CPU MHz: 1000.037
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27,56-83
NUMA node1 CPU(s): 28-55,84-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp_epp pku ospke avx512_vnni flush_lld arch_capabilities

/proc/cpuinfo cache data
cache size : 39424 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
node 0 size: 191835 MB
node 0 free: 182884 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

Platform Notes (Continued)

```
107 108 109 110 111
node 1 size: 193524 MB
node 1 free: 187194 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal:      394608664 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.0 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.0"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga
```

```
uname -a:
Linux 192-168-159-137 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Aug 24 21:04

```
SPEC is set to: /root/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   1.8T  103G  1.7T   6%  /
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECCrate®2017_int_base = 339

SPECCrate®2017_int_peak = 353

CPU2017 License: 35

Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. S5BH3B17.H01 06/30/2020

Vendor: Hitachi Vantara

Product: Advanced Server DS220

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A2K40BB2-CTD 16 GB 1 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(peak) 557.xz_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

Compiler Version Notes (Continued)

Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(peak) 557.xz_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(peak) 557.xz_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

Compiler Version Notes (Continued)

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Sponsor: Hitachi Vantara

Tested by: Hitachi Vantara

Test Date: Aug-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Sponsor: Hitachi Vantara

Tested by: Hitachi Vantara

Test Date: Aug-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Peak Portability Flags (Continued)

525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin
-std=gnu89
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hitachi Vantara

Advanced Server DS220
(Intel Xeon Gold 6258R, 2.70 GHz)

SPECrate®2017_int_base = 339

SPECrate®2017_int_peak = 353

CPU2017 License: 35

Test Date: Aug-2020

Test Sponsor: Hitachi Vantara

Hardware Availability: Mar-2020

Tested by: Hitachi Vantara

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HitachiVantaraPlatform-DS220-V1.html>

http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HitachiVantaraPlatform-DS220-V1.xml>

http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-08-24 14:52:13-0400.

Report generated on 2020-09-16 10:27:14 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-15.