



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro


SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

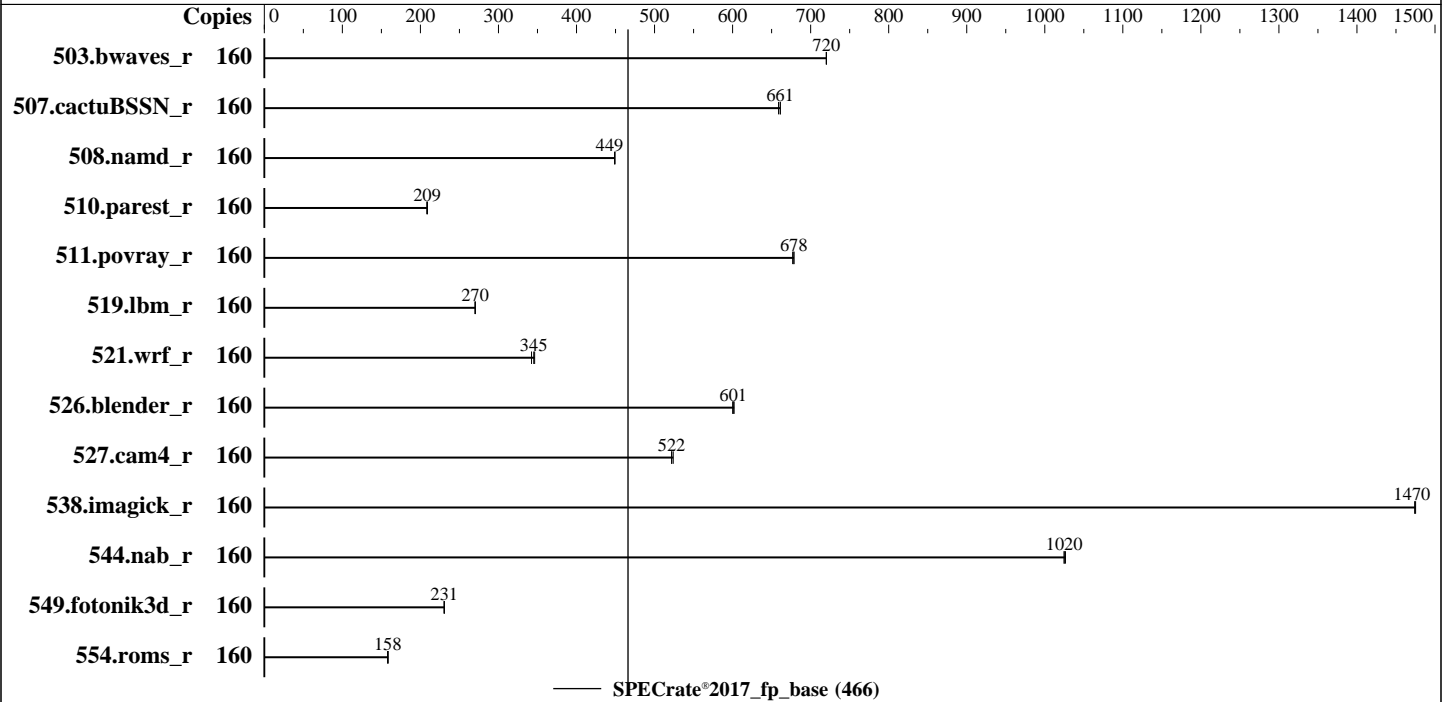

Hardware

CPU Name: Intel Xeon Platinum 8380
Max MHz: 3400
Nominal: 2300
Enabled: 80 cores, 2 chips, 2 threads/core
Orderable: 1,2 Chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 1 TB
(32 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 400 GB NVMe SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2
5.3.18-22-default
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler
Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler
Classic Build 20201112 for Linux;
Parallel: No
Firmware: Version 1.0b released Apr-2021 tested as Mar-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	2228	720	2228	720	<u>2228</u>	<u>720</u>							
507.cactuBSSN_r	160	<u>306</u>	<u>661</u>	306	661	307	659							
508.namd_r	160	339	449	<u>338</u>	<u>449</u>	338	449							
510.parest_r	160	2010	208	<u>2006</u>	<u>209</u>	2002	209							
511.povray_r	160	552	677	551	679	<u>551</u>	<u>678</u>							
519.lbm_r	160	624	270	<u>624</u>	<u>270</u>	624	270							
521.wrf_r	160	1035	346	1047	342	<u>1038</u>	<u>345</u>							
526.blender_r	160	405	602	<u>405</u>	<u>601</u>	406	600							
527.cam4_r	160	534	524	536	522	<u>536</u>	<u>522</u>							
538.imagick_r	160	270	1480	<u>270</u>	<u>1470</u>	270	1470							
544.nab_r	160	<u>263</u>	<u>1020</u>	263	1020	262	1030							
549.fotonik3d_r	160	2703	231	<u>2703</u>	<u>231</u>	2707	230							
554.roms_r	160	1603	159	1610	158	<u>1605</u>	<u>158</u>							

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/root/cpu2017-1.1.5/lib/intel64:/root/cpu2017-1.1.5/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM
memory using openSUSE Leap 15.2
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
SNC (Sub NUMA)= Enable
KTI Prefetch= Enable

```
Sysinfo program /root/cpu2017-1.1.5/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on 148-253 Sat Mar 27 17:01:04 2021
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
 2 "physical id"s (chips)
160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 40
siblings : 80
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        46 bits physical, 57 bits virtual
CPU(s):               160
On-line CPU(s) list: 0-159
Thread(s) per core:   2
Core(s) per socket:  40
Socket(s):            2
NUMA node(s):        4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                106
Model name:           Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping:             6
CPU MHz:              3000.000
BogoMIPS:             4600.00
Virtualization:      VT-x
L1d cache:           48K
L1i cache:           32K
L2 cache:            1280K
L3 cache:            61440K
NUMA node0 CPU(s):   0-19,80-99
NUMA node1 CPU(s):   20-39,100-119
NUMA node2 CPU(s):   40-59,120-139
NUMA node3 CPU(s):   60-79,140-159

```

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid md_clear pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 61440 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
88 89 90 91 92 93 94 95 96 97 98 99
node 0 size: 257587 MB
node 0 free: 247152 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
node 1 size: 258038 MB
node 1 free: 250102 MB
node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139
node 2 size: 258004 MB
node 2 free: 250042 MB
node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
node 3 size: 258035 MB
node 3 free: 249955 MB
node distances:
node   0   1   2   3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10

```

```

From /proc/meminfo
MemTotal:      1056425832 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"

```

```

uname -a:
Linux 148-253 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):      Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Mar 27 13:00

```

SPEC is set to: /root/cpu2017-1.1.5
  Filesystem      Type  Size  Used Avail Use% Mounted on
 /dev/nvme0n1p2  xfs   372G   66G  306G  18% /

```

```

From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         Super Server
Product Family: Family
Serial:         0123456789

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  32x SK Hynix HMA84GR7DJR4N-XN 32 GB 2 rank 3200

```

```

BIOS:
  BIOS Vendor:      American Megatrends International, LLC.
  BIOS Version:    1.0b
  BIOS Date:       03/19/2021
  BIOS Revision:   5.22

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Compiler Version Notes (Continued)

Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Base Portability Flags (Continued)

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 466

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-align array32byte -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-03-27 20:01:03-0400.

Report generated on 2021-04-27 16:20:51 by CPU2017 PDF formatter v6442.

Originally published on 2021-04-27.