SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

$SPECrate^{®}2017\_int\_base = 130$

$SPECrate^{®}2017\_int\_peak = 140$

CPU2017 License: 006042	**Test Date:** Oct-2021
Test Sponsor: Netweb Pte Ltd	**Hardware Availability:** Mar-2021
Tested by: Tyrone Systems	**Software Availability:** Aug-2020

Copies

- 500.perlbench_r 32 — 101 / 107
- 502.gcc_r 32 — 105 / 135
- 505.mcf_r 32 — 169 / 204
- 520.omnetpp_r 32 — 61.5 / 62.2
- 523.xalancbmk_r 32 — 106 / 134
- 525.x264_r 32 — 299 / 304
- 531.deepsjeng_r 32 — 123 / 125
- 541.leela_r 32 — 118 / 118
- 548.exchange2_r 32 — 342 / 337
- 557.xz_r 32 — 79.4 / 79.3

SPECrate®2017_int_base (130)   SPECrate®2017_int_peak (140)

Hardware

CPU Name: AMD Ryzen Threadripper PRO 3955WX
 Max MHz: 4300
 Nominal: 3900
Enabled: 16 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2933P-R)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux 8.0 (Ootpa)
 kernel version 4.18.0-80.el8.x86_64
 4.18.0-80.el8.x86_64
Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
Parallel: No
Firmware: Version 1.0c released Sep-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc: jemalloc memory allocator library v5.2.0
Power Management: BIOS set to prefer performance at the cost of additional power usage.

Standard Performance Evaluation Corporation (info@spec.org)   https://www.spec.org/

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_base = 130

SPECrate®2017_int_peak = 140

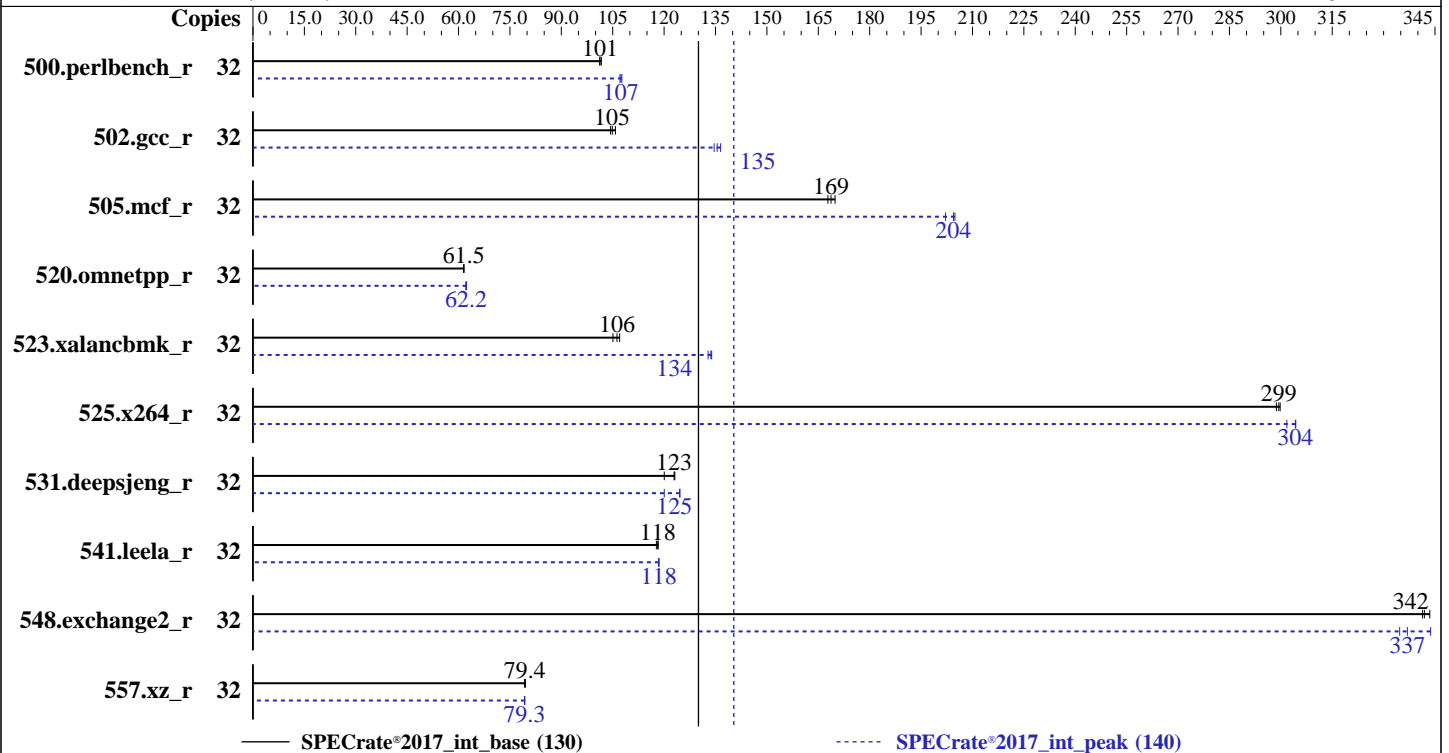|		
CPU2017 License: 006042	**Test Date:**	Oct-2021
Test Sponsor: Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by: Tyrone Systems	**Software Availability:**	Aug-2020

Results Table

Benchmark	**Base**						**Peak**						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	501	102	503	101	**503**	**101**	32	476	107	**474**	**107**	473	108
502.gcc_r	32	428	106	434	104	**432**	**105**	32	337	135	332	136	**334**	**135**
505.mcf_r	32	304	170	**306**	**169**	308	168	32	**253**	**204**	256	202	252	205
520.omnetpp_r	32	681	61.6	**683**	**61.5**	683	61.5	32	**675**	**62.2**	673	62.3	675	62.2
523.xalancbmk_r	32	316	107	**318**	**106**	322	105	32	**253**	**134**	254	133	252	134
525.x264_r	32	**187**	**299**	187	300	188	299	32	184	304	**184**	**304**	186	302
531.deepsjeng_r	32	305	120	298	123	**298**	**123**	32	**295**	**125**	305	120	294	125
541.leela_r	32	448	118	450	118	**449**	**118**	32	**447**	**118**	447	118	447	118
548.exchange2_r	32	244	343	**245**	**342**	246	341	32	244	344	**249**	**337**	251	335
557.xz_r	32	435	79.5	436	79.3	**435**	**79.4**	32	435	79.4	436	79.3	**436**	**79.3**
SPECrate®2017_int_base =	**130**												
SPECrate®2017_int_peak =	**140**												

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_base = 130

SPECrate®2017_int_peak = 140

CPU2017 License: 006042		**Test Date:**	Oct-2021
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by:	Tyrone Systems	**Software Availability:**	Aug-2020

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 1 x AMD EPYC 3955W x CPU + 512GB Memory using Redhat 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
BIOS Settings:
Determinism Control set to Manual
Determinism Slider set to Power
cTDP Control set to Manual
cTDP set to 280
Package Power Limit Control set to Manual
Package Power Limit set to 280
APBDIS set to 1
NUMA Nodes Per Socket set to Auto

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on spec Sat Oct  9 17:37:00 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD Ryzen Threadripper PRO 3955WX 16-Cores
        1  "physical id"s (chips)
        32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
```

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_base = 130

SPECrate®2017_int_peak = 140

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Oct-2021

Hardware Availability: Mar-2021

Software Availability: Aug-2020

Platform Notes (Continued)

```
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              32
      On-line CPU(s) list: 0-31
      Thread(s) per core:  2
      Core(s) per socket:  16
      Socket(s):           1
      NUMA node(s):        1
      Vendor ID:           AuthenticAMD
      CPU family:          23
      Model:               49
      Model name:          AMD Ryzen Threadripper PRO 3955WX 16-Cores
      Stepping:            0
      CPU MHz:             4137.807
      CPU max MHz:         3900.0000
      CPU min MHz:         2200.0000
      BogoMIPS:            7800.23
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            16384K
      NUMA node0 CPU(s):   0-31
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 hw_pstate sme ssbd sev ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
      cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
      arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
      pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
      smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

SPECrate®2017_int_base = 130

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_peak = 140

CPU2017 License: 006042   **Test Date:**   Oct-2021
Test Sponsor: Netweb Pte Ltd   **Hardware Availability:** Mar-2021
Tested by: Tyrone Systems   **Software Availability:** Aug-2020

Platform Notes (Continued)

```
  available: 1 nodes (0)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
  28 29 30 31
  node 0 size: 257802 MB
  node 0 free: 252569 MB
  node distances:
  node   0
    0:  10

From /proc/meminfo
   MemTotal:       263989408 kB
   HugePages_Total:    2048
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.0 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.0"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga

uname -a:
   Linux spec 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019 x86_64 x86_64
   x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):              No status reported
CVE-2018-3620 (L1 Terminal Fault):           Not affected
Microarchitectural Data Sampling:            No status reported
CVE-2017-5754 (Meltdown):                    Not affected
CVE-2018-3639 (Speculative Store Bypass):    Mitigation: Speculative Store
                                             Bypass disabled via prctl and
                                             seccomp
```

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

$SPECrate^{®}2017\_int\_base = 130$

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

$SPECrate^{®}2017\_int\_peak = 140$

CPU2017 License: 006042		**Test Date:**	Oct-2021
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by:	Tyrone Systems	**Software Availability:**	Aug-2020

Platform Notes (Continued)

```
 CVE-2017-5753 (Spectre variant 1):                    Mitigation: __user pointer
                                                       sanitization
 CVE-2017-5715 (Spectre variant 2):                    Mitigation: Full AMD retpoline,
                                                       IBPB: conditional, STIBP:
                                                       conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
 CVE-2019-11135 (TSX Asynchronous Abort):              No status reported

 run-level 3 Oct 9 17:36

 SPEC is set to: /home/cpu2017
    Filesystem              Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   392G  5.3G  387G   2% /home

 From /sys/devices/virtual/dmi/id
    Vendor:          Tyrone Systems
    Product:         SSA300TA-54TL
    Product Family:  AMD
    Serial:          5O20142109

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      8x Samsung M393A4K40DB2-CVF 32 GB 2 rank 2933

 BIOS:
    BIOS Vendor:      American Megatrends International, LLC.
    BIOS Version:     1.0c
    BIOS Date:        09/10/2021
    BIOS Revision:    1.12

 (End of data from sysinfo program)
```

Compiler Version Notes

```
================================================================================
C        | 502.gcc_r(peak)
--------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
--------------------------------------------------------------------------------
```

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

SPECrate®2017_int_base = 130

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_peak = 140

CPU2017 License: 006042	**Test Date:** Oct-2021
Test Sponsor: Netweb Pte Ltd	**Hardware Availability:** Mar-2021
Tested by: Tyrone Systems	**Software Availability:** Aug-2020

Compiler Version Notes (Continued)

```
==============================================================================
C        | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
         | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
C        | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
C        | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
         | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
C++      | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

SPECrate®2017_int_base = 130

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_peak = 140

CPU2017 License: 006042		**Test Date:**	Oct-2021
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by:	Tyrone Systems	**Software Availability:**	Aug-2020

Compiler Version Notes (Continued)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
```
clang
```

C++ benchmarks:
```
clang++
```

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_base = 130

SPECrate®2017_int_peak = 140

CPU2017 License: 006042		**Test Date:**	Oct-2021
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by:	Tyrone Systems	**Software Availability:**	Aug-2020

Base Compiler Invocation (Continued)

Fortran benchmarks:
```
flang
```

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
```

(Continued on next page)

Standard Performance Evaluation Corporation (info@spec.org)

https://www.spec.org/

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_base = 130

SPECrate®2017_int_peak = 140

CPU2017 License: 006042		**Test Date:**	Oct-2021
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by:	Tyrone Systems	**Software Availability:**	Aug-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
```
clang
```

C++ benchmarks:
```
clang++
```

Fortran benchmarks:
```
flang
```

Peak Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -D_FILE_OFFSET_BITS=64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-flto -Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-region-vectorize`
`-Wl,-mllvm -Wl,-vector-library=LIBMVEC`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`

(Continued on next page)

Standard Performance Evaluation Corporation (info@spec.org)   https://www.spec.org/

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

SPECrate®2017_int_base = 130

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_peak = 140

CPU2017 License: 006042		**Test Date:**	Oct-2021
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by:	Tyrone Systems	**Software Availability:**	Aug-2020

Peak Optimization Flags (Continued)

500.perlbench_r (continued):
```
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

502.gcc_r: `-m32 -flto -Wl,-mllvm -Wl,-function-specialize`
```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

505.mcf_r: `-flto -Wl,-mllvm -Wl,-function-specialize`
```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264_r: `Same as 500.perlbench_r`

557.xz_r: `Same as 505.mcf_r`

C++ benchmarks:

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

SPECrate®2017_int_base = 130

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_peak = 140

CPU2017 License: 006042		**Test Date:**	Oct-2021
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by:	Tyrone Systems	**Software Availability:**	Aug-2020

Peak Optimization Flags (Continued)

```
520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

```
531.deepsjeng_r: Same as 520.omnetpp_r
```

```
541.leela_r: Same as 520.omnetpp_r
```

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
502.gcc_r: -L/home/cpu2017/amd_rate_aocc200_rome_C_lib/32
```

(Continued on next page)

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SSA300TA-54TL
(3.90 GHz, AMD Ryzen Threadripper PRO 3955WX)

SPECrate®2017_int_base = 130

SPECrate®2017_int_peak = 140

CPU2017 License: 006042		**Test Date:**	Oct-2021
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Mar-2021
Tested by:	Tyrone Systems	**Software Availability:**	Aug-2020

Peak Other Flags (Continued)

C++ benchmarks:

523.xalancbmk_r: `-L/home/cpu2017/amd_rate_aocc200_rome_C_lib/32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-C4.2021-12-01.html`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Milan-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc200-flags-C4.2021-12-01.xml`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Milan-revB.xml`

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-09 08:07:00-0400.
Report generated on 2021-12-01 14:21:16 by CPU2017 PDF formatter v6442.
Originally published on 2021-11-30.