



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 152

xFusion 2288H V6 (Intel Xeon Silver 4310T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2022

Hardware Availability: Apr-2021

Software Availability: May-2021

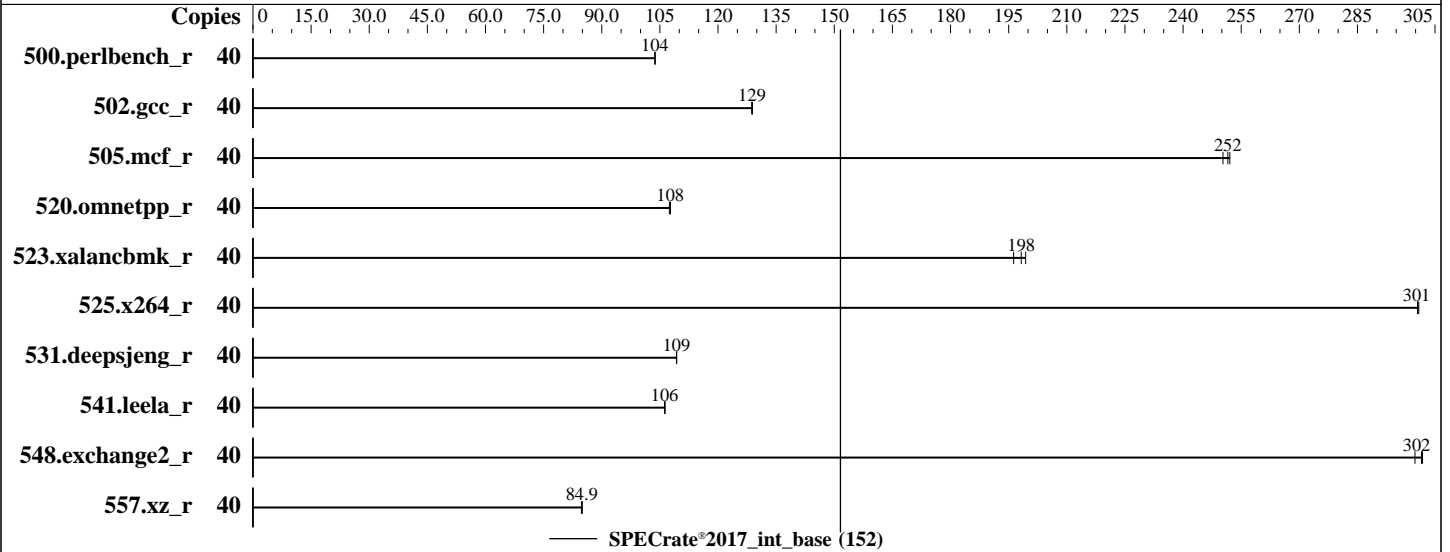

### Hardware

CPU Name: Intel Xeon Silver 4310T  
 Max MHz: 3400  
 Nominal: 2300  
 Enabled: 20 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 15 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 0.95 Released Dec-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 152

xFusion 2288H V6 (Intel Xeon Silver 4310T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Apr-2022  
Hardware Availability: Apr-2021  
Software Availability: May-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	614	104	<b>614</b>	<b>104</b>	614	104							
502.gcc_r	40	440	129	<b>440</b>	<b>129</b>	440	129							
505.mcf_r	40	256	252	<b>257</b>	<b>252</b>	258	250							
520.omnetpp_r	40	488	107	<b>487</b>	<b>108</b>	487	108							
523.xalancbmk_r	40	215	196	212	199	<b>213</b>	<b>198</b>							
525.x264_r	40	233	301	233	300	<b>233</b>	<b>301</b>							
531.deepsjeng_r	40	419	109	419	109	<b>419</b>	<b>109</b>							
541.leela_r	40	623	106	624	106	<b>624</b>	<b>106</b>							
548.exchange2_r	40	<b>348</b>	<b>302</b>	350	300	347	302							
557.xz_r	40	<b>509</b>	<b>84.9</b>	508	85.0	510	84.8							

SPECrate®2017\_int\_base = 152

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/spec2017/lib/intel64:/spec2017/lib/ia32"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 152

xFusion 2288H V6 (Intel Xeon Silver 4310T)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2021

### General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enabled SNC2 (2-clusters)

Sysinfo program /spec2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Thu Apr 14 05:03:01 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4310T CPU @ 2.30GHz
 2 "physical id"s (chips)
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 10
  siblings  : 20
 physical 0: cores 0 1 2 3 4 5 6 7 8 9
 physical 1: cores 0 1 2 3 4 5 6 7 8 9
```

```
From lscpu from util-linux 2.32.1:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                40
On-line CPU(s) list:   0-39
Thread(s) per core:    2
Core(s) per socket:    10
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Silver 4310T CPU @ 2.30GHz
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 152

xFusion 2288H V6 (Intel Xeon Silver 4310T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Apr-2022  
Hardware Availability: Apr-2021  
Software Availability: May-2021

### Platform Notes (Continued)

```

BIOS Model name: Intel(R) Xeon(R) Silver 4310T CPU @ 2.30GHz
Stepping: 6
CPU MHz: 2899.649
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 15360K
NUMA node0 CPU(s): 0-9,20-29
NUMA node1 CPU(s): 10-19,30-39
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed
adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect wbnoinvd dtherm ida arat pln pts hwp_epp avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid fsrm md_clear pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 15360 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 257141 MB
node 0 free: 256502 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 258041 MB
node 1 free: 257308 MB
node distances:
node  0  1
 0:  10  20
 1:  20  10

```

```

From /proc/meminfo
MemTotal: 527546472 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 152

### xFusion 2288H V6 (Intel Xeon Silver 4310T)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2021

## Platform Notes (Continued)

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.4 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.4"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:
  Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
  x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):           Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:         Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                             Bypass disabled via prctl and
                                             seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swapgs
                                             barriers and __user pointer
                                             sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB:
                                             conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):  Not affected

run-level 3 Apr 14 05:01

SPEC is set to: /spec2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda3       xfs   420G  19G  402G   5% /

From /sys/devices/virtual/dmi/id
Vendor:           XFUSION
Product:          2288H V6

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 152

xFusion 2288H V6 (Intel Xeon Silver 4310T)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2021

### Platform Notes (Continued)

Product Family: Whitley  
Serial: 123456

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2666

BIOS:

BIOS Vendor: INSYDE Corp.  
BIOS Version: 0.95  
BIOS Date: 12/22/2021  
BIOS Revision: 0.95

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
      | 525.x264_r(base) 557.xz_r(base)  
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

```
=====  
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
     | 541.leela_r(base)  
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

```
=====  
Fortran | 548.exchange2_r(base)  
-----
```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 152

xFusion 2288H V6 (Intel Xeon Silver 4310T)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2021

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 152

xFusion 2288H V6 (Intel Xeon Silver 4310T)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Apr-2022

**Hardware Availability:** Apr-2021

**Software Availability:** May-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-14 05:03:00-0400.

Report generated on 2022-05-10 19:10:08 by CPU2017 PDF formatter v6442.

Originally published on 2022-05-10.