



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

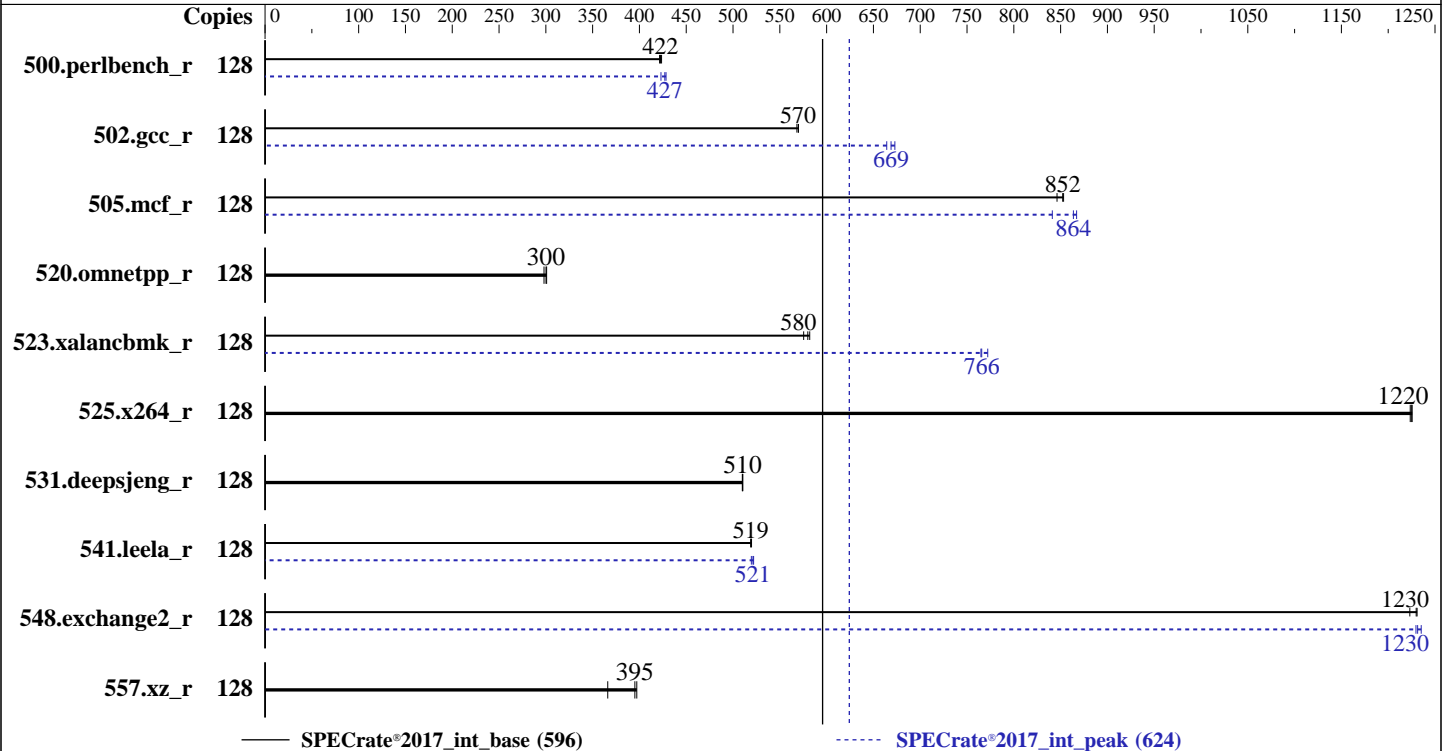

Hardware

CPU Name: AMD EPYC 7573X
 Max MHz: 3600
 Nominal: 2800
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 768 MB I+D on chip per chip, 96 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 Kernel 5.3.18-22-default
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: No
 Firmware: Version 0901 released Nov-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	481	424	<u>482</u>	<u>422</u>	483	422	128	476	428	<u>477</u>	<u>427</u>	482	423
502.gcc_r	128	318	570	<u>318</u>	<u>570</u>	319	568	128	269	673	<u>271</u>	<u>669</u>	273	664
505.mcf_r	128	242	853	244	846	<u>243</u>	<u>852</u>	128	<u>240</u>	<u>864</u>	239	867	246	841
520.omnetpp_r	128	<u>560</u>	<u>300</u>	558	301	563	298	128	<u>560</u>	<u>300</u>	558	301	563	298
523.xalancbmk_r	128	<u>233</u>	<u>580</u>	232	582	235	575	128	<u>177</u>	<u>766</u>	175	772	177	765
525.x264_r	128	183	1230	<u>183</u>	<u>1220</u>	183	1220	128	183	1230	<u>183</u>	<u>1220</u>	183	1220
531.deepsjeng_r	128	<u>287</u>	<u>510</u>	287	510	288	510	128	<u>287</u>	<u>510</u>	287	510	288	510
541.leela_r	128	408	519	<u>408</u>	<u>519</u>	408	520	128	<u>407</u>	<u>521</u>	408	520	406	522
548.exchange2_r	128	<u>273</u>	<u>1230</u>	274	1220	272	1230	128	271	1240	273	1230	<u>272</u>	<u>1230</u>
557.xz_r	128	<u>350</u>	<u>395</u>	348	397	378	366	128	<u>350</u>	<u>395</u>	348	397	378	366

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Operating System Notes (Continued)

variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/spec2017/amd_rate_aocc320_milanx_A_lib/lib;/spec2017/amd_rate_aocc320_  
    milanx_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalanckmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration:

DLWM Support = Disabled

SVM Mode = Disabled

NUMA nodes per socket = NPS4

APBDIS = 1

Fix SOC P-state = P0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

Engine Boost = Enabled
ACPI SRAT L3 Cache as NUMA Domain = Enabled
Memory Interleaving = Disabled

Sysinfo program /spec2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Tue May 3 13:27:24 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7573X 32-Core Processor
 2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

```
From lscpu from util-linux 2.33.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7573X 32-Core Processor
Stepping: 2
CPU MHz: 1833.467
CPU max MHz: 2800.0000
CPU min MHz: 1500.0000
BogoMIPS: 5589.63
Virtualization: AMD-V
L1d cache: 32K
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

```

L1i cache:          32K
L2 cache:           512K
L3 cache:           98304K
NUMA node0 CPU(s): 0-3,64-67
NUMA node1 CPU(s): 4-7,68-71
NUMA node2 CPU(s): 8-11,72-75
NUMA node3 CPU(s): 12-15,76-79
NUMA node4 CPU(s): 16-19,80-83
NUMA node5 CPU(s): 20-23,84-87
NUMA node6 CPU(s): 24-27,88-91
NUMA node7 CPU(s): 28-31,92-95
NUMA node8 CPU(s): 32-35,96-99
NUMA node9 CPU(s): 36-39,100-103
NUMA node10 CPU(s): 40-43,104-107
NUMA node11 CPU(s): 44-47,108-111
NUMA node12 CPU(s): 48-51,112-115
NUMA node13 CPU(s): 52-55,116-119
NUMA node14 CPU(s): 56-59,120-123
NUMA node15 CPU(s): 60-63,124-127
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 64313 MB
node 0 free: 64050 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 64507 MB
node 1 free: 64261 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 64509 MB
node 2 free: 64251 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

```

node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 64507 MB
node 3 free: 64250 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 64509 MB
node 4 free: 64282 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 64507 MB
node 5 free: 64280 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 64509 MB
node 6 free: 64242 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 64495 MB
node 7 free: 64228 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 64509 MB
node 8 free: 64288 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 64507 MB
node 9 free: 64288 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 64476 MB
node 10 free: 64237 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 64507 MB
node 11 free: 64283 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 64509 MB
node 12 free: 64291 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 64507 MB
node 13 free: 64286 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 64509 MB
node 14 free: 64288 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 64507 MB
node 15 free: 64288 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  1: 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  2: 12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
  3: 12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
  4: 12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
  5: 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

From /proc/meminfo

MemTotal: 1056665080 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="15-SP2"

VERSION_ID="15.2"

PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"

ID="sles"

ID_LIKE="suse"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64

x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full AMD retpoline,

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 May 3 09:09

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xf	199G	56G	144G	29%	/

From /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.
 Product: RS720A-E11-RS12E
 Product Family: Server
 Serial: 123456789012

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M386A8K40DM2-CWE 64 GB 4 rank 3200
16x Unknown Unknown

BIOS:

BIOS Vendor: American Megatrends Inc.
 BIOS Version: 0901
 BIOS Date: 11/23/2021
 BIOS Revision: 9.1

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Compiler Version Notes (Continued)

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 523.xalanbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

```

C++ benchmarks:

```

-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-inline-recursion=4

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

```
502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

```
505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-inline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-inline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
2.80 GHz, AMD EPYC 7573X

SPECrate®2017_int_base = 596

SPECrate®2017_int_peak = 624

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbk_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.6.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.6.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-05-03 01:27:24-0400.

Report generated on 2022-06-07 15:41:57 by CPU2017 PDF formatter v6442.

Originally published on 2022-06-07.