



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus  
(2.40 GHz, Intel Xeon Gold 6336Y)

**SPECrate®2017\_int\_base = 372**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Oct-2022

**Software Availability:** May-2022

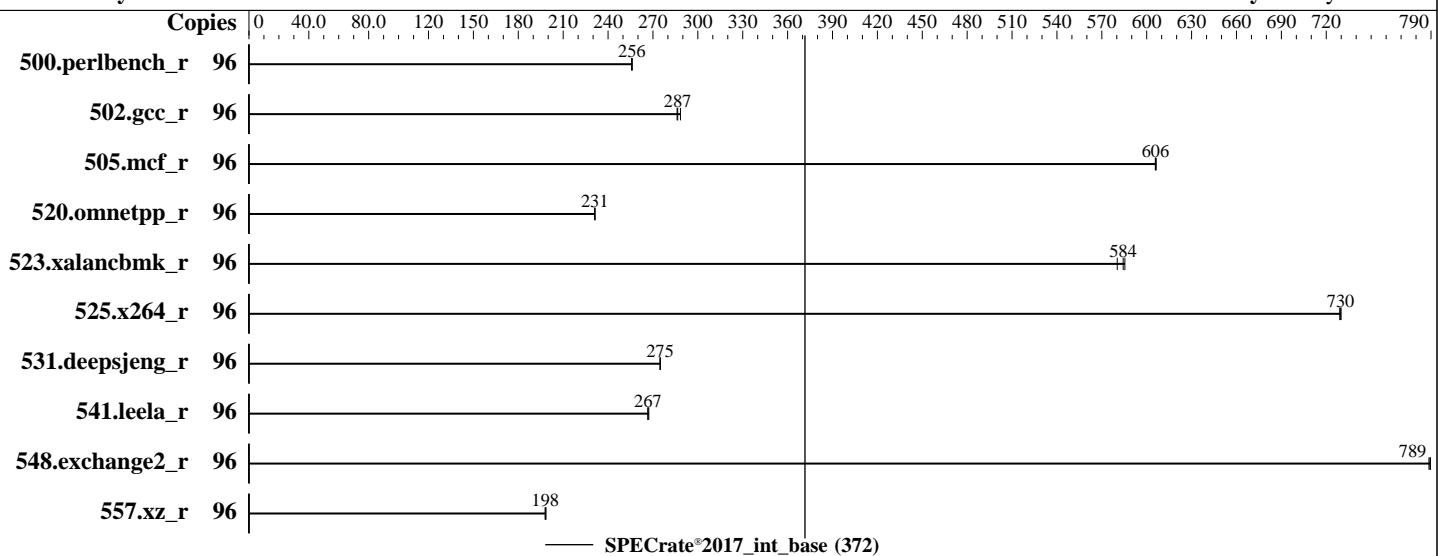

## Hardware

CPU Name: Intel Xeon Gold 6336Y  
Max MHz: 3600  
Nominal: 2400  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 36 MB I+D on chip per chip  
Other: None  
Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 480 GB SAS SSD, RAID 0  
Other: None

## OS:

Red Hat Enterprise Linux 8.3 (Ootpa)

Kernel 4.18.0-240.el8.x86\_64

C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;

No

HPE BIOS Version v1.68 10/27/2022 released Oct-2022

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

None

BIOS and OS set to prefer performance at the cost of additional power usage

Compiler:

Parallel:

Firmware:

File System:

System State:

Base Pointers:

Peak Pointers:

Other:

Power Management:

## Software



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus  
(2.40 GHz, Intel Xeon Gold 6336Y)

**SPECrate®2017\_int\_base = 372**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Oct-2022

Software Availability: May-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	598	256	<b>597</b>	<b>256</b>	597	256									
502.gcc_r	96	475	286	<b>474</b>	<b>287</b>	471	288									
505.mcf_r	96	256	606	256	606	<b>256</b>	<b>606</b>									
520.omnetpp_r	96	<b>545</b>	<b>231</b>	545	231	545	231									
523.xalancbmk_r	96	175	580	173	585	<b>174</b>	<b>584</b>									
525.x264_r	96	230	730	<b>230</b>	<b>730</b>	231	729									
531.deepsjeng_r	96	400	275	<b>400</b>	<b>275</b>	400	275									
541.leela_r	96	<b>596</b>	<b>267</b>	596	267	595	267									
548.exchange2_r	96	319	789	<b>319</b>	<b>789</b>	319	790									
557.xz_r	96	<b>523</b>	<b>198</b>	524	198	522	199									

**SPECrate®2017\_int\_base = 372**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus  
(2.40 GHz, Intel Xeon Gold 6336Y)

**SPECrate®2017\_int\_base = 372**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Oct-2022

**Software Availability:** May-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Advanced Memory Protection set to Advanced ECC

XPT Remote Prefetcher set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance set to Enabled

Thermal Configuration set to Maximum Cooling

Intel UPI Link Frequency set to Minimum

Intel UPI Link Enablement set to Single Link

D2K set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Energy Efficient Turbo set to Enabled

Adjacent Sector Prefetch set to Disabled

Intel UPI Link Power Management set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

```
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on localhost.localdomain Thu Jan 26 22:36:06 2023
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
 2 "physical id"s (chips)
 96 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
```

```
  cpu cores : 24
  siblings : 48
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
```

```
CPU op-mode(s):       32-bit, 64-bit
```

```
Byte Order:            Little Endian
```

```
CPU(s):               96
```

```
On-line CPU(s) list: 0-95
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus  
(2.40 GHz, Intel Xeon Gold 6336Y)

**SPECrate®2017\_int\_base = 372**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Oct-2022

**Software Availability:** May-2022

## Platform Notes (Continued)

```
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
Stepping: 6
CPU MHz: 1744.731
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 36864K
NUMA node0 CPU(s): 0-11,48-59
NUMA node1 CPU(s): 12-23,60-71
NUMA node2 CPU(s): 24-35,72-83
NUMA node3 CPU(s): 36-47,84-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnnowprefetch cpuid_fault ept epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpocntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 36864 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 48 49 50 51 52 53 54 55 56 57 58 59
node 0 size: 251640 MB
node 0 free: 254425 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 60 61 62 63 64 65 66 67 68 69 70 71
node 1 size: 251936 MB
node 1 free: 257729 MB
node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 72 73 74 75 76 77 78 79 80 81 82 83
node 2 size: 252068 MB
node 2 free: 251328 MB
node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 251977 MB
node 3 free: 257639 MB
node distances:
node 0 1 2 3
 0: 10 20 30 30
 1: 20 10 30 30
 2: 30 30 10 20
 3: 30 30 20 10
```

From /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus  
(2.40 GHz, Intel Xeon Gold 6336Y)

**SPECrate®2017\_int\_base = 372**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Oct-2022

**Software Availability:** May-2022

## Platform Notes (Continued)

```

MemTotal:           1056517224 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux"
    VERSION="8.3 (Ootpa)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="8.3"
    PLATFORM_ID="platform:el8"
    PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
    ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                                Bypass disabled via prctl and
                                                seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swaps
                                                barriers and __user pointer
                                                sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB:
                                                conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):  Not affected

run-level 3 Jan 26 22:16

SPEC is set to: /home/cpu2017
      Filesystem      Type  Size  Used Avail Use% Mounted on
      /dev/mapper/rhel-home xfs   372G  9.6G  362G   3% /home

From /sys/devices/virtual/dmi/id
  Vendor:          HPE
  Product:         Synergy 480 Gen10 Plus
  Product Family:  Synergy
  Serial:          CN70330Q5F

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus  
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017\_int\_base = 372

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Oct-2022

Software Availability: May-2022

## Platform Notes (Continued)

16x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor: HPE  
BIOS Version: I44  
BIOS Date: 10/27/2022  
BIOS Revision: 1.68  
Firmware Revision: 2.70

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran | 548.exchange2_r(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus  
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017\_int\_base = 372

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Oct-2022

Software Availability: May-2022

## Base Portability Flags (Continued)

505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-ICX-revJ.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-ICX-revJ.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus  
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECrate®2017\_int\_base = 372

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Oct-2022

Software Availability: May-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-26 12:06:06-0500.

Report generated on 2024-01-29 17:22:18 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-14.