



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

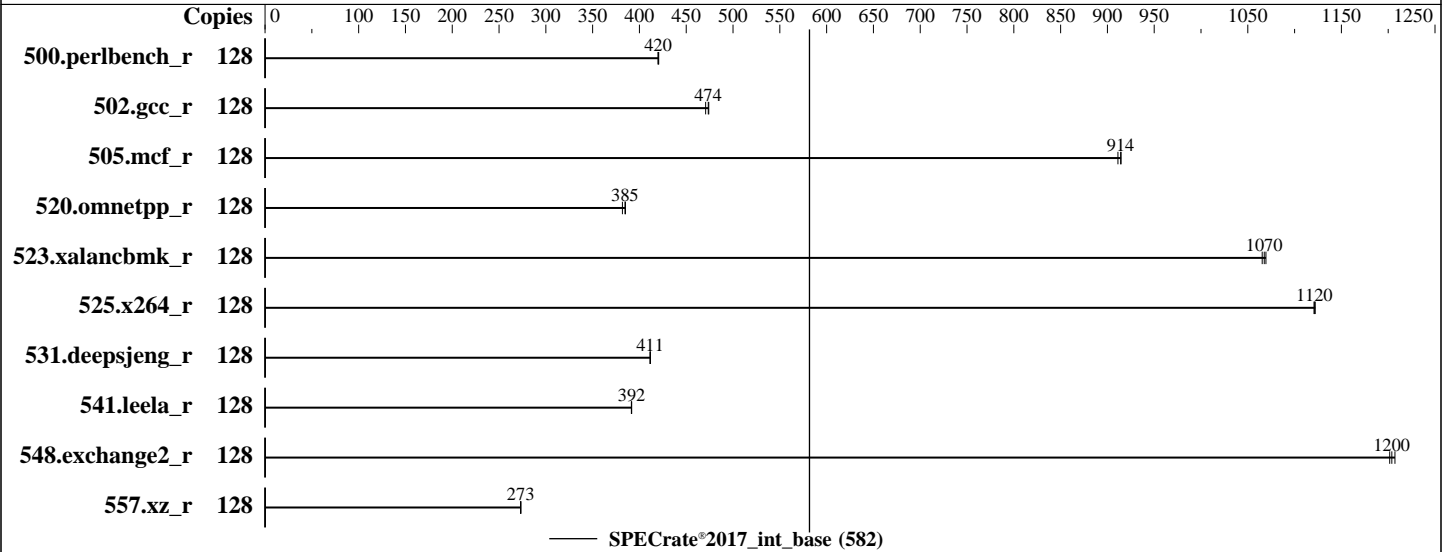

Hardware

CPU Name: Intel Xeon Gold 6448Y
 Max MHz: 4100
 Nominal: 2100
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x SATA M.2 SSD, 480GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.24.33-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for
 D3985-A1x. Released Mar-2023
 tested as V1.0.0.0 R0.30.2 for D3985-A1x Jan-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	484	421	<u>485</u>	<u>420</u>	485	420							
502.gcc_r	128	385	471	382	474	<u>383</u>	<u>474</u>							
505.mcf_r	128	226	915	<u>226</u>	<u>914</u>	227	911							
520.omnetpp_r	128	<u>437</u>	<u>385</u>	440	382	436	385							
523.xalancbmk_r	128	<u>127</u>	<u>1070</u>	126	1070	127	1070							
525.x264_r	128	200	1120	200	1120	<u>200</u>	<u>1120</u>							
531.deepsjeng_r	128	356	412	<u>357</u>	<u>411</u>	357	411							
541.leela_r	128	542	391	<u>541</u>	<u>392</u>	541	392							
548.exchange2_r	128	278	1210	279	1200	<u>279</u>	<u>1200</u>							
557.xz_r	128	506	273	506	273	<u>506</u>	<u>273</u>							

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
cpupower -c all frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
"/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/lib/ia32:/home/Benchmark/speccpu/je5.0.1-32"
```

```
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
 DCU Streamer Prefetcher = Disabled
 Package C State limit = C0
 CPU Performance Boost = Aggressive
 SNC (Sub NUMA) = Enable SNC2
 FAN Control = Full

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Fri Feb 17 21:24:29 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Linux localhost 5.14.21-150400.24.33-default #1 SMP PREEMPT_DYNAMIC Fri Nov 4 13:55:06 UTC 2022 (76cfe60)
x86_64 x86_64 x86_64 GNU/Linux

```

2. w
  21:24:29 up 5 min,  2 users,  load average: 0.07, 1.26, 0.85
USER  TTY      FROM             LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -                21:19   13.00s  1.99s  0.15s  -bash
root  pts/0   10.41.49.27     21:20   37.00s  0.07s  0.07s  -bash

```

```

3. Username
  From environment variable $USER:  root

```

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4125251
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4125251
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu

```

```

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6448Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 32

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
siblings          : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6448Y
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               8
CPU max MHz:            4100.0000
CPU min MHz:            800.0000
BogoMIPS:               4200.00
Flags:                  fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat_pse36
                        clflush_dts_acpi_mmx_fxsr_sse_sse2_ss_ht_tm_pbe_syscall_nx_pdpelgb_rdtscp
                        lm_constant_tsc_art_arch_perfmmon_pebs_bts_rep_good_nopl_xtopology
                        nonstop_tsc_cpuid_aperfperf_tsc_known_freq_pni_pclmulqdq_dtes64_monitor
                        ds_cpl_vmx_smx_est_tm2_ssse3_sdbg_fma_cx16_xtpr_pdc_mpcid_dca_sse4_1
                        sse4_2_x2apic_movbe_popcnt_tsc_deadline_timer_aes_xsave_avx_f16c_rdrand
                        lahf_lm_abm_3dnowprefetch_cpuid_fault_epb_cat_l3_cat_l2_cdp_l3
                        invpcid_single_intel_ppin_cdp_l2_ssb_mba_ibrs_ibpb_stibp_ibrs_enhanced
                        tpr_shadow_vnmi_flexpriority_ept_vpid_ept_ad_fsgsbase_tsc_adjust_bmi1_hle
                        avx2_smep_bmi2_erms_invpcid_rtm_cqm_rdt_a_avx512f_avx512dq_rdseed_adx_smap
                        avx512ifma_clflushopt_clwb_intel_pt_avx512cd_sha_ni_avx512bw_avx512vl
                        xsaveopt_xsavec_xgetbv1_xsaves_cqm_llc_cqm_occup_llc_cqm_mbm_total
                        cqm_mbm_local_split_lock_detect_avx_vnni_avx512_bf16_wbnoinvd_dtherm_ida
                        arat_pln_pts_hwp_hwp_act_window_hwp_epp_hwp_pkg_req_avx512vbmi_umip_pku
                        ospke_waitpkg_avx512_vbmi2_gfni_vaes_vpclmulqdq_avx512_vnni_avx512_bitalg
                        tme_avx512_vpopcntdq_la57_rdpid_bus_lock_detect_cldemote_movdiri_movdir64b
                        enqcmd_fsrn_md_clear_serialize_tsxldtrk_pconfig_arch_lbr_avx512_fp16
                        amx_tile_flush_lld_arch_capabilities
Virtualization:         VT-x
L1d cache:              3 MiB (64 instances)
L1i cache:              2 MiB (64 instances)
L2 cache:               128 MiB (64 instances)
L3 cache:               120 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-15,64-79
NUMA node1 CPU(s):     16-31,80-95
NUMA node2 CPU(s):     32-47,96-111
NUMA node3 CPU(s):     48-63,112-127
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability L1tf: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Mmio stale data: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 257620 MB
node 0 free: 256817 MB
node 1 cpus: 16-31,80-95
node 1 size: 258039 MB
node 1 free: 257392 MB
node 2 cpus: 32-47,96-111
node 2 size: 258005 MB
node 2 free: 257278 MB
node 3 cpus: 48-63,112-127
node 3 size: 257671 MB
node 3 free: 256978 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056089704 kB

10. who -r

run-level 3 Feb 17 21:19

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime      systemd-remount-fs
disabled             autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                    firewallld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
                    lunmask man-db-create multipathd nfs nfs-blkmap numad rdisc rpcbind rpmconfigcheck rsyncd
                    serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                    systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect             wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.24.33-default
root=UUID=f9734f28-f8af-4b76-850e-33671a0d361c
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=321M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----
```

```
-----
19. Disk information
SPEC is set to: /home/Benchmark/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 445G 54G 392G 12% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor: FUJITSU
Product: PRIMERGY TX2550 M7
Product Family: SERVER
Serial: EWCCxxxxxx
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R0.30.2 for D3985-A1x
BIOS Date: 01/24/2023
BIOS Revision: 0.30
Firmware Revision: 2.0
-----
```

Compiler Version Notes

```
=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6448Y,
2.10GHz

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-17 07:24:28-0500.

Report generated on 2024-01-29 17:26:16 by CPU2017 PDF formatter v6716.

Originally published on 2023-03-22.