



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

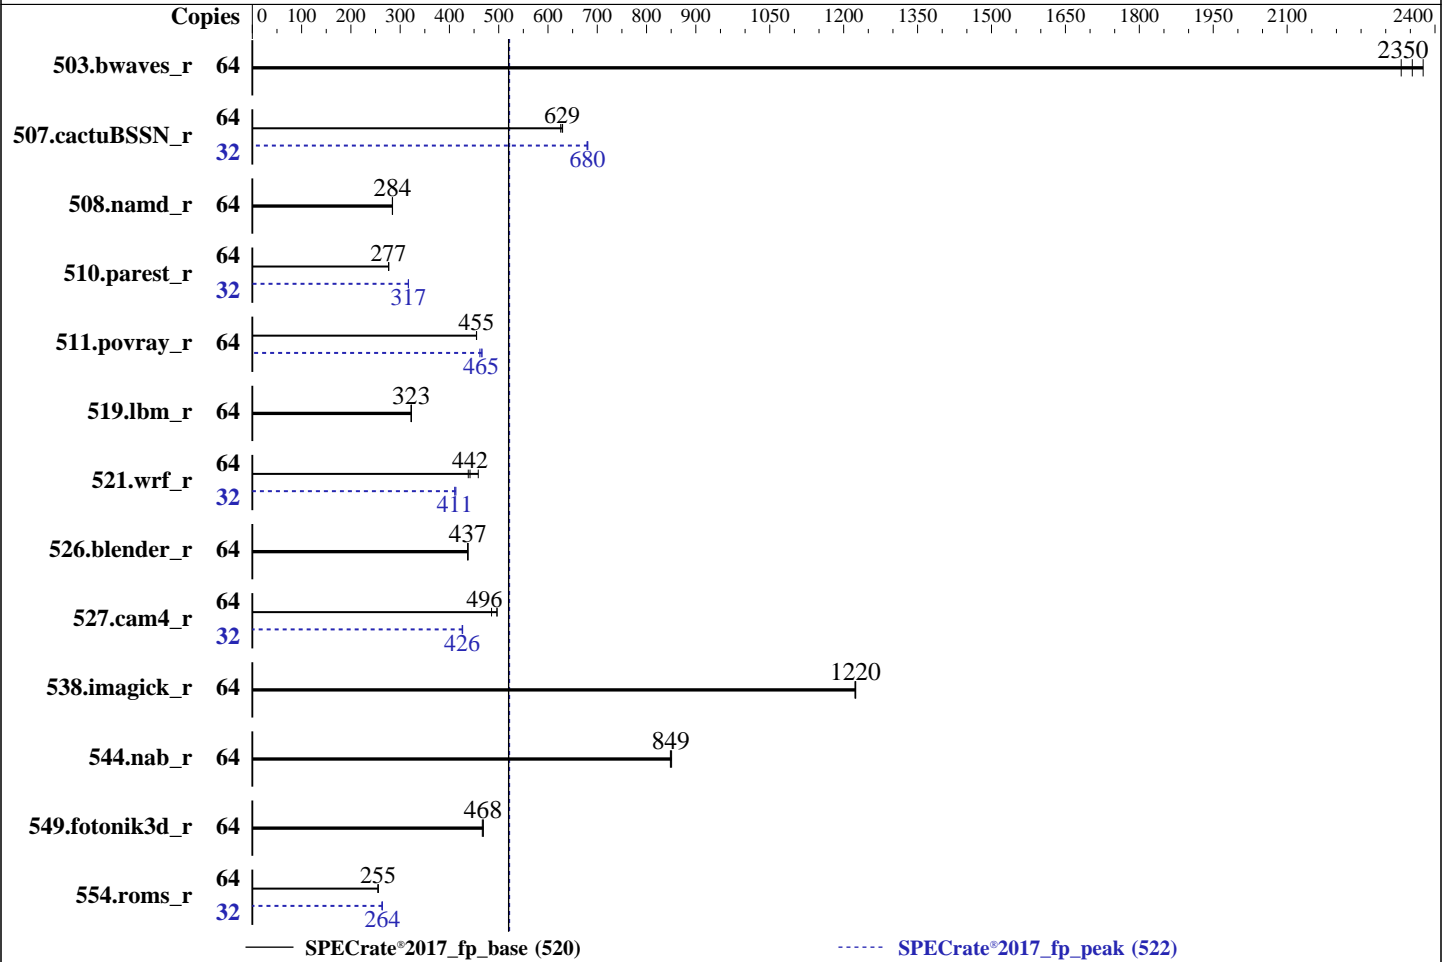

Hardware

CPU Name: Intel Xeon Gold 6444Y
 Max MHz: 4000
 Nominal: 3600
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 5.1.1a released Feb-2023
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	275	2330	270	2380	<u>273</u>	<u>2350</u>	64	275	2330	270	2380	<u>273</u>	<u>2350</u>
507.cactuBSSN_r	64	<u>129</u>	<u>629</u>	129	626	129	630	32	<u>59.6</u>	<u>680</u>	59.5	681	59.6	679
508.namd_r	64	<u>214</u>	<u>284</u>	214	284	214	285	64	<u>214</u>	<u>284</u>	214	284	214	285
510.parest_r	64	605	277	605	277	<u>605</u>	<u>277</u>	32	264	317	<u>264</u>	<u>317</u>	264	317
511.povray_r	64	328	455	<u>328</u>	<u>455</u>	329	455	64	320	466	<u>322</u>	<u>465</u>	324	462
519.lbm_r	64	209	323	<u>209</u>	<u>323</u>	209	322	64	209	323	<u>209</u>	<u>323</u>	209	322
521.wrf_r	64	313	459	<u>325</u>	<u>442</u>	327	438	32	174	413	174	411	<u>174</u>	<u>411</u>
526.blender_r	64	223	438	<u>223</u>	<u>437</u>	223	437	64	223	438	<u>223</u>	<u>437</u>	223	437
527.cam4_r	64	231	485	<u>225</u>	<u>496</u>	225	497	32	131	427	<u>131</u>	<u>426</u>	131	426
538.imagick_r	64	130	1220	<u>130</u>	<u>1220</u>	130	1220	64	130	1220	<u>130</u>	<u>1220</u>	130	1220
544.nab_r	64	127	848	<u>127</u>	<u>849</u>	127	851	64	127	848	<u>127</u>	<u>849</u>	127	851
549.fotonik3d_r	64	<u>533</u>	<u>468</u>	532	469	534	467	64	<u>533</u>	<u>468</u>	532	469	534	467
554.roms_r	64	399	255	<u>398</u>	<u>255</u>	398	255	32	<u>193</u>	<u>264</u>	193	264	193	263

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Sub NUMA Clustering set to Enable SNC4
LLC Dead Line set to Disabled
ADDDC Sparing set to Disabled
Processor C6 Report set to Enabled
UPI Link Enablement 2
UPI Power Management Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Apr 22 07:55:43 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
-
2. w
07:55:43 up 2 min, 1 user, load average: 0.15, 0.09, 0.03

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	07:54	7.00s	1.09s	0.12s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4126952
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4126952
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --action=build --action validate --define default-platform-flags --define numcopies=64 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
fprate
runcpu --action build --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.013/templogs/preenv.fprate.013.0.log --lognum 013.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6444Y
vendor_id      : GenuineIntel
cpu family      : 6
model          : 143
stepping       : 8
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

physical id 0: apicids 0-31
physical id 1: apicids 128-159

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      64
On-line CPU(s) list:        0-63
Vendor ID:                   GenuineIntel
Model name:                  Intel(R) Xeon(R) Gold 6444Y
CPU family:                  6
Model:                       143
Thread(s) per core:         2
Core(s) per socket:         16
Socket(s):                   2
Stepping:                    8
CPU max MHz:                 4000.0000
CPU min MHz:                 800.0000
BogoMIPS:                    7200.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                             clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                             lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                             nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                             ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                             sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                             lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                             invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                             tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                             avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                             xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                             ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                             tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                             enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                             amx_tile flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   1.5 MiB (32 instances)
L1i cache:                   1 MiB (32 instances)
L2 cache:                    64 MiB (32 instances)
L3 cache:                    90 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-7,32-39
NUMA node1 CPU(s):          8-15,40-47
NUMA node2 CPU(s):          16-23,48-55
NUMA node3 CPU(s):          24-31,56-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 257659 MB
node 0 free: 256517 MB
node 1 cpus: 8-15,40-47
node 1 size: 258043 MB
node 1 free: 257732 MB
node 2 cpus: 16-23,48-55
node 2 size: 258043 MB
node 2 free: 257736 MB
node 3 cpus: 24-31,56-63
node 3 size: 258014 MB
node 3 free: 257553 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056523948 kB

10. who -r

run-level 3 Apr 22 07:53

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4
wicked-dhcp4 wicked-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once
haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask
man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=45ccfaea-2135-4a76-bdc1-8f20fdd7be73
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
```

15. sysctl

```
kernel.numa_balancing           1
kernel.randomize_va_space       2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   20
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size   2097152
shmem_enabled    always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs   60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

19. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       btrfs 60G   17G   43G   28% /home
```

20. /sys/devices/virtual/dmi/id

```
Vendor:      Cisco Systems Inc
Product:     UCSX-210C-M7
Serial:      FCH263873HH
```

21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
15x 0xAD00 HMC94MEBRA121N 64 GB 2 rank 4800
1x 0xAD00 HMC94MEBRA123N 64 GB 2 rank 4800
```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Cisco Systems, Inc.
BIOS Version:     X210M7.5.1.1a.0.0201231806
BIOS Date:        02/01/2023
BIOS Revision:    5.29
```

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6444Y, 3.60GHz)

SPECrate®2017_fp_base = 520

SPECrate®2017_fp_peak = 522

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-22 07:55:43-0400.

Report generated on 2023-05-09 16:04:39 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.