



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

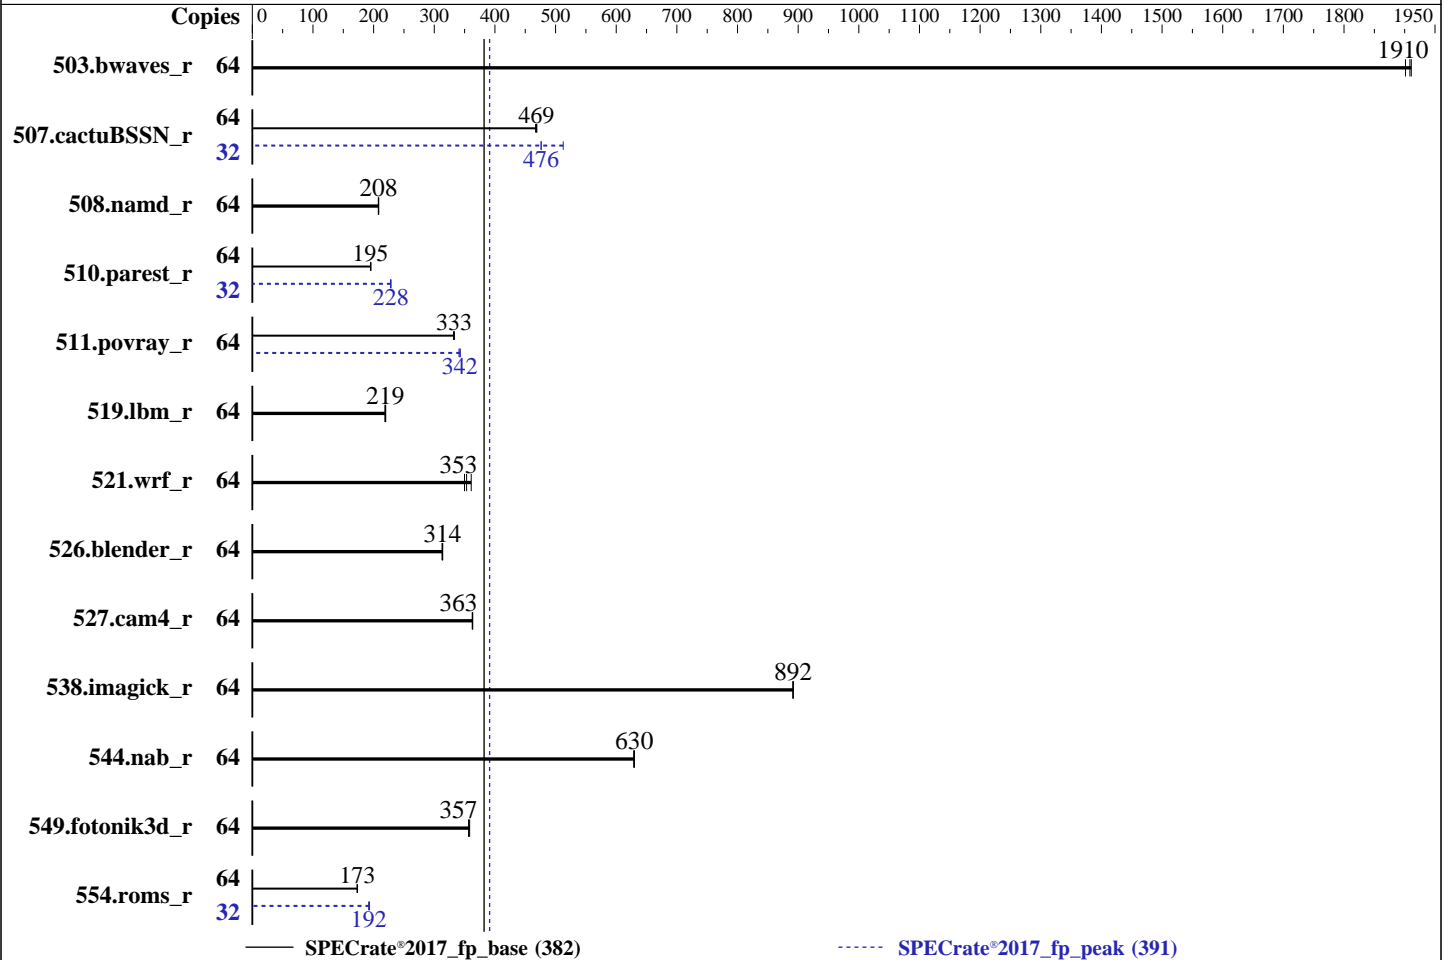

Hardware

CPU Name: Intel Xeon Gold 5416S
 Max MHz: 4000
 Nominal: 2000
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.30 03/01/2023 released Mar-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Mar-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	336	1910	<u>336</u>	<u>1910</u>	338	1900	64	336	1910	<u>336</u>	<u>1910</u>	338	1900
507.cactuBSSN_r	64	<u>173</u>	<u>469</u>	173	467	173	469	32	85.1	476	79.0	513	<u>85.0</u>	<u>476</u>
508.namd_r	64	292	208	293	208	<u>292</u>	<u>208</u>	64	292	208	293	208	<u>292</u>	<u>208</u>
510.parest_r	64	<u>859</u>	<u>195</u>	856	196	859	195	32	<u>367</u>	<u>228</u>	366	228	367	228
511.povray_r	64	450	332	<u>449</u>	<u>333</u>	449	333	64	<u>436</u>	<u>342</u>	436	343	439	341
519.lbm_r	64	307	220	309	219	<u>307</u>	<u>219</u>	64	307	220	309	219	<u>307</u>	<u>219</u>
521.wrf_r	64	<u>406</u>	<u>353</u>	410	350	397	361	64	<u>406</u>	<u>353</u>	410	350	397	361
526.blender_r	64	312	313	311	314	<u>311</u>	<u>314</u>	64	312	313	311	314	<u>311</u>	<u>314</u>
527.cam4_r	64	308	363	<u>308</u>	<u>363</u>	309	363	64	308	363	<u>308</u>	<u>363</u>	309	363
538.imagick_r	64	179	891	<u>178</u>	<u>892</u>	178	892	64	179	891	<u>178</u>	<u>892</u>	178	892
544.nab_r	64	171	629	171	630	<u>171</u>	<u>630</u>	64	171	629	171	630	<u>171</u>	<u>630</u>
549.fotonik3d_r	64	696	358	<u>699</u>	<u>357</u>	699	357	64	696	358	<u>699</u>	<u>357</u>	699	357
554.roms_r	64	<u>587</u>	<u>173</u>	588	173	587	173	32	263	193	265	192	<u>265</u>	<u>192</u>

SPECrate®2017_fp_base = **382**

SPECrate®2017_fp_peak = **391**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0001b0 for the Intel Xeon Gold 5416S processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance Profile set to Aggressive

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Fri Mar 31 17:29:21 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.e19_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Mar-2023

Platform Notes (Continued)

1. `uname -a`
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

2. `w`
17:29:21 up 15 min, 0 users, load average: 0.00, 0.00, 0.00
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. `ulimit -a`
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4127214
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4127214
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/SPR_fprate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. `/proc/cpuinfo`
model name : Intel(R) Xeon(R) Gold 5416S
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 8

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Mar-2023

Platform Notes (Continued)

```
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 5416S
BIOS Model name:       Intel(R) Xeon(R) Gold 5416S
CPU family:            6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
Stepping:               8
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              60 MiB (2 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-15,32-47
NUMA node1 CPU(s):    16-31,48-63
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Mar-2023

Platform Notes (Continued)

Vulnerability Lluf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 515801 MB
node 0 free: 514476 MB
node 1 cpus: 16-31,48-63
node 1 size: 516041 MB
node 1 free: 515163 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10

```

9. /proc/meminfo

MemTotal: 1056607836 kB

10. who -r

run-level 3 Mar 31 17:14

11. Systemd service manager version: systemd 250 (250-6.e19_0)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ irqbalance iscsi iscsi-onboot kdump libstoragemgmt lvm2-monitor mdmonitor microcode multipathd nis-domainname rhsmcertd rpcbind rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator udisks2 upower virtqemu
enabled-runtime	systemd-remount-fs
disabled	blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell dnsmasq gssproxy httpd httpd@ hwloc-dump-hwdata ipa-custodia iscsid iscsiui kvm_stat libvirt-guests libvirtd man-db-restart-cache-update ndctl-monitor nfs-blkmap nfs-server nftables nmb numad pmcd pmfind pmie pmie_farm pmlogger pmlogger_farm pmpoxy radiusd rdisc rhsm rhsm-facts rpmdm-rebuild saslauthd serial-getty@ smb speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysexrt virtnetworkd virtproxyd virtsecret virtstoraged

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

Platform Notes (Continued)

indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd virtlogd

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing            1
kernel.randomize_va_space       2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   20
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag            always defer defer+madvice [madvice] never
enabled           [always] madvice never
hpage_pmd_size   2097152
shmem_enabled    always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs   60000
defrag                   1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs    10000

```

18. OS release

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Mar-2023

Platform Notes (Continued)

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

19. Disk information

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   372G  201G  172G   54% /home
```

20. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:     ProLiant ML350 Gen11
Product Family: ProLiant
Serial:      CNX20800P7
```

21. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix HMC94MEBRA121N 64 GB 2 rank 4800, configured at 4400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      HPE
BIOS Version:     1.30
BIOS Date:        03/01/2023
BIOS Revision:    1.30
Firmware Revision: 1.20
```

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Mar-2023

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Mar-2023

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Gold 5416S)

SPECrate®2017_fp_base = 382

SPECrate®2017_fp_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-31 07:59:21-0400.

Report generated on 2023-05-23 19:11:08 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.