



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

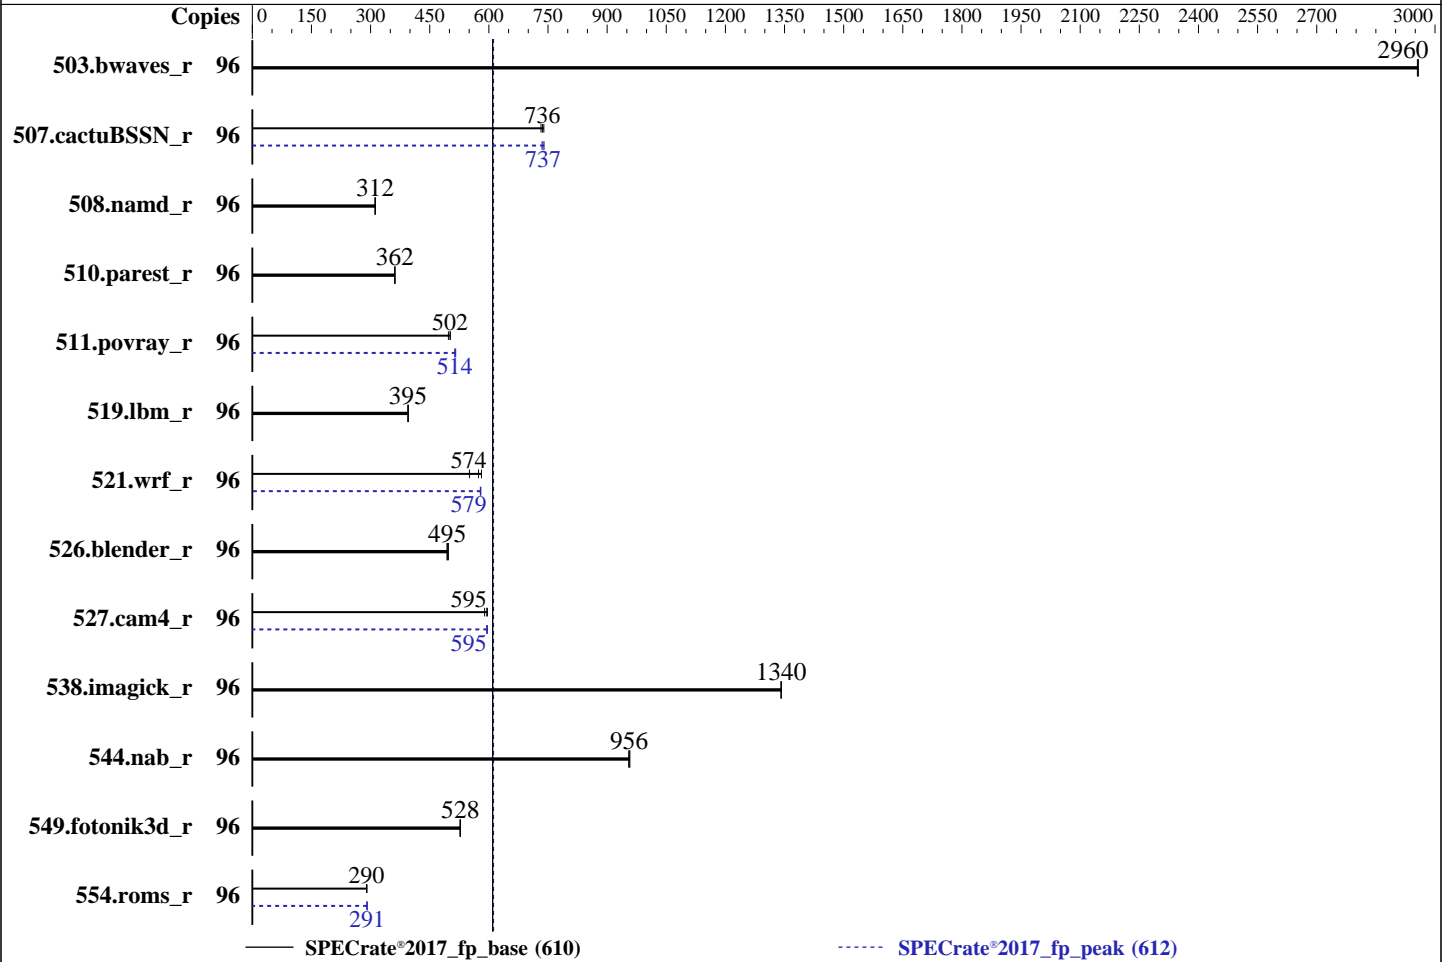

### Hardware

CPU Name: Intel Xeon Gold 6418H  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 1920 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 2.00.55 Released Mar-2023  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jul-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	326	2960	326	2960	<u>326</u>	<u>2960</u>	96	326	2960	326	2960	<u>326</u>	<u>2960</u>
507.cactuBSSN_r	96	<u>165</u>	<u>736</u>	166	732	164	739	96	165	735	164	740	<u>165</u>	<u>737</u>
508.namd_r	96	293	311	292	312	<u>293</u>	<u>312</u>	96	293	311	292	312	<u>293</u>	<u>312</u>
510.parest_r	96	<u>695</u>	<u>362</u>	694	362	695	361	96	<u>695</u>	<u>362</u>	694	362	695	361
511.povray_r	96	<u>447</u>	<u>502</u>	446	502	451	497	96	436	514	<u>436</u>	<u>514</u>	434	516
519.lbm_r	96	<u>256</u>	<u>395</u>	256	396	256	395	96	<u>256</u>	<u>395</u>	256	396	256	395
521.wrf_r	96	370	581	<u>375</u>	<u>574</u>	390	551	96	371	580	372	578	<u>371</u>	<u>579</u>
526.blender_r	96	294	497	<u>296</u>	<u>495</u>	296	494	96	294	497	<u>296</u>	<u>495</u>	296	494
527.cam4_r	96	<u>282</u>	<u>595</u>	285	589	282	596	96	282	595	<u>282</u>	<u>595</u>	282	596
538.imagick_r	96	178	1340	178	1340	<u>178</u>	<u>1340</u>	96	178	1340	178	1340	<u>178</u>	<u>1340</u>
544.nab_r	96	<u>169</u>	<u>956</u>	169	955	169	958	96	<u>169</u>	<u>956</u>	169	955	169	958
549.fotonik3d_r	96	710	527	<u>709</u>	<u>528</u>	709	528	96	710	527	<u>709</u>	<u>528</u>	709	528
554.roms_r	96	<u>526</u>	<u>290</u>	525	291	527	290	96	525	291	524	291	<u>524</u>	<u>291</u>

SPECrate®2017\_fp\_base = 610

SPECrate®2017\_fp\_peak = 612

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/spec2017-icc2023.0/lib/intel64:/spec2017-icc2023.0/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /spec2017-icc2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Wed Jul 5 16:17:03 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
16:17:03 up 2:58, 1 user, load average: 61.38, 87.60, 92.66  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty2 13:23 2:53m 1.26s 0.07s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 610

### FusionServer 2288H V7 (Intel Xeon Gold 6418H)

## SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060130
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060130
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 96 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define
smt-on --define cores=48 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base,peak --iterations 3 -o all fprate
runcpu --define default-platform-flags --copies 96 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --iterations 3 --output_format all
--nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.069/temlogs/preenv.fprate.069.0.log --lognum 069.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec2017-icc2023.0
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6418H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b000111
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 610

### FusionServer 2288H V7 (Intel Xeon Gold 6418H)

## SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6418H
BIOS Model name:      Intel(R) Xeon(R) Gold 6418H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):             2
Stepping:              7
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             2.3 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-11,48-59
NUMA node1 CPU(s):    12-23,60-71
NUMA node2 CPU(s):    24-35,72-83
NUMA node3 CPU(s):    36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

Virtualization: VT-x

L1d cache: 2.3 MiB (48 instances)

L1i cache: 1.5 MiB (48 instances)

L2 cache: 96 MiB (48 instances)

L3 cache: 120 MiB (2 instances)

NUMA node(s): 4

NUMA node0 CPU(s): 0-11,48-59

NUMA node1 CPU(s): 12-23,60-71

NUMA node2 CPU(s): 24-35,72-83

NUMA node3 CPU(s): 36-47,84-95

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 610

### FusionServer 2288H V7 (Intel Xeon Gold 6418H)

## SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 128080 MB
node 0 free: 120048 MB
node 1 cpus: 12-23,60-71
node 1 size: 129018 MB
node 1 free: 123408 MB
node 2 cpus: 24-35,72-83
node 2 size: 128982 MB
node 2 free: 123413 MB
node 3 cpus: 36-47,84-95
node 3 size: 129007 MB
node 3 free: 123454 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527452056 kB

10. who -r

run-level 5 Jul 5 13:18

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

Default Target	Status
graphical	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgauthd vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

dbus-daemon debug-shell dnsmasq firewalld iprump iprinit iprupdate iscsid iscsiuiio kpatch  
kvm\_stat ledmon man-db-restart-cache-update nftables nvme-autoconnect podman  
podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts  
rpmdb-rebuild serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures  
systemd-pstore systemd-sysext wpa\_supplicant  
indirect  
spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-70.13.1.el9\_0.x86\_64  
root=UUID=cc4bab05-907e-44ef-b818-2b2874390234  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=UUID=5ba347ca-8beb-4f6e-9c11-de63dc4ddf5f  
rhgb  
quiet

-----  
15. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

-----  
19. OS release

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

-----  
20. Disk information

```
SPEC is set to: /spec2017-icc2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   420G  78G  343G  19% /
```

-----  
21. /sys/devices/virtual/dmi/id

```
Vendor:      XFUSION
Product:     2288H V7
Product Family: Eagle Stream
Serial:      serial
```

-----  
22. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      XFUSION
BIOS Version:     2.00.55
BIOS Date:        03/07/2023
BIOS Revision:    0.55
```

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Compiler Version Notes (Continued)

```

C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jul-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using both C and C++:  
icpx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 610

FusionServer 2288H V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_fp\_peak = 612

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes  
538.imagick\_r: basepeak = yes  
544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes  
510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes  
549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_fp\_base = 610**

**FusionServer 2288H V7 (Intel Xeon Gold 6418H)**

**SPECrate®2017\_fp\_peak = 612**

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Jul-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-05 16:17:02-0400.

Report generated on 2023-08-18 11:04:11 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-18.